

Network Interface Board GX4

For Machine Code: J012, J013


(Code:J510-17)

INSTALLATION GUIDE

This manual describes how to use the GX 3000S and GX 3000SF models. (Illustrations are based on the GX 3000SF model.)

Important

- ☐ Be sure to unplug the machine before installing or removing the network interface board.
- ☐ Do not subject the network interface board to impact or other physical stress.




AQG149S

1. Ethernet cable connector


- 1** Check that the power cord of the machine is not plugged in.

- 2** Lift the connector cover.

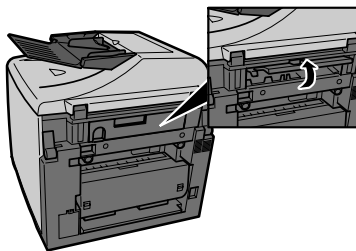

AQG137S

- 3** Check the network interface board's orientation, and then install the network interface board gently.

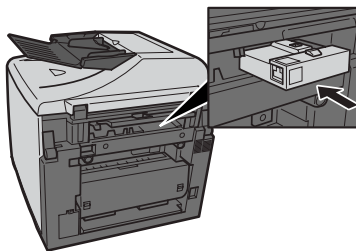

AQR223S

- 4** Close the connector cover.

Note

- ☐ Be sure to push the network interface board fully into the machine.
- ☐ To check whether the network interface board has been installed correctly, press the Menu key and check the menu. If the network interface board has been installed correctly, "Network Settings" appears in the menu.
- ☐ If the network interface board is not installed properly, repeat the entire installation procedure.
- ☐ If you cannot install it properly even after attempting reinstallation, contact your sales or service representative.

Reference

For details about connecting the Ethernet cable and specifying the network settings, see Quick Installation Guide.