



Notes for Administrators:
Using This Machine in a Network Environment
Compliant with IEEE Std 2600.2™-2009

TABLE OF CONTENTS

1. Notes for Administrators

Introduction.....	3
Before Applying the Security Functions.....	3
CC-Certified Operating Environment.....	4
MFPs Explained in This Manual.....	5
Checking Versions for CC Conformance.....	5
Manuals.....	7
Options.....	20
Preparation for Use.....	22
Specifying the MFP Settings.....	22
Procedure 1: Settings to Specify Using the Control Panel.....	22
Procedure 2: Settings to Specify Using Web Image Monitor.....	31
Procedure 3: Settings to Specify Using the Control Panel.....	40
Checking the MFP Settings.....	41
Changing MFP Settings During Operation.....	43
Notes for Setting Up and Operation.....	50
Trademarks.....	52



1. Notes for Administrators

Introduction

This product is a multifunction printer (MFP) certified in an operating environment complying with the requirements of the Common Criteria for Information Technology Security Evaluation (CC certification). Be sure to read the booklet carefully and understand its contents thoroughly.

The official name of IEEE Std 2600.2™-2009 is U.S. Government Approved Protection Profile - U.S. Government Protection Profile for Hardcopy Devices Version 1.0 (IEEE Std 2600.2™-2009) (Version: 1.0).

Before Applying the Security Functions

The person responsible for acquiring this machine must appoint competent personnel as the administrators (including the machine supervisor) and instruct them to read the administrator manuals listed below.

- Security Guide
- Getting Started
- Notes for Administrators: Using This Machine in a Network Environment Compliant with IEEE Std 2600.2™-2009


To securely operate the machine, administrators must keep these manuals handy.

All other manuals are for general users.

Before applying any security functions, administrators must read and fully understand "Before Configuring the Security Function Settings" in Security Guide.

CC-Certified Operating Environment

CC evaluation was performed under the following environment.

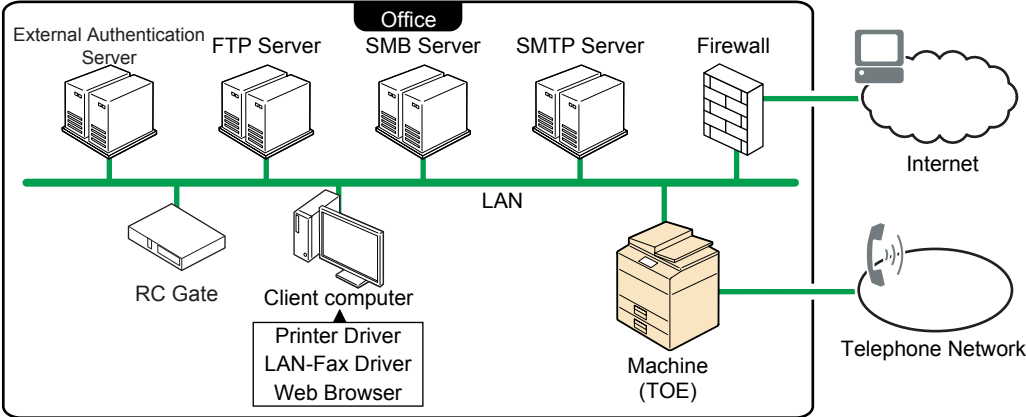

CJL010

IT Products	Names/Versions of Evaluated IT Products
External Authentication Server	Windows Server 2008 and 2012
Printer Driver	PCL6 Driver Ver.1.1.0.0
LAN-Fax Driver	LAN-Fax Driver Ver.5.1.0.0
Web Browser	Internet Explorer 7.0, 8.0, 9.0 and 10.0 for Windows
RC Gate RC Gate is a device for @Remote Service.	Remote Communication Gate A Remote Communication Gate Type BN1 Remote Communication Gate Type BM1

★ Important

- You can connect necessary IT products to the MFP over the network or telephone line in your operating environment.
- If this machine's LAN (local area network) is connected to an external network, be sure to use a firewall or some other means to block any unused ports. Check which ports are required and block any that are not.
- Use only CC-conformant or later (post-CC-conformant) versions of the PCL6 and LAN-Fax drivers. If you use a post-CC-conformant driver version, check the revision history to make sure there has been no security-related revision to the CC-conformant version. You can download the drivers from the manufacturer's web site.

- To install the LAN-Fax driver, enter the machine's IP address or host name in the [Printer URL] box as follows (also described in "Using the SmartDeviceMonitor for Client port" in "Specifying the Port When Installing the LAN-FAX Driver" in "Installing the LAN-Fax Driver", Driver Installation Guide):
 - [https://\(machine's IP address or host name\)/printer](https://(machine's IP address or host name)/printer)
- To install the printer driver, enter the machine's IP address or host name in the [URL:] box as follows (also described in "Using the IPP Port" in "Installing the Printer Driver for the Selected Port", Driver Installation Guide):
 - [https://\(machine's IP address or host name\)/printer](https://(machine's IP address or host name)/printer)

MFPs Explained in This Manual

Check that the MFP you are using is listed below:

Ricoh MP 401SPF, Ricoh SP 451OSF,
Savin MP 401SPF, Savin SP 451OSF,
Lanier MP 401SPF, Lanier SP 451OSF,
nashuatec MP 401SPF, nashuatec SP 451OSF,
Rex-Rotary MP 401SPF, Rex-Rotary SP 451OSF,
Gestetner MP 401SPF, Gestetner SP 451OSF,
infotec MP 401SPF

Checking Versions for CC Conformance

The version of CC-certified target of evaluation (TOE) is E-1.02. The versions of the firmware and hardware corresponding to version E-1.02 TOE are shown below. When using an MFP, you can display the firmware and hardware versions.

Primary Classification	Secondary Classification	Version
Firmware	System/Copy	1.05
	Network Support	13.21
	Fax	05.00.00
	RemoteFax	05.00.00
	Scanner	01.05
	Web Support	1.07
	Web Uapl	1.04
	animation	1.01
	NetworkDocBox	1.01
	Printer	1.05
	RPCS	3.14.3
	Font EXP	1.00
	PCL	1.05
	PCL Font	1.14
	PS3	1.00
	PDF	1.02
	PS3 Font	1.11
	Data Erase Onb	1.03m
	GWFCU3.8-4(WW)	03.00.00
	PowerSaving Sys	F.18
	Engine	1.19:09
	OpePanel	1.07
Hardware	Ic Key	01020714
	Ic Hdd	3330

You can check the firmware and hardware versions from the control panel as follows:

1. Press the [User Tools/Counter] key.
2. Log on as the administrator ("admin").
3. Press [System Settings].
4. Press [Administrator Tools].
5. Press [Firmware Version].

Bank entries that have not been subject to CC-certifications may appear in the firmware version display. These units may be attached to the machine and used.

Manuals

The reference numbers of the CC-certified manuals and the model numbers of the machines covered by the manuals are as follows:

Identifying the model

SP 4510SF


- Mainly Europe
"-27"
- Mainly North America
"-17"
- Mainly Asia
"-27"

MP 401SPF

- Mainly Europe
"-27"
- Mainly North America
"-17"
- Mainly Asia
"-29"

In the following example, the machine's model number ends with "-27".

1. Check the label on the rear of the machine to identify the model.

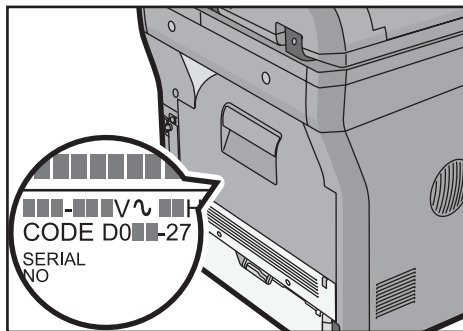

CJL022

2. Check whether the model number on the label ends with "-27".

★ Important

- Do not use the supplied "SP 4510SF User Guide" and "MP 401SPF User Guide" or the manuals on the supplied CD-ROM. Use the following manual instead:

SP 4510SF

1. Manual reference numbers for "-27" models

Paper Manuals

Manual Name	Reference Number
SP 4510SF Read This First	M160-7532
Quick installation Guide SP 4510SF	M160-7534
Initial Guide for FAX SP 4510SF	M160-7537
Notes for Security Guide	D143-7348
SOFTWARE LICENSE AGREEMENT	D645-7901
Attaching the Control Panel Seal	M160-7554
Safety Information	A232-8561A
CE Marking Traceability Information (For EU Countries Only)	B245-6632A
Notes for Using This Machine Safely	D176-7993A
Fusing Roller Cleaning Function	M160-7566

Manual Name	Reference Number
Notes for Users	M160-7572
NOTICE TO USERS	D645-7902

Online Manuals (Website 1)

Manual Name	Reference Number
Getting Started	M160-7863
Easy Search	M160-7864
Paper Specifications and Adding Paper	M160-7865
Maintenance and Specifications	M160-7866
Convenient Functions	M160-7867
Copy/Document Server	M160-7868
Fax	M160-7869
Print	M160-7870
Scan	M160-7871
Troubleshooting	M160-7872
Connecting the Machine/System settings	M160-7873
PostScript 3	M160-7874
VM Card Extended Feature Settings	M160-7875

To see the listed manuals, use the computer's browser to access the following website:

http://support-download.com/services/device/ccmanual/SP4510SF/en/booklist/int/index_book.htm

Online Manuals (Website 2)

Manual Name	Reference Number
SP 4510SF User Guide	M160-7860

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/User.html>

Online Manuals (Website 3)

Manual Name	Reference Number
Operating Instructions Security Guide	M160-7861

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/Security.html>

Online Manuals (Website 4)

Manual Name	Reference Number
Operating Instructions Driver Installation Guide	M160-7876

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/DriverInstall.html>

Online Manuals (Website 5)

Manual Name	Reference Number
About Open Source Software License	M160-7843

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/Oss.html>

Online Manuals (Website 6)

Manual Name	Reference Number
Notes on Security Functions	D146-7587
Notes for Administrators: Using This Machine in a Network Environment Compliant with IEEE Std 2600.2 TM -2009	M160-7573

The URLs of the websites to see the listed manuals are in "Manuals List", SP 4510SF Read This First.

2. Manual reference numbers for "-17" models

Paper Manuals

Manual Name	Reference Number
SP 4510SF Read This First	M160-7533
Quick Installation Guide SP 4510SF	M160-7535A
Initial Guide for FAX SP 4510SF	M160-7538
Notes for Security Guide	D143-7348
Fusing Roller Cleaning Function	M160-7566
Notes for Users	M160-7572
Notes for Using This Machine Safely	D176-7993A
SOFTWARE LICENSE AGREEMENT	D645-7901
RICOH SP 4510SF Monochrome LED MULTIFUNCTION PRINTER LIMITED WARRANTY – FOR U.S. ONLY	M160-8691
NOTICE TO USERS	D645-7902
Technology Support Services Center Second Floor 4667 North Royal Atlanta Drive Tucker, GA 30084-3802	M204-8604
Product Support	M204-8605

Online Manuals (Website 1)

Manual Name	Reference Number
Getting Started	M160-7863
Easy Search	M160-7864
Paper Specifications and Adding Paper	M160-7865
Maintenance and Specifications	M160-7866
Convenient Functions	M160-7867

Manual Name	Reference Number
Copy/Document Server	M160-7868
Fax	M160-7869
Print	M160-7870
Scan	M160-7871
Troubleshooting	M160-7872
Connecting the Machine/System settings	M160-7873
PostScript 3	M160-7874
VM Card Extended Feature Settings	M160-7875

To see the listed manuals, use the computer's browser to access the following website:

http://support-download.com/services/device/ccmanual/SP4510SF/en/booklist/int/index_book.htm

Online Manuals (Website 2)

Manual Name	Reference Number
SP 4510SF User Guide	M160-7860

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/User.html>

Online Manuals (Website 3)

Manual Name	Reference Number
Operating Instructions Security Guide	M160-7861

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/Security.html>

Online Manuals (Website 4)

Manual Name	Reference Number
Operating Instructions Driver Installation Guide	M160-7876

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/DriverInstall.html>

Online Manuals (Website 5)

Manual Name	Reference Number
About Open Source Software License	M160-7843

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/SP4510SF/en/pdf/Oss.html>

Online Manuals (Website 6)

Manual Name	Reference Number
Notes on Security Functions	D146-7587
Notes for Administrators: Using This Machine in a Network Environment Compliant with IEEE Std 2600.2™-2009	M160-7573

The URLs of the websites to see the listed manuals are in "Manuals List", SP 4510SF Read This First.

MP 401SPF**1. Manual reference numbers for "-27" models****Paper Manuals**

Manual Name	Reference Number
MP 401SPF Read This First	M161-7548
Safety Information	A232-8561A
Notes for Security Guide	D143-7348
SOFTWARE LICENSE AGREEMENT	D645-7901

Manual Name	Reference Number
CE Marking Traceability Information (For EU Countries Only)	B245-6632A
Notes for Using This Machine Safely	D176-7993A
Fusing Roller Cleaning Function	M160-7566
NOTICE TO USERS	D645-7902

Online Manuals (Website 1)

Manual Name	Reference Number
Getting Started	M161-7572
Easy Search	M160-7864
Paper Specifications and Adding Paper	M160-7865
Maintenance and Specifications	M161-7573
Convenient Functions	M160-7867
Copy/Document Server	M160-7868
Fax	M160-7869
Print	M160-7870
Scan	M161-7574
Troubleshooting	M161-7575
Connecting the Machine/System settings	M161-7576
PostScript 3	M160-7874
VM Card Extended Feature Settings	M160-7875

To see the listed manuals, use the computer's browser to access the following website:

http://support-download.com/services/device/ccmanual/MP401/en/booklist/int/index_book.htm

Online Manuals (Website 2)

Manual Name	Reference Number
MP 401 SPF User Guide	M161-7570

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/User.html>

Online Manuals (Website 3)

Manual Name	Reference Number
Operating Instructions Security Guide	M160-7861

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/Security.html>

Online Manuals (Website 4)

Manual Name	Reference Number
Operating Instructions Driver Installation Guide	M160-7876

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/DriverInstall.html>

Online Manuals (Website 5)

Manual Name	Reference Number
About Open Source Software License	M160-7843

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/Oss.html>

Online Manuals (Website 6)

Manual Name	Reference Number
Notes on Security Functions	D146-7587

Manual Name	Reference Number
Notes for Administrators: Using This Machine in a Network Environment Compliant with IEEE Std 2600.2™-2009	M160-7573

The URLs of the websites to see the listed manuals are in "Manuals List", MP 401SPF Read This First.

2. Manual reference numbers for "-17" models

Paper Manuals

Manual Name	Reference Number
MP 401SPF Read This First	M161-7549
Notes for Security Guide	D143-7348
SOFTWARE LICENSE AGREEMENT	D645-7901
Notes for Using This Machine Safely	D176-7993A
Fusing Roller Cleaning Function	M160-7566
NOTICE TO USERS	D645-7902

Online Manuals (Website 1)

Manual Name	Reference Number
Getting Started	M161-7572
Easy Search	M160-7864
Paper Specifications and Adding Paper	M160-7865
Maintenance and Specifications	M161-7573
Convenient Functions	M160-7867
Copy/Document Server	M160-7868
Fax	M160-7869
Print	M160-7870
Scan	M161-7574

Manual Name	Reference Number
Troubleshooting	M161-7575
Connecting the Machine/System settings	M161-7576
PostScript 3	M160-7874
VM Card Extended Feature Settings	M160-7875

To see the listed manuals, use the computer's browser to access the following website:

http://support-download.com/services/device/ccmanual/MP401/en/booklist/int/index_book.htm

Online Manuals (Website 2)

Manual Name	Reference Number
MP 401SPF User Guide	M161-7570

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/User.html>

Online Manuals (Website 3)

Manual Name	Reference Number
Operating Instructions Security Guide	M160-7861

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/Security.html>

Online Manuals (Website 4)

Manual Name	Reference Number
Operating Instructions Driver Installation Guide	M160-7876

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/DriverInstall.html>

Online Manuals (Website 5)

Manual Name	Reference Number
About Open Source Software License	M160-7843

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/Oss.html>

Online Manuals (Website 6)

Manual Name	Reference Number
Notes on Security Functions	D146-7587
Notes for Administrators: Using This Machine in a Network Environment Compliant with IEEE Std 2600.2TM-2009	M160-7573

The URLs of the websites to see the listed manuals are in "Manuals List", MP 401 SPF Read This First.

3. Manual reference numbers for "-29" models**Paper Manuals**

Manual Name	Reference Number
MP 401 SPF Read This First	M161-7532
Notes for Security Guide	D143-7348
Notes for Using This Machine Safely	D176-7993A
SOFTWARE LICENSE AGREEMENT	D645-7901
Fusing Roller Cleaning Function	M160-7566
NOTICE TO USERS	D645-7902

Online Manuals (Website 1)

Manual Name	Reference Number
Getting Started	M161-7572
Easy Search	M160-7864
Paper Specifications and Adding Paper	M160-7865

Manual Name	Reference Number
Maintenance and Specifications	M161-7573
Convenient Functions	M160-7867
Copy/Document Server	M160-7868
Fax	M160-7869
Print	M160-7870
Scan	M161-7574
Troubleshooting	M161-7575
Connecting the Machine/System settings	M161-7576
PostScript 3	M160-7874
VM Card Extended Feature Settings	M160-7875

To see the listed manuals, use the computer's browser to access the following website:

http://support-download.com/services/device/ccmanual/MP401/en/booklist/int/index_book.htm

Online Manuals (Website 2)

Manual Name	Reference Number
MP 401SPF User Guide	M161-7570

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/User.html>

Online Manuals (Website 3)

Manual Name	Reference Number
Operating Instructions Security Guide	M160-7861

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/Security.html>

Online Manuals (Website 4)

Manual Name	Reference Number
Operating Instructions Driver Installation Guide	M160-7876

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/DriverInstall.html>

Online Manuals (Website 5)

Manual Name	Reference Number
About Open Source Software License	M160-7843

To see the listed manuals, use the computer's browser to access the following website:

<http://support-download.com/services/device/ccmanual/MP401/en/pdf/Oss.html>

Online Manuals (Website 6)

Manual Name	Reference Number
Notes on Security Functions	D146-7587
Notes for Administrators: Using This Machine in a Network Environment Compliant with IEEE Std 2600.2™-2009	M160-7573

The URLs of the websites to see the listed manuals are in "Manuals List", MP 401SPF Read This First.

Options

CC certification has been obtained for the machine with the following option attached.

- Hard Disk Drive Option Type M6

The following options are not CC-certified, but can still be used with the machine.

- Paper Feed Unit PB1060
- Paper Feed Unit PB1070
- Copy Data Security Unit Type G
- ADF Handle Type B
- Handset HS1010

- Unicode Font Package for SAP® 1 License
- Unicode Font Package for SAP® 10 License
- Unicode Font Package for SAP® 100 License

Preparation for Use

To use the MFP in a CC-certified operating environment, the administrator must perform the procedures described on page 22 "Specifying the MFP Settings" and page 41 "Checking the MFP Settings" in advance.

The administrator should read the MFP manual thoroughly before performing the procedures described on page 22 "Specifying the MFP Settings" and page 41 "Checking the MFP Settings".

Specifying the MFP Settings

This section explains how to specify the MFP settings to establish a CC-certified operating environment.

The administrator must specify the MFP settings using the control panel and Web Image Monitor according to the following procedures.

Before specifying the machine settings, log in as the administrator. For details about logging in, see "Administrator Login Method" in "Getting Started", Security Guide.

★ Important

- When a message prompting you to enter the password at startup appears, specify passwords for the administrator and the supervisor. For details, see "Changing the Administrator's or Supervisor's Password" in "Notes for Using This Machine Safely".

Procedure 1: Settings to Specify Using the Control Panel

Using the control panel, specify [System Settings], [Copier/Document Server Features], [Printer Features], [Scanner Features], [Facsimile Features], and [User Authentication Management] in the User Tools menu so that they are in the CC-certified ranges.

For details about configuring settings in the User Tools menu, see "Accessing User Tools" in "Read This First", Connecting the Machine/System settings.

1. Specifying [System Settings] (1)

The administrator must specify the settings in [System Settings] within the ranges shown in the table on the following page.

For details about how to specify the settings, see "System Settings", Connecting the Machine/System settings.

★ Important

- If you set "User Authentication Management" to [Windows Authentication], as described on page 25 "2. Specifying [User Authentication Management]", do not use the server name

registered in the Windows server for any of "Administrator 1-4" or "Supervisor" in "Program/Change Administrator".

- To change the supervisor's "Login User Name" and "Login Password", log in as the supervisor.

Tab	Item	Settings
Timer Settings	Auto Logout Timer	Select [On], and then set the range for the timer between 60-999 seconds.
Interface Settings	Network ▶ Machine IPv4 Address	<ul style="list-style-type: none"> • Specifying a static IPv4 address Enter the IPv4 address and subnet mask. • Obtaining the DHCP server address automatically Select [Auto-Obtain (DHCP)].
Interface Settings	Network ▶ IPv4 Gateway Address	Enter the IPv4 gateway address.
Interface Settings	Network ▶ DNS Configuration	<p>Specify this only if you are using a static DNS server.</p> <ul style="list-style-type: none"> • Specifying a static DNS server Enter the IPv4 address in "DNS Server 1", "DNS Server 2", and "DNS Server 3". (Specify DNS Server 2 and 3 if required.) • Obtaining the DHCP server address automatically Select [Auto-Obtain (DHCP)].
Interface Settings	Network ▶ Effective Protocol ▶ IPv4	[Active]
Interface Settings	Network ▶ Effective Protocol ▶ IPv6	[Inactive]
Interface Settings	Network ▶ IEEE 802.1X Authentication for Ethernet	[Inactive]

Tab	Item	Settings
Administrator Tools	Administrator Authentication Management ▶ User Management	Select [On], and then select [Administrator Tools] in [Select available settings].
Administrator Tools	Administrator Authentication Management ▶ Machine Management	Select [On], and then select [General Features], [Tray Paper Settings], [Timer Settings], [Interface Settings], [File Transfer], and [Administrator Tools] in [Select available settings].
Administrator Tools	Administrator Authentication Management ▶ Network Management	Select [On], and then select [Interface Settings], [File Transfer], and [Administrator Tools] in [Select available settings].
Administrator Tools	Administrator Authentication Management ▶ File Management	Select [On], and then select [Administrator Tools] in [Select available settings].
Administrator Tools	Program/Change Administrator ▶ Program/Change Administrator ▶ Administrator 1-4	Specify settings for one or more administrators. Specify the administrator's "Login User Name" and "Login Password". Assign all administrator roles (user administrator, machine administrator, network administrator, and file administrator) to a single administrator.
Administrator Tools	Program/Change Administrator ▶ Program/Change Administrator ▶ Supervisor	Change the supervisor's "Login User Name" and "Login Password".
Administrator Tools	Media Slot Use ▶ Store to Memory Device	[Prohibit]

Tab	Item	Settings
Administrator Tools	Media Slot Use ▶ Print from Memory Storage Device	[Prohibit]

2. Specifying [User Authentication Management]

The administrator must specify the settings in [User Authentication Management] in [System Settings] within the ranges shown in the following table.

For details about how to specify the settings, see "System Settings", Connecting the Machine/System settings.

★ Important

- Set [User Authentication Management] to [Basic Authentication] or [Windows Authentication].

1. Specifying [Basic Authentication]

Tab	Item	Settings
Administrator Tools	User Authentication Management	[Basic Authentication]
Administrator Tools	User Authentication Management ▶ Basic Authentication ▶ Authentication Info ▶ Available Other Functions	Specify this in accordance with your operating environment. Do not set this to [Browser].
Administrator Tools	User Authentication Management ▶ Basic Authentication ▶ Authentication Info ▶ Printer Job Authentication	[Entire]

2. Specifying [Windows Authentication]

Tab	Item	Settings
Administrator Tools	Program/Change/Delete Realm ▶ Program/Change	Specify "Realm Name", "KDC Server Name", and "Domain Name".

Tab	Item	Settings
Administrator Tools	User Authentication Management	[Windows Authentication]
Administrator Tools	User Authentication Management ▶ Windows Authentication ▶ Authentication Info ▶ Kerberos Authentication	[On] Select the realm applied to Kerberos authentication.
Administrator Tools	User Authentication Management ▶ Windows Authentication ▶ Authentication Info ▶ Printer Job Authentication	[Entire]
Administrator Tools	User Authentication Management ▶ Windows Authentication ▶ Authentication Info ▶ Use Secure Connection (SSL)	[On]
Administrator Tools	User Authentication Management ▶ Windows Authentication ▶ Program/Change Group ▶ * Default Group ▶ Available Other Functions	Specify settings so that users cannot use all functions. Do not use the global group. You can specify the functions available to each user during or after user registration. However, do not include [Browser] in the functions available to users.

3. Specifying [System Settings] (2)

The administrator must specify the settings in [System Settings] within the ranges shown in the table on the following page.

For details about how to specify the settings, see "System Settings", Connecting the Machine/System settings.

Tab	Item	Settings
Administrator Tools	Extended Security ▶ Restrict Display of User Information	[On]
Administrator Tools	Extended Security ▶ Restrict Adding of User Destinations (Fax)	[On]
Administrator Tools	Extended Security ▶ Restrict Adding of User Destinations (Scanner)	[On]
Administrator Tools	Extended Security ▶ Restrict Use of Destinations (Fax)	[On]
Administrator Tools	Extended Security ▶ Restrict Use of Destinations (Scanner)	[On]
Administrator Tools	Extended Security ▶ Transfer to Fax Receiver	[Prohibit]
Administrator Tools	Extended Security ▶ Authenticate Current Job	[Access Privilege]
Administrator Tools	Extended Security ▶ @Remote Service	Select [Proh. Some Services] if you use @Remote Service. Otherwise, select [Prohibit]. Do not set this to [Do not Prohibit].
Administrator Tools	Extended Security ▶ Update Firmware	[Prohibit]
Administrator Tools	Extended Security ▶ Change Firmware Structure	[Prohibit]

Tab	Item	Settings
Administrator Tools	Extended Security ▶ Password Policy	<p>Set "Complexity Setting" to [Level 1] or [Level 2], press [Change] on the right of "Minimum Character No.", and then set the number of characters to 8 or more.</p> <p>For example, to set the number of characters to 8, press the number key "8", and then "#".</p> <p>Even if you change the password policy, passwords that have already been registered can still be used. The changed password policy will be applied only to passwords specified or changed subsequently.</p>
Administrator Tools	Extended Security ▶ Security Setting for Access Violation	[Off]
Administrator Tools	Auto Delete File in Document Server	Select [On] or [Off].
Administrator Tools	LDAP Search	[Off]
Administrator Tools	Service Mode Lock	[On]
Administrator Tools	Auto Erase Memory Setting	<p>Select [On], and then select [NSA], [DoD], or [Random Numbers].</p> <p>If you set this to [Random Numbers], set [Number of Erase] to three or more.</p>
Administrator Tools	Transfer Log Setting	[Off]
Administrator Tools	Machine Data Encryption Settings	<p>Ensure that the current data has been encrypted.</p> <p>If the data has been encrypted, the following message will appear: "The data in the machine has been encrypted."</p>

4. Specifying [Copier/Document Server Features]

The administrator must specify the settings in [Copier/Doc. Srvr. Featr.] within the ranges shown in the following table.

For details about how to specify the settings, see "Copier/Document Server Features", Copy/Document Server.

Tab	Item	Settings
Administrator Tools	Menu Protect	[Level 2]

5. Specifying [Printer Features]

The administrator must specify the settings in [Printer Features] within the ranges shown in the following table.

For details about how to specify the settings, see "Printer Features", Print.

Tab	Item	Settings
Data Management	Menu Protect	[Level 2]
Data Management	Auto Delete Temporary Print Jobs	Select [On] or [Off].
Data Management	Auto Delete Stored Print Jobs	Select [On] or [Off].
System	Jobs Not Printed As Machn. Was Off	[Do not Print]

6. Specifying [Scanner Features]

The administrator must specify the settings in [Scanner Features] within the ranges shown in the following table.

For details about how to specify the settings, see "Scanner Features", Scan.

Tab	Item	Settings
Initial Settings	Menu Protect	[Level 2]
General Settings	Print & Delete Scanner Journal	[Do not Print: Delete Oldest] or [Do not Print: Disable Send]

7. Specifying [Facsimile Features]

The administrator must specify the settings in [Facsimile Features] within the ranges shown in the following table.

For details about how to specify the settings, see "Facsimile Features", Fax.

Tab	Item	Settings
General Settings	Box Setting	Set all items to [* Not Programmed].
Send Settings	Backup File TX Setting	[Off]
Reception Settings	Reception File Settings ▶ Store	[On]
Reception Settings	Reception File Settings ▶ Forwarding	[Off]
Reception Settings	Reception File Settings ▶ Print	[Off]
Reception Settings	Reception File Settings ▶ Memory Lock Reception	[Off]
Initial Settings	Menu Protect	[Level 2]
Initial Settings	Parameter Setting ▶ switch 40, bit 0	[1] If the memory for stored received faxes become full, the MFP stops receiving new faxes and keeps the stored ones without printing or deleting them.
Initial Settings	Parameter Setting ▶ switch 10, bit 0	[1] Only users who are authorized by the administrator can access, from the control panel, received faxes that are stored.
Initial Settings	Parameter Setting ▶ switch 04, bit 7	[0] If this is enabled, previews will not be included in the reports.
Initial Settings	Internet Fax Setting	[Off]
Initial Settings	Email Setting	[On]

Tab	Item	Settings
Initial Settings	Folder Setting	[On]

Procedure 2: Settings to Specify Using Web Image Monitor

It is necessary to specify the values in [Device Settings], [Printer], [Fax], [Interface], [Network], [Security] and [Webpage] in [Configuration] in [Device Management] of Web Image Monitor within the CC-certified range.

Before specifying system settings, the administrator should refer to the Web Image Monitor help. The CC-certified Web Image Monitor help can be downloaded from the following URL:

<http://support-download.com/services/device/webhlp/nb/gen/v150cc1/en/>

The help that appears when the "?" icon (Help button) in Web Image Monitor's header area is clicked may have changed after receiving CC evaluation.

Before specifying the settings, install the Web browser specified in "CC-Certified Operating Environment" in this manual on the client computer, and then connect the client computer and MFP to the network that can be accessed only by the administrator.

For details about how to launch Web Image Monitor, see "Using Web Image Monitor" in "Monitoring and Configuring the Machine", Connecting the Machine/System settings.

1. Specifying [Device Settings]

The administrator must specify the settings in [Device Settings] within the ranges shown in the following table.

Category	Item	Settings
Device Settings	Date/Time ▶ Time Zone	Set the appropriate time zone. After specifying "Time Zone", be sure to click [OK].
Device Settings	Date/Time ▶ Set Date	Set the appropriate date.
Device Settings	Date/Time ▶ Set Time	Set the appropriate time.
Device Settings	Logs ▶ Collect Job Logs	[Active]

Category	Item	Settings
Device Settings	Logs ▶ Job Log Collect Level	[Level 1]
Device Settings	Logs ▶ Collect Access Logs	[Active]
Device Settings	Logs ▶ Access Log Collect Level	[Level 2]
Device Settings	Logs ▶ Collect Eco-friendly Logs	[Active]
Device Settings	Logs ▶ Eco-friendly Log Collect Level	[Level 2]
Device Settings	Email ▶ Administrator Email Address	Enter the administrator's email address.
Device Settings	Email ▶ SMTP Server Name	Enter the SMTP server name or IP address.

2. Specifying [Printer]

The administrator must specify the settings in [Printer] within the ranges shown in the following table.

Category	Item	Settings
Printer	Basic Settings ▶ Virtual Printer	[Inactive]

3. Specifying [Fax]

The administrator must specify the settings in [Fax] within the ranges shown in the following table.

Category	Item	Settings
Fax	IP-Fax Settings ▶ Enable H.323	[Off]

Category	Item	Settings
Fax	IP-Fax Settings ▶ Enable SIP	[Off]
Fax	Parameter Settings ▶ LAN-Fax Result Report	[Off]

4. Specifying [Interface]

The administrator must specify the settings in [Interface] within the ranges shown in the following table.

Category	Item	Settings
Interface	Interface Settings ▶ USB	[Inactive]

5. Specifying [Network]

The administrator must specify the settings in [Network] within the ranges shown in the following table.

Category	Item	Settings
Network	IPv4 ▶ LLMNR	[Inactive]

6. Specifying [Security]

The administrator must specify the settings in [Security] within the ranges shown in the following table.

★ Important

- If "Network Security" ▶ "Security Level" is set to [FIPS 140], some functions become unavailable. For details about the functions that become unavailable, see "Status of Functions under Each Network Security Level" and "Enabling and Disabling Protocols" in the Security Guide.
- If the FTP or SNMP function is set to [Inactive], some functions become unavailable. For details about the functions that become unavailable, see "Enabling and Disabling Protocols" in the Security Guide.
- For details about how to specify Device Certificate, see "Protecting the Communication Path via a Device Certificate", Security Guide.

- Set "Kerberos Authentication" ▶ "Encryption Algorithm" to the values specified when setting "User Authentication Management" to [Windows Authentication], as described on page 25 "2. Specifying [User Authentication Management]".
- For details about specifying IPsec, see "Configuring IPsec", Security Guide.

Category	Item	Settings
Security	Device Certificate ▶ Certificate 1 ▶ Create	<p>Configure this to create and install the device certificate (self-signed certificate).</p> <p>If you are using a certificate issued by the certificate authority, you do not need to configure this setting.</p> <p>Of the settings for the device certificate (self-signed certificate), set "Algorithm Signature" to one of the following:</p> <ul style="list-style-type: none">• sha512WithRSA-4096• sha512WithRSA-2048• sha256WithRSA-4096• sha256WithRSA-2048• sha1WithRSA-2048• sha1WithRSA-1024

Category	Item	Settings
Security	Device Certificate ▶ Certificate 1 ▶ Request	<p>Configure this to create the request form for the certificate authority to issue the device certificate.</p> <p>If you are using a self-signed device certificate, you do not need to configure this setting.</p> <p>Of the settings for the device certificate (certificate issued by the certificate authority), set "Algorithm Signature" to one of the following:</p> <ul style="list-style-type: none"> • sha512WithRSA-4096 • sha512WithRSA-2048 • sha256WithRSA-4096 • sha256WithRSA-2048 • sha1WithRSA-2048 • sha1WithRSA-1024 <p>Submit the application form to request that the certificate authority issue the device certificate.</p> <p>The request method depends on the certificate authority. For details, contact the certificate authority.</p> <p>You can install the certificate issued by the certificate authority via Web Image Monitor.</p>
Security	Device Certificate ▶ Install	<p>To use the device certificate (issued by the certificate authority), install the certificate by configuring this setting.</p> <p>If using the intermediate certificate as well, install that too.</p>
Security	Device Certificate ▶ Install Intermediate Certificate	<p>When using an intermediate certificate, configure this setting to install the certificate.</p>

Category	Item	Settings
Security	Device Certificate ▶ Certification ▶ S/MIME	Select the installed device certificate.
Security	Device Certificate ▶ Certification ▶ IPsec	Select the installed device certificate.
Security	Network Security ▶ Security Level	[FIPS 140] After setting this to [FIPS 140], be sure to click [OK].
Security	Network Security ▶ TCP/IP ▶ IPv6	[Inactive]
Security	Network Security ▶ HTTP - Port 80 ▶ IPv4	[Close] Doing this will also set "IPv4" to [Close] in "Port 80" in "IPP".
Security	Network Security ▶ SSL/TLS Version	Set "TLS1.2", "TLS1.1", and "TLS1.0" to [Active], and "SSL3.0" to [Inactive].
Security	Network Security ▶ Encryption Strength Setting	Check all boxes for "AES", "3DES", and "RC4".
Security	Network Security ▶ FTP ▶ IPv4	[Inactive]
Security	Network Security ▶ sftp ▶ IPv4	[Inactive]
Security	Network Security ▶ ssh ▶ IPv4	[Inactive]

Category	Item	Settings
Security	Network Security ▶ WSD (Device) ▶ IPv4	[Inactive]
Security	Network Security ▶ WSD (Printer) ▶ IPv4	[Inactive]
Security	Network Security ▶ WSD (Scanner) ▶ IPv4	[Inactive]
Security	Network Security ▶ SNMP	[Inactive]
Security	Network Security ▶ Kerberos Authentication ▶ Encryption Algorithm	Check "AES256-CTS-HMAC-SHA1-96", "AES128-CTS-HMAC-SHA1-96", "DES3-CBC-SHA1", and "RC4-HMAC", and uncheck "DES-CBC-MD5".
Security	S/MIME ▶ Encryption Algorithm	Select [AES-256 bit], [AES-128 bit] or [3DES-168 bit]. When using S/MIME, it is necessary to register the user certificate.
Security	S/MIME ▶ Digest Algorithm	Select [SHA-512 bit], [SHA-384 bit], [SHA-256 bit] or [SHA1].
Security	S/MIME ▶ When Sending Email by Scanner	[Use Signatures]
Security	S/MIME ▶ When Transferring by Fax	[Use Signatures]
Security	S/MIME ▶ When Sending Email by Fax	[Use Signatures]

Category	Item	Settings
Security	S/MIME ▶ When Emailing TX Results by Fax	[Use Signatures]
Security	S/MIME ▶ When Transferring Files Stored in Document Server (Utility)	[Use Signatures]
Security	IPsec ▶ IPsec	Select [Active] or [Inactive]. If you set this to [Inactive], do not use Scan to Folder, and delete Scan to Folder destinations registered in the address book.
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Address Type	[IPv4]
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Local Address	The machine's IP address
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Remote Address	Connected server's IP address
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Security Level	[Authentication and High Level Encryption]
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Authentication Method	Select [PSK] or [Certificate].

Category	Item	Settings
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ PSK Text	If Authentication Method has been set to [PSK], enter a character string. (Make a note of the entered character string, because it will be required when specifying the delivery server setting.)
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Hash Algorithm	Select [SHA1], [SHA256], [SHA384], or [SHA512].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Encryption Algorithm	Select [3DES], [AES-128-CBC], [AES-192-CBC], or [AES-256-CBC].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Diffie-Hellman Group	Select [2] or [14].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Authentication Algorithm	Check [HMAC-SHA1-96], [HMAC-SHA256-128], [HMAC-SHA384-192] and [HMAC-SHA512-256], and uncheck [HMAC-MD5-96].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Encryption Algorithm Permissions	Check [3DES], [AES-128], [AES-192] and [AES-256], and uncheck [Cleartext] and [DES].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ PFS	Select [2] or [14].
Security	User Lockout Policy ▶ Lockout	[Active]

Category	Item	Settings
Security	User Lockout Policy ▶ Number of Attempts before Lockout	1-5
Security	User Lockout Policy ▶ Lockout Release Timer	[Active]
Security	User Lockout Policy ▶ Lock Out User for	1-9999

7. Specifying [Webpage]

The administrator must specify the settings in [Webpage] within the ranges shown in the following table.

Category	Item	Settings
Webpage	Webpage ▶ Web Image Monitor Auto Logout Settings	3-60

Procedure 3: Settings to Specify Using the Control Panel

Using the control panel, specify [System Settings] in the User Tools menu so that they are in the CC-certified ranges.

1. Specifying [System Settings] (1)

The administrator must specify the settings in [System Settings] within the ranges shown in the table on the following page.

For details about how to specify the settings, see "System Settings", Connecting the Machine/System settings.

Tab	Item	Settings
Interface Settings	Network ▶ Effective Protocol ▶ Firmware Update (IPv4)	[Inactive]

Tab	Item	Settings
Interface Settings	Network ▶ Effective Protocol ▶ Firmware Update (IPv6)	[Inactive]

2. Specifying [Facsimile Features]

The administrator must specify the settings in [Facsimile Features] within the ranges shown in the following table.

For details about how to specify the settings, see "Facsimile Features", Fax.

★ Important

- Prior to this, the administrator must register in the address book the users or groups whose access to received faxes stored in the machine's memory is authorized. For details about registering data in the address book, see "Registering Addresses and Users for Facsimile/Scanner Functions", Connecting the Machine/System settings.

Tab	Item	Settings
Reception Settings	Stored Reception File User Setting	[On] After setting this to [On], specify the users or groups that can access stored reception files.

Checking the MFP Settings

After completing the procedure described on page 22 "Specifying the MFP Settings", check the log data and ROM version according to the following procedure.

You can check that the fax unit in use is a genuine product by checking that the entries in the log files and the ROM version match the following:

1. Check that the machine is off.
2. Turn the machine on.
3. Check the details of the log files that were stored in this machine.

Check that the details for "Log Type", "Result", and "Module Name" in the recorded access log are as follows:

Log Type: Firmware: Structure

Result: Succeeded

Module Name: G3

For details about logs, see "Managing Log Files", Security Guide.

4. Log on as the administrator ("admin").

5. Use the following procedure to check the fax parameter settings from the machine's control panel.

1. Press the [User Tools/Counter] key.
2. Press [Facsimile Features].
3. Press [Initial Settings].
4. Press [Parameter Setting: Print List].
5. Press the [Start] key.
6. Check that the following ROM version matches the one shown in the printed list:

[ROM Version]

G3: 03.00.00 (Validation Data: 4788)

6. Log off.

Changing MFP Settings During Operation

Of the settings specified before operation according to the procedure described on page 22 "Specifying the MFP Settings", the following setting can be changed even during operation.

1

1. Changing [System Settings] Using the Control Panel

Tab	Item	Settings
Timer Settings	Auto Logout Timer	Select [On], and then set the range for the timer between 60-999 seconds.
Interface Settings	Network ▶ Machine IPv4 Address	<ul style="list-style-type: none"> Specifying a static IPv4 address Enter the IPv4 address and subnet mask. Obtaining the DHCP server address automatically Select [Auto-Obtain (DHCP)].
Interface Settings	Network ▶ IPv4 Gateway Address	Enter the IPv4 gateway address.
Interface Settings	Network ▶ DNS Configuration	<p>Specify this only if you are using a static DNS server.</p> <ul style="list-style-type: none"> Specifying a static DNS server Enter the IPv4 address in "DNS Server 1", "DNS Server 2", and "DNS Server 3". (Specify DNS Server 2 and 3 if required.) Obtaining the DHCP server address automatically Select [Auto-Obtain (DHCP)].
Administrator Tools	Program/Change Administrator ▶ Program/Change Administrator ▶ Administrator 1-4	<p>Specify settings for one or more administrators.</p> <p>Specify the administrator's "Login User Name" and "Login Password".</p> <p>Assign all administrator roles (user administrator, machine administrator, network administrator, and file administrator) to a single administrator.</p>

Tab	Item	Settings
Administrator Tools	Program/Change Administrator ▶ Program/Change Administrator ▶ Supervisor	Change the supervisor's "Login User Name" and "Login Password".

2. Changing [User Authentication Management] Using the Control Panel

1. Changing [Basic Authentication]

Tab	Item	Settings
Administrator Tools	User Authentication Management ▶ Basic Authentication ▶ Authentication Info ▶ Available Other Functions	Specify this in accordance with your operating environment. Do not set this to [Browser].

2. Changing [Windows Authentication]

Tab	Item	Settings
Administrator Tools	Program/Change/Delete Realm ▶ Program/Change	Specify "Realm Name", "KDC Server Name", and "Domain Name".

3. Changing [System Settings] Using the Control Panel

Tab	Item	Settings
Administrator Tools	Extended Security ▶ @Remote Service	Select [Proh. Some Services] if you use @Remote Service. Otherwise, select [Prohibit]. Do not set this to [Do not Prohibit].

Tab	Item	Settings
Administrator Tools	Extended Security ▶ Password Policy	<p>Set "Complexity Setting" to [Level 1] or [Level 2], press [Change] on the right of "Minimum Character No.", and then set the number of characters to 8 or more.</p> <p>For example, to set the number of characters to 8, press the number key "8", and then "#".</p> <p>Even if you change the password policy, passwords that have already been registered can still be used. The changed password policy will be applied only to passwords specified or changed subsequently.</p>
Administrator Tools	Auto Erase Memory Setting	<p>Select [On], and then select [NSA], [DoD], or [Random Numbers].</p> <p>If you set this to [Random Numbers], set [Number of Erase] to three or more.</p>

4. Changing [Scanner Features] Using the Control Panel

Tab	Item	Settings
General Settings	Print & Delete Scanner Journal	[Do not Print: Delete Oldest] or [Do not Print: Disable Send]

5. Changing [Device Settings] via Web Image Monitor

Category	Item	Settings
Device Settings	Date/Time ▶ Time Zone	<p>Set the appropriate time zone.</p> <p>After specifying "Time Zone", be sure to click [OK].</p>
Device Settings	Date/Time ▶ Set Date	Set the appropriate date.
Device Settings	Date/Time ▶ Set Time	Set the appropriate time.

Category	Item	Settings
Device Settings	Email ▶ Administrator Email Address	Enter the administrator's email address.
Device Settings	Email ▶ SMTP Server Name	Enter the SMTP server name or IP address.

6. Changing [Security] via Web Image Monitor

Category	Item	Settings
Security	Device Certificate ▶ Certificate 1 ▶ Create	<p>Configure this to create and install the device certificate (self-signed certificate).</p> <p>If you are using a certificate issued by the certificate authority, you do not need to configure this setting.</p> <p>Of the settings for the device certificate (self-signed certificate), set "Algorithm Signature" to one of the following:</p> <ul style="list-style-type: none">• sha512WithRSA-4096• sha512WithRSA-2048• sha256WithRSA-4096• sha256WithRSA-2048• sha1WithRSA-2048• sha1WithRSA-1024

Category	Item	Settings
Security	Device Certificate ▶ Certificate 1 ▶ Request	<p>Configure this to create the request form for the certificate authority to issue the device certificate.</p> <p>If you are using a self-signed device certificate, you do not need to configure this setting.</p> <p>Of the settings for the device certificate (certificate issued by the certificate authority), set "Algorithm Signature" to one of the following:</p> <ul style="list-style-type: none"> • sha512WithRSA-4096 • sha512WithRSA-2048 • sha256WithRSA-4096 • sha256WithRSA-2048 • sha1WithRSA-2048 • sha1WithRSA-1024 <p>Submit the application form to request that the certificate authority issue the device certificate.</p> <p>The request method depends on the certificate authority. For details, contact the certificate authority.</p> <p>You can install the certificate issued by the certificate authority via Web Image Monitor.</p>
Security	Device Certificate ▶ Install	<p>To use the device certificate (issued by the certificate authority), install the certificate by configuring this setting.</p> <p>If using the intermediate certificate as well, install that too.</p>
Security	Device Certificate ▶ Install Intermediate Certificate	<p>When using an intermediate certificate, configure this setting to install the certificate.</p>


Category	Item	Settings
Security	Device Certificate ▶ Certification ▶ S/MIME	Select the installed device certificate.
Security	Device Certificate ▶ Certification ▶ IPsec	Select the installed device certificate.
Security	S/MIME ▶ Encryption Algorithm	Select [AES-256 bit], [AES-128 bit] or [3DES-168 bit]. When using S/MIME, it is necessary to register the user certificate.
Security	S/MIME ▶ Digest Algorithm	Select [SHA-512 bit], [SHA-384 bit], [SHA-256 bit] or [SHA1].
Security	IPsec ▶ IPsec	Select [Active] or [Inactive]. If you set this to [Inactive], do not use Scan to Folder, and delete Scan to Folder destinations registered in the address book.
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Local Address	The machine's IP address
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Remote Address	Connected server's IP address
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Authentication Method	Select [PSK] or [Certificate].

Category	Item	Settings
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ PSK Text	If "Authentication Method" has been set to [PSK], enter a character string. (Make a note of the entered character string, because it will be required when specifying the delivery server setting.)
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Hash Algorithm	Select [SHA1], [SHA256], [SHA384], or [SHA512].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Encryption Algorithm	Select [3DES], [AES-128-CBC], [AES-192-CBC], or [AES-256-CBC].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ Diffie-Hellman Group	Select [2] or [14].
Security	IPsec ▶ Encryption Key Auto Exchange Settings ▶ PFS	Select [2] or [14].
Security	User Lockout Policy ▶ Number of Attempts before Lockout	1-5
Security	User Lockout Policy ▶ Lock Out User for	1-9999

7. Changing [Webpage] via Web Image Monitor

Category	Item	Settings
Webpage	Webpage ▶ Web Image Monitor Auto Logout Settings	3-60

Notes for Setting Up and Operation

- Note that regarding display and manual languages, CC certification has been obtained for English only in a network environment compliant with IEEE Std 2600.2TM-2009.
- The CC conformance standard stipulates that you request an authorized service representative to set up a CC-conformant environment.
- Before using the MFP, the encryption key to encrypt the data in the machine must be provided by the service representative or be newly created.
- When using Windows authentication, configure settings to force users to choose passwords that meet the criteria of being at least eight characters long and consisting of at least two of these four types of characters: upper case letters, lower case letters, numbers, and symbols. In addition, apply a lockout setting so that users will be temporarily locked out if they repeatedly enter the wrong password and so fail to log in. The temporary lockout must be set to a minute or longer, and the number of failed logins before lockout occurs must be set to up to five.
- Back up the encryption key only when the machine is not operating.
- For faxing, use the public switched telephone network. IP-Fax and Internet Fax are not CC conformant.
- For print jobs and fax transmissions from the client computer, use IPP-SSL authentication.
- The following message might also be displayed: "SD Card authentication has failed.". If it is, contact your service representative.
- In the event of a hard disk error, the machine displays a message asking whether or not to initialize the disk and initializes it upon receiving approval. Note however that following the hard disk initialization, user authentication might fail even though the correct password has been entered. If this happens, contact your service representative.
- "Encryption", "User Certificate", and "E-mail Address" must be specified by the administrator using Web Image Monitor. For details about installing the user certificate, see "E-mail Encryption", Security Guide.
- To send files by e-mail using the scanner or fax function, install the user certificate when registering a user in the address book and set the encryption setting to [Encrypt All]. When you display addresses to send an e-mail, a  icon appears next to destinations for which [Encrypt All] has been set.
- When using Scan to Folder, make sure IPsec is enabled.

The Scan to Folder destination (FTP or SMB server) must be registered in the address book by the administrator.

When you register the Scan to Folder destination in the address book, click [Change] in "Access Privileges" in "Protect Destination" in "Protection", and then select [Read-only] for users who are allowed to access the Scan to Folder destination.

Configure IPsec for the server selected as the Scan to Folder destination.

- Before receiving faxes, specify "Stored Reception File User Setting" in the Fax setting.
- When you configure "Program Special Sender" in the fax mode, do not specify "Forwarding per Sender" or "Memory Lock RX per Sender" before registering or changing special senders.
- The file creator (owner) has the authority to grant [Full Control] privileges to other users for stored documents in the Document Server. However, administrators should tell users that [Full Control] privileges are meant only for the file creator (owner).
- When using Windows authentication, the user login is case sensitive. You will not be able to use the machine if you make a mistake.
- A third party may steal or read paper documents printed by this machine. Instruct users to collect printed copies immediately.
- Do not access other Web sites when using Web Image Monitor. Also, be sure to logout after you have finished using Web Image Monitor. Instruct users not to access other Web sites when they are using Web Image Monitor, and to be sure to logout when they have finished.
- Obtain log files by downloading them via Web Image Monitor. The administrator is required to properly manage the log information downloaded on the computer, so that unauthorized users may not view, delete, or modify the downloaded log information.
- To prevent incorrect timestamps from being recorded in the audit log, ensure that the External Authentication Server or File Server that connects to the MFP is synchronized with the MFP.
- If the log type attribute of the job log is "Fax: Sending" and the attribute of the log data (Result, Status, Cancelled: Details) is blank, the following status is indicated:

Attributes of the log information	Value
Result	Failed
Status	Failed
Cancelled: Details	Other Error

- Do not use exported or imported device setting information since it is not CC-conformant.
- Do not restore the address book from an SD card, back up to the computer, or restore from the computer since these actions are not CC-conformant.
- Modification of stored file has not been rated for CC conformance.
- When you delete all logs, make sure that the following functions are not being used:
 - Scan file storage
 - Scan file transmission

Trademarks

Microsoft, Windows, Windows Server, Windows Vista, and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

The proper names of the Windows operating systems are as follows:

- The product names of Windows Vista are as follows:
 - Microsoft® Windows Vista® Ultimate
 - Microsoft® Windows Vista® Business
 - Microsoft® Windows Vista® Home Premium
 - Microsoft® Windows Vista® Home Basic
 - Microsoft® Windows Vista® Enterprise
- The product names of Windows 7 are as follows:
 - Microsoft® Windows® 7 Home Premium
 - Microsoft® Windows® 7 Professional
 - Microsoft® Windows® 7 Ultimate
 - Microsoft® Windows® 7 Enterprise
- The product names of Windows Server 2008 are as follows:
 - Microsoft® Windows Server® 2008 Standard
 - Microsoft® Windows Server® 2008 Enterprise
- The product names of Windows Server 2008 R2 are as follows:
 - Microsoft® Windows Server® 2008 R2 Standard
 - Microsoft® Windows Server® 2008 R2 Enterprise
- The product names of Windows Server 2012 are as follows:
 - Microsoft® Windows Server® 2012 Foundation
 - Microsoft® Windows Server® 2012 Essentials
 - Microsoft® Windows Server® 2012 Standard
 - Microsoft® Windows Server® 2012 Datacenter
- The proper names of Internet Explorer 7, 8, 9 and 10 are as follows:
 - Windows® Internet Explorer® 7
 - Windows® Internet Explorer® 8
 - Windows® Internet Explorer® 9
 - Internet Explorer® 10

Other product names used herein are for identification purposes only and might be trademarks of their respective companies. We disclaim any and all rights to those marks.

