

# Notes for Users

---

This supplement provides notes and corrections for the manuals provided with this machine. Read this supplement in conjunction with the relevant manual.

## Note

---

### ■ About the “Bluetooth Interface Unit Type 3245 (optional)”

The Bluetooth interface unit (optional) will be available from 2011.

Information about this option is subject to change. For the latest information, refer to the documentation provided when you purchase the Bluetooth option.

---


## Correction

---

### Section:

"Machine Environment" in 7. Remarks in *Operating Instructions About This Machine*

#### Access to the machine

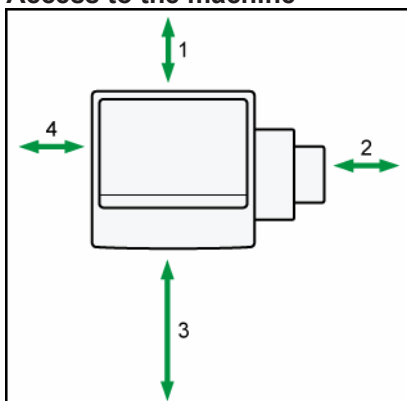

1. Rear: 10 cm (4 inches) or more

2. Right: 10 cm (4 inches) or more

3. Front: 75 cm (29.5 inches) or more

4. Left: 10 cm (4 inches) or more

### Section:

"Specifications for Lower Paper Trays (Optional)" in 8. Appendix in *Operating Instructions About This Machine*

and

"Specifications for Tray 3 (LCT) (Optional)" in 8. Appendix in *Operating Instructions About This Machine*

#### Dimensions (W×D×H)

Error:

580 × 620 × 260 mm (22.9 × 24.5 × 10.3 inches)

580 × 620 × 260 mm (22.9 × 24.4 × 10.3 inches)

Correction:

668 × 766 × 260 mm (26.3 × 30.2 × 10.3 inches)

---

---

**Section:**

"Document Server" in 8. Appendix in *Operating Instructions About This Machine*

**Maximum number of stored documents**

Error:

The maximum number of received faxes that can be stored is 800.

**Correction:**

The maximum number of received faxes that can be stored is 400.

---

**Section:**

"Specifications for the Main Unit" in 8. Appendix in *Operating Instructions About This Machine*

**Warm-up time**

- **Type 1 and 2**

Error: 23 seconds or less

**Correction:** 23 seconds

- **Type 3**

Error: 22 seconds or less

**Correction:** 22 seconds

- **Type 4**

Error: 36 seconds or less

**Correction:** 36 seconds

---

**Section:**

"Specifications for the Main Unit" in 8. Appendix in *Operating Instructions About This Machine*

**Non-reproduction area (Copier):**

Error:

Trailing edge: 0.5 - 6.0 mm (0.02 - 0.24 inches)

**Correction:**

Trailing edge: 0.5 - 6.0 mm (0.02 - 0.24 inches)

(3.0 - 6.0 mm (0.12 - 0.24 inches) in Duplex mode)

---

**Section:**

"Specifications for the Main Unit" in 8. Appendix in *Operating Instructions About This Machine*

**First copy/print time:**

- **Type 1 and 2**

Error:

- Full Color: 7.8 seconds or less

- B&W: 5.0 seconds or less

**Correction:**

- Full Color: 7.8 seconds

- B&W: 4.9 seconds

- **Type 3**

Error:

- Full Color: 6.2 seconds or less

- B&W: 3.9 seconds or less

**Correction:**

- Full Color: 5.9 seconds

- B&W: 3.7 seconds

- **Type 4**

Error:

- Full Color: 5.2 seconds or less

- B&W: 3.2 seconds or less

**Correction:**

- Full Color: 5.0 seconds

- B&W: 3.1 seconds


---

---

## Section:

"Missing Image Area" in 1. Placing Originals in *Operating Instructions Copy and Document Server Reference*

## Missing Image Area

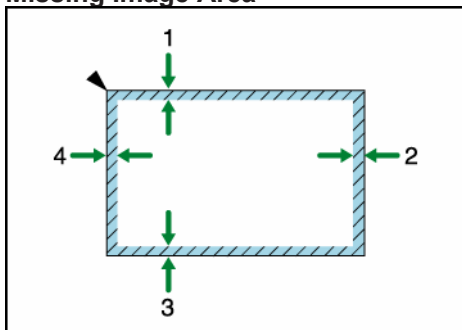

BZH047

1. 0.5 - 4.0 mm (0.02 - 0.15 inch)

2. **0.5 - 6.0 mm (0.02 - 0.24 inch) (3.0 - 6.0 mm (0.12 - 0.24 inches) in Duplex mode)**

3. 0.5 - 4.0 mm (0.02 - 0.15 inch)

4.  $4.2 \pm 1.5$  mm ( $0.17 \pm 0.06$  inch)

---

© 2010

Printed in China

EN

US

AU

D088-7608



D0887608