







Setup Guide

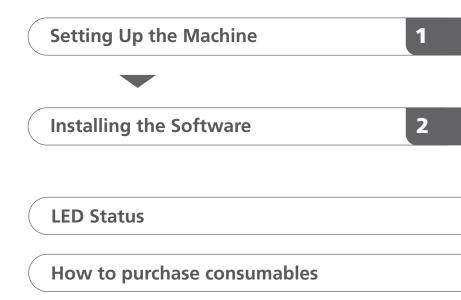


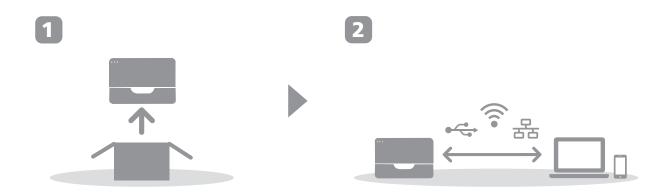

1. Setting Up the Machine

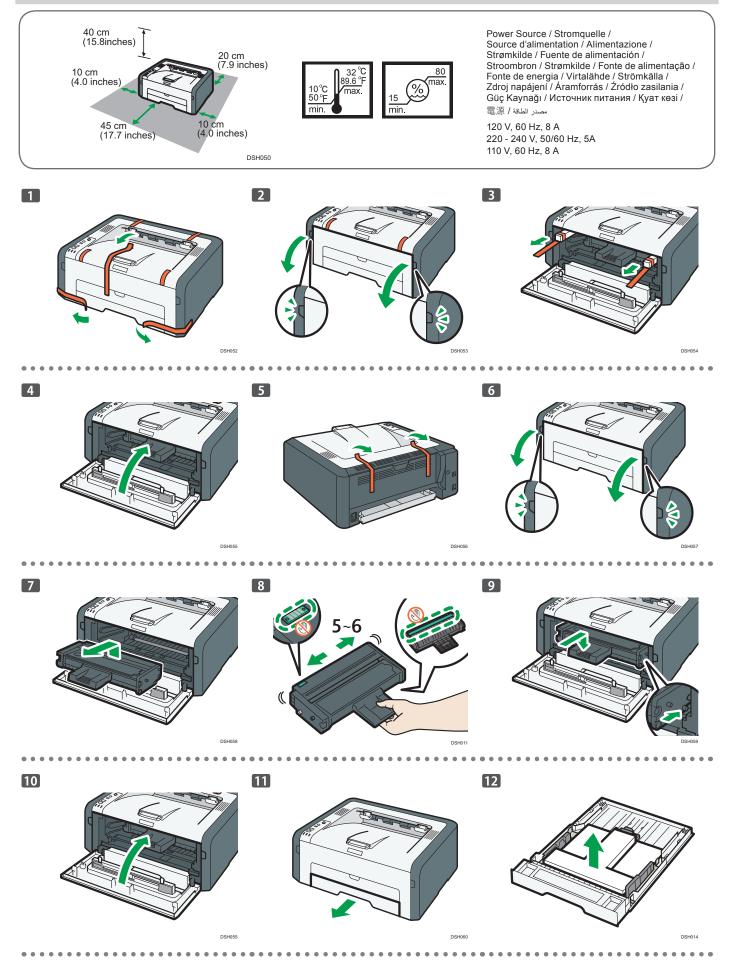

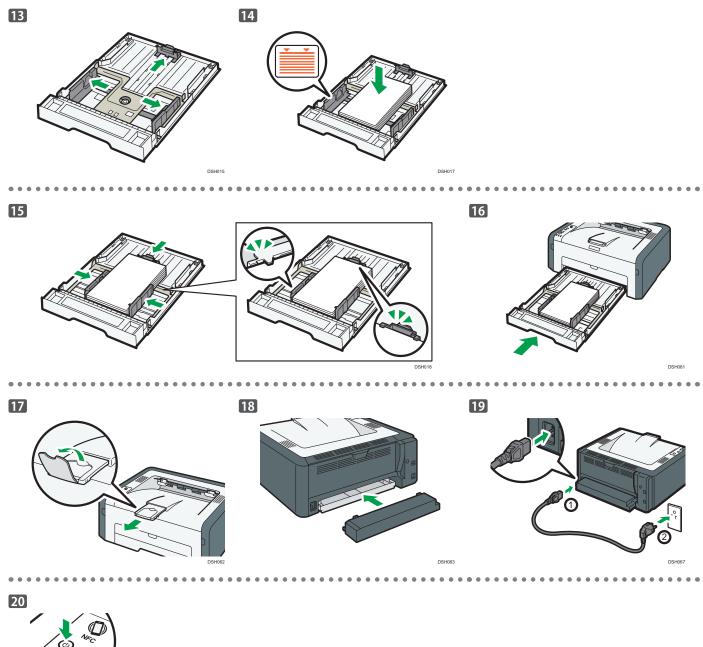






Go to page 3 "Installing the Software". For OS X, see User's Guide in the provided CD-ROM or our website (http://www.ricoh.com/printers/sp200/support/gateway/).

2. Installing the Software

Check how the computer is connected

Specify how to connect to your computer according to the communication environment of your system.

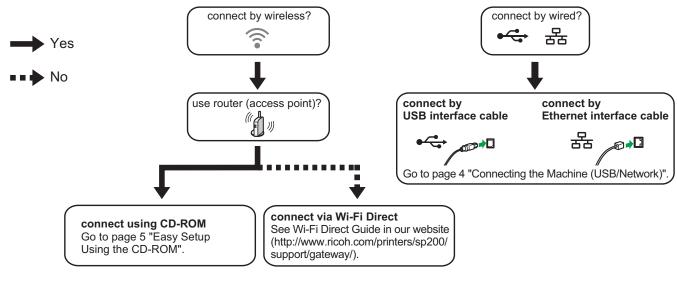

DSH084

- To connect using the WPS button, go to page 6 "Easy Setup Using the WPS Button".
- To connect using a PIN code, go to page 7 "Easy Setup Using a PIN Code".
- To set up manually, see User's Guide in the provided CD-ROM or our website (http://www.ricoh.com/printers/sp200/support/gateway/).
- When the Wi-Fi Direct function is enabled, a Wi-Fi Direct compliant device is recognized as a router (access point), and direct communication among Wi-Fi Direct-compliant devices becomes possible.

When communicating using the Wi-Fi Direct function, you cannot connect to the Internet at the same time.

Use the machine from a smart device Android [105



How to use the machine from a smart device


For information about using the machine from a smart device, see the following website or scan the following QR code from your smart device.





■ How to use the NFC tag (Android smart devices only) When using Android smart devices, download and install the RICOH SP 200 series SOM from the following website or QR code, and then touch the NFC tag on the machine with the device.

Connecting the Machine (USB/Network)



Note

The following items are necessary to set up a wired connection.

- USB interface cable or Ethernet interface cable
- CD-ROM supplied with the machine

1. Turn on your computer..

2. Insert the provided CD-ROM into the CD-ROM drive of the computer.

If your computer does not have a CD-ROM drive, download a setup file from our website (http://www.ricoh.com/printers/sp200/ support/gateway/).




3. Click [Quick Install].



4. The software license agreement appears in the [Software License Agreement] dialog box. After reading the agreement, click [Yes].





5. Select [USB Connection] or [Network Connection] according to communication environment or your device.



- 6. Follow the instructions in the setup wizard.
- 7. Click [Finish] in the [Setup Complete] dialog box. If the installer prompt you to restart Windows, reboot your computer.



Setup is completed.



Easy Setup Using the CD-ROM

Vote

The following items are necessary to set up a wireless connection.

- USB interface cable or Ethernet interface cable
- Router (access point)
- CD-ROM supplied with the machine

1. Turn on your computer.

2. Insert the provided CD-ROM into the CD-ROM drive of the computer.

If your computer does not have a CD-ROM drive, download a setup file from our website (http://www.ricoh.com/printers/sp200/ support/gateway/).



3. Click [Quick Install].



4. The software license agreement appears in the [Software License Agreement] dialog box. After reading the agreement, click [Yes].



5. Select [Wireless Connection].

Select Connection Type			
Please select how your printer is connected.			
C USB Connection			
Network Connection			
Wireless Connection			
stalShield	< Back Ne	xt> Ca	ncel


- 6. Follow the instructions in the setup wizard.
- 7. Click [Finish] in the [Setup Complete] dialog box. If the installer prompt you to restart Windows, reboot your computer.



Setup is completed.

\neg	То	¢
	Se	t

To connect using the WPS button, go to page 6 "Easy Setup Using the WPS Button".





Easy Setup Using the WPS Button

🔁 Important


- Before doing the following procedure, install the printer driver according to the procedure on page 4 "Connecting the Machine (USB/Network)".
- Make sure the Ethernet cable is not connected to the machine.
- In Steps 10 to 11, configure each setting within two minutes.

Note

The following item is necessary to set up a wireless connection.

- Router (access point)
- 1. Check that the router (access point) is working correctly.
- 2. On the [Start] menu in your computer, point to [All Programs], click [SP 220 Series Software Utilities], and then click [Smart Organizing Monitor for SP 220 Series].

3. Click [User Tools] tab.



4. Click [Printer Configuration].



5. Enter the access code, and then click [OK]. The default access code is "Admin".



6. On the [Network 1] tab, select [Active] for [Wireless Function:].



- Click [Apply], and then click [OK]. The machine restarts.
- 8. Repeat steps 3 to 5 to open the [Printer Configuration] screen.

9. On the [Wireless] tab, select [Setup with WPS] for [Configuration Method].

Wireless LAN Status Wireless Status	Wireless LAN Setting SSID
Not Configured	
MAC Address	Communication Mode
00:1C:7B:E1:08:8C	Infrastructure
Communication Mode	Authentication Encryption
Infrastructure	Open System None
SSID	WPA Passphrase
	WEP Key Length 64 bit w WEP Transmit Key ID #1
Channel	WEP Key Format Hexadecimal *
1	
Indication of Wireless Signal Strength	WEP Key
0% Unavailable	- One-Touch Connection Setting (WPS)-
	Wi-Fi Protected Setup with Push Button
Configuration Method	C WiFi Protected Setup with PIN Code
Manual Setup	PIN Code Get PIN Co
C Setup with WPS / Conne	st

10. Click [Connect].

Wreless LAN Status Wireless Status	Wireless LAN Setting SSID
Not Configured	
MAC Address	Communication Mode
00:1C:78:E1:08:8C	Infrastructure 🗸
Communication Mode	Authentication Encyption
Infrastructure	Open System v None v
SSID	WPA Passphrase
	WEP Key Length 64 bt w WEP Transmit Key ID #1
Channel	WEP Key Format Hexadecimal 💌
Indication of Wireless Signal Strength	WEP Key
0% Unavailable	One-Touch Connection Setting (WPS)
Configuration Method	Wi-Ri Protected Setup with Push Button Wi-Ri Protected Setup with PIN Code
Manual Setup Setup with WPS Connect	PIN Code Get PIN Code

11. Press the WPS button on the router (access point) within two minutes.



For details about how to use the WPS button, refer to the manuals for the router (access point).

12. Check the result.

Connection has succeeded:

The Power indicator lights up.

Connection has failed:

- All the indicators start to flash simultaneously, and after 30 seconds, only the Power indicator lights up. Try the connection again.
- 13. Configuring the Wi-Fi settings is complete.

Easy Setup Using a PIN Code

🔁 Important

- Before doing the following procedure, install the printer driver according to the procedure on page 4 "Connecting the Machine (USB/Network)".
- Make sure the Ethernet cable is not connected to the machine.
- In Steps 12 to 15, configure each setting within two minutes.


Note

- To establish a connection using the PIN code, use a computer that is connected to the router (access point).
- The following item is necessary to set up a wireless connection.
 - Router (access point)
- 1. Check that the router (access point) is working correctly.
- 2. Open the PIN code configuration window (web page) for the router (access point) on your computer.




3. On the [Start] menu in your computer, point to [All Programs], click [SP 220 Series Software Utilities], and then click [Smart Organizing Monitor for SP 220 Series].

4. Click [User Tools] tab.




5. Click [Printer Configuration].



6. Enter the access code, and then click [OK]. The default access code is "Admin".

Access Code	
Enter Access Code.	
Access Code:	
	OK Cancel

7. On the [Network 1] tab, select [Active] for [Wireless Function:].



- 8. Click [Apply], and then click [OK]. The machine restarts.
- 9. Repeat steps 4 to 6 to open the [Printer Configuration] screen.
- 10. On the [Wireless] tab, select [Setup with WPS] for [Configuration Method].

Wreless LAN Status Wireless Status	Wreless LAN Setting SSID
Not Configured	
MAC Address	Communication Mode
00:1C:7B:E1:08:8C	Infrastructure 💌
Communication Mode	Authentication Encryption
Infrastructure	Open System None
SSID	WPA Passphrase
	WEP Key Length 64 bit WEP Transmit Key ID #1
Channel	WEP Key Format Hexadecimal +
1	WEP Key
Indication of Wireless Signal Strength	WEFINBY
0% Unavailable	One-Touch Connection Setting (WPS)
Configuration Method	WiFi Protected Setup with Push Button
Manual Setup	C WiFi Protected Setup with PIN Code
C Setup with WPS / Connect	PIN Code Get PIN Code

11. Select [Wi-Fi Protected Setup with PIN Code] for [One-Touch Connection Setting (WPS)].

Wireless LAN Status Wireless Status	Witeless LAN Setting- SSID
Not Configured MAC Address	Communication Mode
00:1C:7B:E1:08:8C	Infrastructure -
Communication Mode	Authentication Encryption
Infrastructure	Open System v None v
SSID	WPA Passphrase
	WEP Key Length 64 bit WEP Transmit Key ID #1
Channel	WEP Key Format Hexadecimal *
1	WEP Key
Indication of Wireless Signal Strength	WEF May
0% Unavailable	One-Touch Connection Setting (WPS)
Configuration Method	Wi-R Protected Setup with Push Button Wi-R Protected Setup with PIN Code PIN Code Get PIN Code Get PIN Code


12. Click [Get PIN Code] and check the PIN code. Write down the PIN code in case you might forget it.

Wreless LAN Status Wireless Status	Wireless LAN Setting SSID
Not Configured	
MAC Address	Communication Mode
00:1C:78:E1:08:8C	Infrastructure
Communication Mode	Authentication Encryption
Infrastructure	Open System v None v
SSID	WPA Passphrase
	WEP Key Length 64 bt VEP Transmit Key ID #1
Channel	WEP Key Format Hexadecimal
1	WEP Key
Indication of Wireless Signal Strength	WEP NBy
0% Unavailable	One-Touch Connection Setting (WPS)
Configuration Method	C Wi-R Protected Setup with Push Button C Wi-R Protected Setup with DIM Code
Setup with WPS Connect	PIN Code Get PIN Code

13. Enter the machine's PIN code (8 digits) on the router (access point)'s web page.(The web page accessed in Step 2)



14. Execute WPS (PIN system) from the router (access point)'s web page.



15. Click [Connect].

Wireless LAN Status Wireless Status	Wireless LAN Setting SSID
Not Configured	
MAC Address	Communication Mode
00:1C:7B:E1:08:8C	Authentication Encyclion
Communication Mode	
Infrastructure	Open System v None v
SSID	WPA Passphrase
	WEP Key Length 64 bit WEP Transmit Key ID #1
Channel	WEP Key Format Hexadecimal *
1	WEPKey
Indication of Wireless Signal Strength	1.00 (10)
0% Unavailable	- One-Touch Connection Setting (WPS)
Configuration Method	C Wi-Fi Protected Setup with Push Button Wi-Fi Protected Setup with PIN Code
C Manual Setup	PIN Code 22274847 Get PIN Code

16. Check the result.

Connection has succeeded:

The Power indicator lights up.

Connection has failed:

All the indicators start to flash simultaneously, and after 30 seconds, only the Power indicator lights up. Try the connection again.

17. Configuring the Wi-Fi settings is complete.

LED Status

• : On

*: Flashing (on for one second and off for one second)

	LED		Status	Solution	
Power	Alarm	Toner / Paper End	1		
	-	-	The power is on.	The status is normal.	
	-	-	Importing data.	The status is normal.	
•	-	*	The print cartridge is almost empty.	Replace the print cartridge before it becomes empty.	
•	-	•	 The print cartridge is empty. The print cartridge is not set correctly. The tray has run out of paper. 	 Replace the print cartridge. Set the print cartridge again correctly. Load paper into the tray. 	
•	:•:	-	A paper jam has occurred in the machine.	Use Web Image Monitor or Smart Organizing Monitor to determine where the paper jam is, and then remove the jammed paper.	
•	•	-	 The size of paper to print on and the size of the paper loaded in the tray do not match. A cover is open. 	 Use Web Image Monitor or Smart Organizing Monitor to check the paper size settings, and then change either the size of paper to print on or the size of paper loaded in the tray. Confirm that all the covers are closed completely. 	
•	•	-	Another type of error has occurred.	Use Web Image Monitor or Smart Organizing Monitor to check the error, and then take appropriate measures.	
•			A malfunction has occurred.	Contact your sales or service representative.	

For details, see "Error and Status Indicate on the Control Panel", User's Guide.

How to purchase the consumables

For information about consumables, see the following website or scan the following QR code from your smart device.



http://www.ricoh.com/printers/ sp200/support/gateway/



Trademark

Android is a trademark of Google Inc.

IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Wi-Fi, Wi-Fi Direct, Wi-Fi Protected Setup, WPA, Wi-Fi Protected Access, WPA2, and Wi-Fi Protected Access 2 are registered trademarks of Wi-Fi Alliance.

Linux is a registered trademark of Linus Torvalds in the United States and other countries.

Mac OS is a trademarks or registered trademarks of Apple Inc., in the United States and other countries.

Microsoft[®], Windows[®], Windows Server[®] and Windows Vista[®] are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries/regions.

Red Hat and Red Hat Enterprise Linux are trademarks of Red Hat, Inc., registered in the United States and other countries.

SUSE is a registered trademark of SUSE Linux AG.

SUSE and openSUSE are registered trademarks of Novell, Inc.


Ubuntu and Canonical are registered trademarks of Canonical Ltd.

Other product names used in this manual are for identification purposes only and may be trademarks of their respective companies.

We do not have any or all rights to these marks.

All Microsoft product screenshots are reprinted with permission from the Microsoft Corporation.





) M0A4-8602

EN GB