


# FAX1900L

# **Operator's Manual**

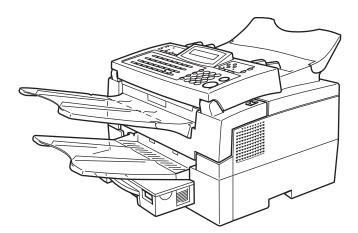

ZAXH010E

Read this manual carefully before you use this product and keep it handy for future reference.

For safety, please follow the instructions in this manual.



Ricoh shall not be responsible for any damage or expense that may result from the use of parts other than recommended parts.

For good copy quality, Ricoh recommends that you use genuine Ricoh toner.

#### TONER CASSETTES

**RICOH FAX TONER CASSETTE TYPE 1430 BLACK** is recommended for the best performance.

## **Overseas Affiliates**

#### U.S.A.

RICOH CORPORATION 5 Dedrick Place West Caldwell, New Jersey 07006 Phone: +1-973-882-2000

#### The Netherlands

RICOH EUROPE B.V. Groenelaan 3, 1186 AA, Amstelveen Phone: +31-(0)20-5474111

#### United Kingdom

RICOH UK LTD. Ricoh House, 1 Plane Tree Crescent, Feltham, Middlesex, TW13 7HG Phone: +44-(0)181-261-4000

#### Germany

RICOH DEUTSCHLAND GmbH Mergenthalerallee 38-40, 65760 Eschborn Phone: +49-(0)6196-9060

#### France

RICOH FRANCE S.A. 383, Avenue du Général de Gaulle BP 307-92143 Clamart Cedex Phone: +33-(0)1-40-94-38-38

#### Spain

RICOH ESPAÑA S.A. Avda. Litoral Mar, 12-14, 08005 Barcelona Phone: +34-(0)93-295-7600

#### Italy

RICOH ITALIA SpA Via della Metallurgia 12, 37139 Verona Phone: +39-(0)45-8181500

#### Hong Kong

RICOH HONG KONG LTD. 23/F., China Overseas Building, 139, Hennessy Road, Wan Chai, Hong Kong Phone: +852-2862-2888

#### Singapore

RICOH ASIA PACIFIC PTE.LTD. 260 Orchard Road, #15-01/02 The Heeren, Singapore 238855 Phone: +65-830-5888 **Optional Equipment** 

### ✤ FAX EXPANSION CARD TYPE 10

A 1-Mbyte memory card can be added.

# CE

Declaration of Conformity

"The Product complies with the requirements of the EMC Directive 89/336/EEC and the Low Voltage Directive 73/23/EEC."

#### FAX EXPANSION CARD TYPE 10

A 1-Mbyte memory card can be added.

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses.

It should not therefore be construed as guaranteeing specific properties of the products described or their suitability for particular applications.

Any existing industrial property rights must be observed. The quality of our products is guaranteed under our General Conditions of Sale.

# Notice

## A CAUTION:

Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Shielded interconnect cables must be employed with this equipment to ensure compliance with the pertinent RF emission limits governing this device.

Although this equipment can use either loop disconnect or DTMF signalling, only the performance of the DTMF signalling is subject to regulatory requirements for correct operation. It is therefore strongly recommended that the equipment is set to use DTMF signalling for access to public or private emergency services. DTMF signalling also provides faster call set up.

Direct (or indirect reflected eye contact with the laser beam may cause serious eye damage. Safety precautions and interlock mechanisms have been designed to prevent any possible laser beam exposure to the operator.

# 🖉 Note

- □ Some illustrations may be slightly different from your machine.
- □ Certain options may not be available in some countries. For details, please contact your local dealer.


In accordance with IEC 60417, this machine uses the following symbols for the main power switch:

- | means POWER ON.
- O means POWER OFF.

### Warning:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

# **Examples Of Indications**

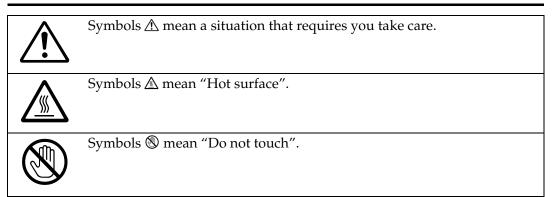

# **ENERGY STAR Program**

ENERGY STAR®



As an ENERGY STAR Partner, we have determined that this machine model meets the ENERGY STAR Guidelines for energy efficiency

The ENERGY STAR Guidelines intend to establish an international energy-saving system for developing and introducing energy-efficient office equipment to deal with environmental issues, such as global warming. This product was designed to reduce the environmental impact associated with fax equipment by means of energy-saving features, such as Energy Saving Standby mode.

This fax automatically lowers its power consumption 5 minute after the last operation has been completed by default. To exit low power mode, press the **[Energy Saver]** key. The fax starts printing in about 40 seconds in the Energy Saving Standby mode or in about 30 seconds in the Fax Standby Mode. Please see the applicable page for details. ( $\Rightarrow$  P.66)

Specification

Energy Saving Stand	lby Mode	Fax Standby Mode	
Power consump- tion	2W	Power consump- tion	25W
Default Time	5 minutes	Default Time	5 minutes
Print Start Time	Within about 40 seconds	Print Start Time	Within about 30 seconds

#### **Recycled paper**

Please contact your sales or service representative for recommended recycled paper types that may be used in this machine.

# TABLE OF CONTENTS

# 1.Safety

Important Safety Instructions	1
When to Call Your Service Representative	3
Power And Grounding	4
Power Supply	
Grounding	4
Other Important Informations	5
General	
Cold Weather Power-up	
Thunderstorms	
Operating Precautions	5
Copy Paper	6
Symbols & Conventions Used In This Manual	6

# 2. Machine Layout

Part Names	7
Operation Panel	9

# 3. Faxing

Recommended Types Of Document Correct Size For The Document Delivery Tray Page Condition	11
Memory Transmission And Immediate Transmission Memory Transmission (Memory Indicator Lit) Immediate Transmission Dialing with the Telephone Directory	13 15 16
Receiving Telephone Calls & Fax Messages (Faxes/Phone Calls) Switching Between Auto, Fax and Telephone Mode Receiving the Fax Message in the Telephone Mode Setting the Auto Ring Time	17 17
Printing Received Messages That Have Been Stored (Substitute Reception)	19
Faxing A Page With Very Fine Detail Resolution & Shading	
Optional Features For Transmission Sending At A Specific Time (Send Later) Printing The Page Number (Page Count) Sending Your Identification At The Top Of Your Message (TTI) Personal Codes	21 21 22
Redialing	24

Automatic Redialing Using the AI Redial key	
Storing & Editing Fax Numbers (Functions 31 & 32) Storing, Editing & Erasing Quick Dial Numbers (Function31) Storing, Editing & Erasing Speed Dial Numbers (Function 32)	25
Storing & Editing A Group Of Fax Numbers (Function 33) Erasing Groups Programming The Group Key	29
Dial Options	31
Programming The Dial Option Key Using the Dial Options	
Chain Dialing	33
Chain Dialing	33
Erasing A Stored Message Before It Is Sent (Functions 21 & 22)	
-	34
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51)	34 35
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51) Confidential Reception	34 35 36
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51)	<b>34</b> <b>35</b> <b>36</b> 36
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51) Confidential Reception	<b>34</b> <b>35</b> <b>36</b> 37
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51) Confidential Reception Storing & Editing the Confidential ID Printing messages Received into Memory (Function 52) Sending A Fax Using The External Telephone	<b>34</b> <b>35</b> <b>36</b> 37 <b>38</b>
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51) Confidential Reception Storing & Editing the Confidential ID Printing messages Received into Memory (Function 52)	<ul> <li>34</li> <li>35</li> <li>36</li> <li>37</li> <li>38</li> <li>39</li> </ul>
Erasing A Stored Message Before It Is Sent (Functions 21 & 22) Printing A Stored Message (Function 51) Confidential Reception Storing & Editing the Confidential ID Printing messages Received into Memory (Function 52) Sending A Fax Using The External Telephone Answering The Telephone	<ul> <li>34</li> <li>35</li> <li>36</li> <li>37</li> <li>38</li> <li>39</li> <li>39</li> </ul>

# 4. Other Features

Verifying Communications, Errors, Counters, Etc Automatically printed reports	41
Report formats Counters (function 94)	
Programming Keystrokes	44
Storing a keystroke program	
Labeling a program	
Erasing a program / Changing the program Label	46
Programming the personal codes	47
Storing a personal code	48
Editing or erasing a personal code	50
Tonal Signals	51
-	
Rejecting messages from senders who don't identify themselves	52
Rejecting or accepting messages from specified senders	
(Authorized Reception)	53
About Authorized Reception	53

Entering A List Of Senders To Treat Differently (Function 81) Switching authorized reception on / off (Function 62)	
Entering A List Of Senders To Treat Differently (Function 81) Programming the list of senders (Special Senders) Editing the RTI/CSI for the special terminals Erasing the special terminal	54 55
Forwarding Programming the forwarding feature Editing the forwarding feature Switching forwarding on / off (Function 62) Selecting which messages to forward Switching local printing on / off Enabling and disabling the forwarding mark	57 58 60 60 61
Wild Cards	
Receiving Options	63
Reports You Can Printout Yourself Journal (Function 41) File list (Function 42) Telephone number list (Function 43) Program List (Function 44 )	64 64 64
Saving Energy How to start the saving energy mode How to exit the saving energy mode Which saving energy mode is best for you?	66 66
Saving Energy With The Power Saving Timer Setting the Power Saving time (Function 71) Switching the Power Saving Timer on / off (Function 62)	68
Copying	
Calling To Request A Message (Polling) Picking up messages stored elsewhere (polling reception) Operating procedure Entering a Personal Code	71 71
User Function Keys	73
Programming a User Function Code Using a Function Program Editing a Function Program Deleting a Function Program	73
Dual Access	75

# 5. Maintaining Your Machine

Loading Paper In The Main Cassette	77
Replacing The Toner Cassette And Cleaning Pad	80

Toner Cassette	84
Cleaning The Rollers And Scanner	85
Changing The Paper Size In The Paper Cassette	86
Changing The Paper Size Setting	91

# 6. Troubleshooting

If An Indicator Lights Up On The Operation Panel	93
Other Possible Problems	94
You Want To Remove The Document In The Feeder	94
Clearing a Document Jam	95
Clearing a Copy, Fax, or Print Jam	96
Clear a Jam inside the machine	
Clear a Jam in the Cassette Entrance	
Clear a Jam in the Upper Rear Unit	99
If Messages You Receive Don't Fit On Your Paper Breaking Down Large Format Messages Length Reduction	
Communication Problems	102
Adjusting the Printing Margins (Function 95)	103
Operating Difficulties	104
Displayed Error Messages	109
Calling The Service Station	111
Sending A Service Report	

# 7. Technical Reference

Access Code For Functions 61 To 95	113
User Parameters User Parameter Hints	
Adjusting The Volume Of Various Features (Function 92)	119
Selecting The Display's Language (Function 93)	121
Entering Characters Entering Symbols Entering Numbers	122
Document & Paper Specifications Documents (Using The Auto Document Feeder) Document Feeder Requirements Paper Requirements	123
Capabilities	124

File Storage	124
Specifications	125
Base Machine	

# 8. Installation

Before Installation	127
Machine Environment	
Location	
Ventilation Grill Direction	129
Installing The Optional Memory Card	130
Connecting The External Telephone	131
Connecting The Machine	132
Connecting Up To The Telephone Line	133
Connecting The Power And Switching On	134
Initial Settings & Adjustments	135
Initial Settings (Function 61)	135
Setting The Access Number	
Setting The Phone Line (Function 62)	
Setting The Date & Time (Function 91)	
Summer Time / Daylight Saving Time (Function 62)	138

# 9. Function List

Function List	
10.Laser Label	
Position of the Laser Label	143
11.BABT Notice	
BABT Notice	145
INDEX	148

# 1. Safety

# **Important Safety Instructions**

All Safety messages in the main text of this manual are labeled WARN-ING or CAUTION. These mean the following:

WARNING: Important information to alert you to a situation that might cause serious injury and damage to your property if instructions are not followed properly.

CAUTION: Important information that tells how to prevent damage to your equipment or how to avoid a situation that might cause minor injury.

In addition to the warnings and cautions included in the text of this manual, please read and observe the following safety instructions.

- ① Read all of these instructions.
- ② Save these instructions for later use.
- ③ Follow all warnings and cautions marked on the product.
- ④ Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- ⑤ Do not use this product near water, for example, near bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- ⑦ Do not use a telephone in the vicinity of a gas leak to report the leak.

- ③ Do not place this product on an unstable cart, stand, or table. The product may fall, causing serious damage to the product or injuring the user.
- Slots and opening in the cabinet and the back or bottom are provided for ventilation; to ensure reliable operation of the product and to protect it from overheating, these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other surface. This similar product should not be placed in a built-in installation unless proper ventilation is provided.
- This product should be operated from the type of power source indicated on the marking label. Using a different power source may result in injury or accident. If you are not sure of the type of power available, consult an authorized sales person or your local power company.
- This product is equipped with a 3-wire grounding type plug, a plug having a third (grounding) pin. This plug will only fit into a grounding-type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the purpose of the grounding type plug. (This does not apply in countries in which the 2-wire, non-grounded type of plug is used.)

- Do not allow anything to rest on the power cord. Do not locate this product where persons will walk on the cord.
- ③ If an extension cord is used with this product, make sure that the total of the ampere ratings on the products plugged into the extension cord does not exceed the extension cord ampere rating. Also, make sure that the total of all products plugged into the wall outlet does not exceed 15 amperes.
- Wever push objects of any kind into this product through cabinet slots as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock. Never spill liquid of any kind on the product.
- ⑤ Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risks.

Refer all servicing to qualified service personnel.

- Do not take apart or attempt any modifications to this machine. There is a risk of fire, electric shock, explosion or loss of sight.
- ⑦ Do not incinerate used toner or toner containers. Toner dust might ignite when exposed to open flame. Dispose of the used toner containers according to local regulations for plastics.
- Inplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:
  - When the power cord or plug is damaged or frayed.
  - If liquid has been spilled into the product.

- If the product has been exposed to rain or water.
- If the product does not operate normally when the operating instructions are followed. Adjust only those controls that are covered by the operating instructions since improper adjustment of other controls may result in damage and will often required extensive work by a qualified technician to restore the product to normal operation.
- If the product has been dropped or the cabinet has been damaged.
- If the product exhibits a distinct change in performance, indicating a need for service.

# When to Call Your Service Representative

WARNING: Do not attempt any maintenance or troubleshooting other than that mentioned in this manual. This machine contains a laser beam generator and direct exposure to laser beams can cause permanent eye damage.

Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:

- When the power cord or plug is damaged or frayed.
- ② If liquid has been spilled into the product.
- ③ If the product has been exposed to rain or water.
- ④ If the product does not operate normally when the operator's manual are followed. Adjust only those controls that are covered by the operator's manual since improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to normal operation.
- ⑤ If the product has been dropped or the cabinet has been damaged.
- ⑥ If the product exhibits a distinct change in performance, indicating a need for service.
- ⑦ If smoke is coming out, there is a strange smell or anything looks unusual.
- ③ Do not use reuse stapled paper. Do not use aluminum foil, carboncontaining paper or other conductive paper. Otherwise, a fire might occur.

- After you move the machine, fix it with the caster fixture. Otherwise the machine might move or come down to cause a personal injury.
- When removing misfed paper, do not touch the fusing section because could be very hot.

# **Power And Grounding**

## **Power Supply**

- Power requirements: 220-240V, 50/60 Hz
- Insert the power plug securely into the wall socket.
- ③ Make sure that the wall outlet is near the machine and readily accessible.
- ④ Do not connect other equipment to the same socket.
- ⑤ Do not step on or set anything on the power cord.
- Do not connect other equipment to the same extension cord.
- Be sure that the power cord is not in a position where it would trip someone.
- (a) The wall outlet must be easily accessible.
- ⑦ Do not damage, break or make any modifications to the power cord. Do not place heavy objects on it, pull it hard or bend it more than necessary. These actions could cause and electric shock or fire.
- Do not plug or unplug the power cord with wet hands or an electric shock might occur.
- When you move the machine, unplug the power cord from the wall outlet to avoid fire or electric shock.
- When you pull out the plug from the socket, grip the plug to avoid damaging the cord and causing fire or electric shock.

## Grounding

Ground the machine and the lightning protection circuit in accordance with regulations. Do not ground to gas or water pipes, or to a telephone ground plug. Proper grounding is to the ground terminal of the power outlet. Be sure that the ground terminal of the power outlet is properly grounded.

The lightning protection circuit for the machine requires the machine to be properly grounded. If proper grounding is provided, about 90 % of lightning damage can be prevented. For safety, be sure to connect the machine to a three-prong grounded outlet.

# **Other Important Informations**

## General

- ① Since some parts of the machine are supplied with high voltage, make sure that you do not attempt any repairs or attempt to access any part of the machine except those described in this manual.
- ② Do not make modifications or replacements other than those mentioned in this manual.
- ③ When not using the machine for a long period, disconnect the power cord.
- ④ Keep the machine away from humidity and dust. A fire or an electric shock might occur.
- ⑤ Do not reuse stapled paper. Do not use aluminum foil, carbon-containing paper or other conductive paper. Otherwise, a fire might occur.
- ③ This machine has been tested for safety using this supplier's parts and consumable. We recommend you only use these specified supplies.
- ⑦ Ventilate the room around every half an hour during a long copy run or while printing a long message.

#### Ozone

The machine generates ozone during operation. Normally, the ozone level is safe for operators. However, during a long copy run or while printing a long message, ozone odor may appear; in such a case, ventilate the room.

## **Cold Weather Power-up**

Avoid raising the room temperature abruptly when it is below 14°C, or condensation may form inside the machine.

- ① Raise the room temperature to 20°C at less than 10°C per hour.
- ② Wait for 30 to 60 minutes.
- ③ Turn the power on.
- ④ Do not use the machine near a humidifier.

### Thunderstorms

With proper grounding, about 90 % of lightning damage can be prevented. However, if possible, during severe electric storms turn the power switch off and disconnect the power cord and telephone line cord.

# **Operating Precautions**

- While the machine is in operation, do not turn off the main switch or unplug the power cord.
- Keep corrosive liquids, such as acid, off the machine.
- Do not allow paper clips, staples, or other small metallic objects to fall inside the machine.
- The fusing unit may be very hot. Be careful when handling it.

# Copy Paper

- 60 to 90/ m<sup>2</sup>. copy paper is recommended.
- Do not use damp paper, or copies will be defective.
- Do not touch copy paper if your fingers are wet or oily; fingerprints may appear on the copy.
- Keep paper in a vinyl bag if it will not be used for a long time.
- Store in a cool dry place.
- Store flat. Do not stand upright.
- The following materials cannot be used in the paper cassettes: Post cards, Tracing paper, OHP sheets, Adhesive labels
- Do not overload the paper trays.
- If Multi-sheet Feeding occurs or dog-eared copies are made when using recycled paper in the paper tray, fan the recycled paper and load it in the paper tray again.

# Symbols & Conventions Used In This Manual

#### Documents:

A document is anything you put on the feed table of your machine whether you are faxing it or copying it.

### Prints:

A print is anything that comes out of the machine: a fax message you received or a copy you made.


#### Procedures:

Procedures are described step by step. Perform them in order. When you see a display, it always shows what comes after performing the step it accompanies. Other illustrations accompanying steps help you find the right key or handle, or show you how to perform the step.This is a step in a procedure.

THIS CORRESPONDS TO THE LCD DISPLAY.

# 2. Machine Layout

# **Part Names**

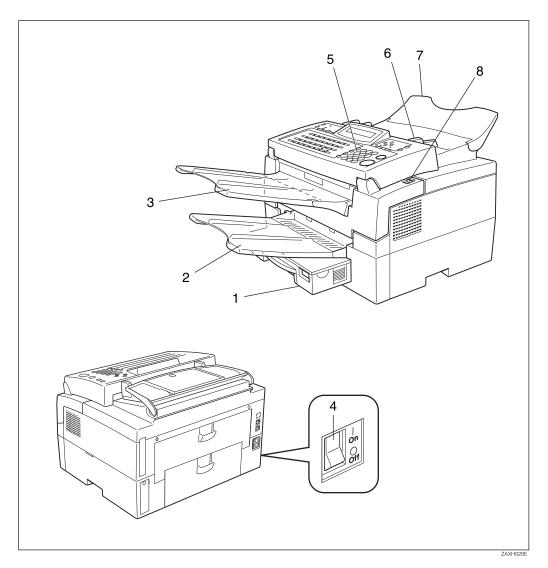

### **1.** Paper cassette

The paper cassette holds copy paper.

### 2. Print delivery tray

Copies and incoming faxes are delivered here.

### **3.** Document delivery tray

Scanned documents are stacked on the Document delivery Tray.

#### 4. Main switch

The main switch turns your machine on and off.

### **5.** Operation panel

Key panel for operating the machine.

### 6. Document guide

Match the document guide to the size of your original documents.


### 7. Document table

Document table holds up to 30 sheets which are fed one at a time. Place your original documents here.

#### **8.** Cover release button

Pull this catch to release the top cover.

# **Operation Panel**

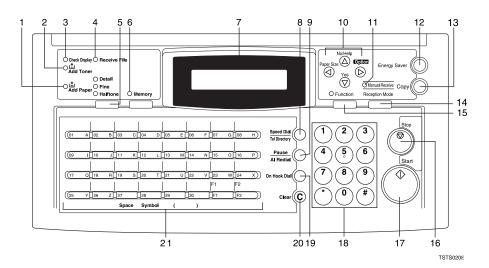

### 1. Add Paper indicator

Lights when a cassette is empty.

### 2. Add Toner indicator

Blinks when toner is about to run out and lights continuously when toner has run out.

### 3. Check Display indicator

The **Check Display** Indicator lights to tell you to read the display.

### 4. Receive File indicator

The **Receive File** indicator lights when an incoming message was received into memory. Blinks when confidential reception file is stored in the memory. (see P.93 *"If An Indicator Lights Up On The Operation Panel"*).

### 5. [Resolution] key.

The resolution / Halftone is indicated by these three indicators and can be changed by the resolution / Halftone.

### 6. Memory indicator

When the **Memory** indicator is on, then memory transmission is in effect, if it is off, immediate transmission is in effect. Switch between the two with the **[Memory]** key.

### 7. Control panel Display

The Liquid Crystal Display guides you through tasks and informs you of the state of the machine. Messages appear here. The display consists of two 20-character lines.

### 8. [Speed Dial/Tel Directory] ${\bf key}$

Press the **[Speed Dial/Tel Directory]** key using Speed Dialor the Telephone Directory Feature.

### 9. [Pause/Al Redial] key

The **[Pause/Al Redial]** key inserts a pause when you are dialing or storing a fax number. Or, press the key to redial the last number dialed. (The redial feature doesn't work once you've started dialing a new number.)

### 10. Arrow keys

- ▼ [Yes] accept
- ▲ 【No】 reject / print help list
- ◄ scroll left
- ► scroll right

### 11. Manual Receive indicator.

Lights when the reception mode is Telephone.

### 12. [Energy Saver] key

Hold a few seconds this to start or end the energy saver mode.

### 13. [Copy] key

Press this to copy the document now in the feeder.

### 14. [Reception Mode] key

Press this to select the reception mode ( Tel, Auto, or Fax).

### 15. [Function] key

Press the **[Function]** key and enter a two digit code to access functions 11 to 52. (For functions 61 to 95, enter 6, the access code on see P.113 "*Access Code For Functions 61 To 95*" and the function number.)

### 16. [Stop] key

Press the **[Stop]** key to stop a transmission or a document scanning, to stop a reception or to stop a long copy run. The machine will finish printing out the sheet being printed and then stop.

### 17. [Start] key

Press the **[Start]** key to start all tasks.

### 18. Ten key pad

Use the ten key pad (sometimes called the ten keys) to dial fax numbers, to enter the numbers of copies, etc.

### 19. [On Hook Dial] key

Press the **[On Hook Dial]** key to dial a phone call from the keypad without having to lift the phone or handset off the hook (phone or handset option needed).

### 20. [Clear] key

Press the **[Clear]** key to erase the last character or digit entered, or use the left and right arrow keys to move the cursor and then press Clear to erase whatever is at the cursor.

# 21. [Quick Dial] keys / [User Function] keys.

There are 30 Quick Dial keys. Use them to store individual fax numbers (see P.25 *"Storing & Editing Fax Numbers (Functions*  31 & 32)") or groups (see P.28 "Storing & Editing A Group Of Fax Numbers (Function 33)"). You can also use these keys to enter characters (see P.122 "Entering Characters"). In addition you can register Quick Dial 29 as the Dial Option key (see P.31 "Programming The Dial Option Key".)You can also use Quick Dial 30 as a Group key (see P.29 "Programming The Group Key"). You can store combinations of settings that you use on a frequently basis in the two User Function keys (F1,F2). When you press a User function key, it lights to show you that it is selected.

# 3. Faxing


# **Recommended Types Of Document**

Before you send your document, make sure that it meets the following requirements.

### ∰Important

Documents that do not meet these requirements can cause your machine to jam or may cause some components of the machine to become damaged or dirty.

### Scanning area

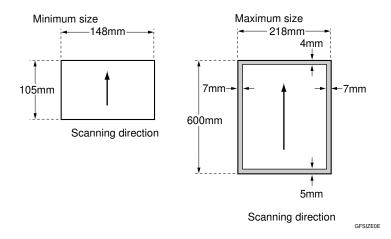

The part shaded will not be scanned, because it is outside the maximum scanning width range.

## **Correct Size For The Document Delivery Tray**

- Thickness 0.05 to 0.2 mm (  $50 \sim 90 \text{ g} / \text{m}^2$  )
- Length and Width: See the above diagram. If the page is too short, put it inside a document carrier or enlarge it with a copier.

If the page is too long, divide it into two or more sheets.

Clearly Written

• Small faint characters may not be transmitted clearly.

### Uniform Page Size

• Do not use different sizes of document in the same transmission.

# **Page Condition**

Do not place damaged pages in the automatic document feeder.

- If your pages are curled or dog eared, flatten them.
- If your pages are stuck together, shuffle the stack.
- If your pages are folded, torn, or patched together, make copies.
- If your pages have binding files, trim the edges or make copies.

### ∰Important

- Do not place originals that contain the following materials in the document feeder ;
- Crayon
- Paint
- Charcoal, soft pencil
- Glue
- Thermal paper
- Clips
- OHP Sheets, vinyl-coat paper
- Waxed paper
- Carbon paper
- Silicone oil

### 🖉 Note

□ Copies made with a copier that uses silicone oil may cause a misfeed. To avoid this, do not scan such copies until five or ten minutes after copying.

# Memory Transmission And Immediate Transmission

There are two ways to send a fax message.

- Immediate Transmission
- Memory Transmission

# Memory Transmission (Memory Indicator Lit)

Memory Transmission is convenient because:


- Fax messages can be scanned much more quickly (you can take your document away from the fax machine without waiting too long).
- While your fax message is being sent, another user can operate the machine (people will not have to wait by the fax machine too long).
- You can send the same message to more than one place with the same operation.
- After you press the **[Start]** key, the machine doesn't dial until all the pages of your fax message have been stores in the memory.

### 🖉 Note


□ If your document gets stuck while it is being processed, press the **[Stop]** key, and turn to P.95 *"Clearing a Document Jam"* for instructions on how to safely remove the original.

# **1** Make sure that the machine is in standby mode for faxing.

The display should look like this:




Fan your document stack (at most 30 pages: 80 g / m<sup>2</sup> to make sure all pages are loose, then square it.



## 🖉 Note


- □ All pages in your document must be one-sided and be of the same size.
- **3** Insert the document face down into the feeder until the machine beeps. Then adjust the guides to match the width of the document.



### 🖉 Note

You can dial before you set the document. Place the document after you dial the number and go to step 2.


Please set your document straight in the feeder. If you set more than 15 sheets, make sure the ends of your document are not skewed.



4 The display will look like this:

TRANSMIT OPTION⊮ DIAL FAX NUMBER

- **5** If the memory indicator is not lit, press the [Memory] key.
- Dial the number in one of the following ways.

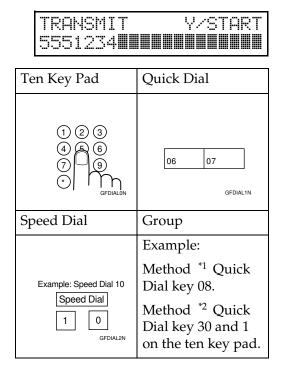

- <sup>\*1</sup> In this example Group Dial is programmed in Quick Dial 08.
- \*2 In this example Quick Dial key 30 is programmed as the Group key, and Group dial number 1 is programmed.

### 🖉 Note

- If you install the handset or an external telephone, you can send the message manually. Pick up the handset and dial.
- If you want to erase a digit of the phone number, press the [Clear] key. If you want to erase the entire number, press the [No] key.
- The maximum destinations you can dial using the ten key pad is 49. However, this limitation is also subject to memory capacity.

### 

Programming Quick Dial: see P.25 "Storing & Editing Fax Numbers (Functions 31 & 32)".

Programming Speed Dial: see P.25 "Storing & Editing Fax Numbers (Functions 31 & 32)".

Programming Group Dial: see P.28 "Storing & Editing A Group Of Fax Numbers (Function 33)".

Programming Group key: see P.29 "Programming The Group Key".

# Press the **[Yes]** key to enter another number.

TRANSMIT	DIAL/START
DIAL NEXT	FAX NUMBER

### 🖉 Note

□ Repeat steps **1** and **1** until all destinations are entered.

- □ If you have only one destination, press the **[Start]** key.
- The machine stores your message and dials the first number (or, if you selected Send Later, it will return to standby mode and the fax message will be sent at the time that you selected).

### 

Send Later: see P.21 "Sending At A Specific Time (Send Later)".


### Press the [Start] key and wait.

The machine will dial the destination's number.

5551234 SET DOC. OR DIAL NO.

### 🖉 Note

□ If the other party's line is busy, your machine will dial again. P.24 "*Redialing*"



- If the other party's fax machine answers, both machines will connect and yours will send the message. A name or a label will appear on the upper line.
- If your line goes through a local switchboard (a PBX) remember to dial the exit code. Press the [Pause] key immediately after the code. If the number includes a country code, press the [Pause] key after the country code, then dial the rest of the number.

If you like to cancel the transmission

Press the [Stop] key during communication.

5551234 STOP & CLR FILE? Y/N

**2** Then press the **[Yes]** key to cancel the transmission.

### Immediate Transmission


Immediate Transmission is convenient when:

- You wish to send a message immediately.
- You wish to quickly check whether you have successful connected with the other party's fax machine.
- Your machine's memory is getting full.

The machine dials immediately after you press the **[Start]** key (or at the specified later time, if you used a time-delay feature like Send Later). The message is scanned and transmitted page by page without being stored in memory.

# **1** Make sure that the machine is in standby mode.

The display should look like this:



### 🖉 Note

□ The memory indicator should go out. If the memory indicator is lit, press the [Memory] key.

**2** Place the entire document face down into the feeder.

3

#### TRANSMIT **OPTION**▶ DIAL FAX NUMBER


### Note 🖉

- □ No more than 30 pages.
- You can dial before you set the document. Place the document after you dial the number and go to step 4.

### <sup>P</sup>Reference

How to set document, see P.13 "Memory Transmission (Memory Indicator Lit)".

# Dial.



### PReference

How to dial, see P.13 "Memory Transmission (Memory Indicator *Lit*)".

## Press the [Start] key.

5551234 DIALING

The machine dials and connect to the other party. The number that you dialed and the other party's RTI or CSI is displayed.

### ✓ Reference


RTI, CSI: see P.135 "Initial Settings & Adjustments".

## Dialing with the Telephone Directory

This can be done for any number that you have stored as a Speed Dial code with a label programmed for it.

Example : you wish to dial " XYZ CO. NEWYORK ".


**1** Make sure that the machine is in standby mode.



**2** Carefully place your fax message into the auto document feeder.

TRANSMIT OPTIONN DIAL FAX NUMBER

E Press [Speed Dial/Tel Directory]



Press the first letter of the name.

TEL DIR. Y/ 🕪 XA COMPANY 801

**U** If the label you want does not appear, scroll through the labels using with ◀and ▶ until you find it.

TEL DIR. 812 XYZ CO.NEW YORK

**D** Press **[Yes]** to dial the number you want.

## **7** Either :

- Dial more numbers.
- Press [Start]

# Receiving Telephone Calls & Fax Messages (Faxes/Phone Calls)

The machine can treat incoming fax messages and telephone calls in three ways.

### Auto mode

Use this mode if your line is shared by a fax machine and telephone. When a call comes in, the machine will ring a number of times to give you the chance to pick up the handset. If you do not pick up and the call is a fax message, the machine will go into fax mode and start receiving. You can choose the number of times the machine rings before taking the call by altering the Auto Ring time (see P.18 "Setting the Auto Ring Time" ).

### Fax mode

Use this mode if you have a dedicated fax line. The machine assumes all calls are fax messages. It will ring once to alert you to an incoming call and then start receiving.

### Telephone mode

Use this mode if your line is shared by a fax machine and a telephone but you wish to answer all calls yourself and decide whether they are fax messages or telephone calls. You must manually hit the Start key to receive a fax.

The machine will ring continuously until you answer the call, so you have to be near the machine at all times.

The Manual Receive indicator is lit when the machine is in this mode.

# Switching Between Auto, Fax and Telephone Mode

The Manual Receive indicator is lit when the machine is in Telephone mode. To switch to a different mode, follow the steps below.

## Press the [Reception Mode] key.

RECEIVE MODE Y/4) FAX TEL AUTO

2 Press the ◀and ▶ key to select the mode you require.

RECEIVE MODE Y/40 FAX TEL DAUTO

Press the **[Yes]** key.

READY 100% 10:00 SET DOC. OR DIAL NO.

# Receiving the Fax Message in the Telephone Mode

This mode is active when the Manual Receive indicator is lit. You have to answer the call yourself and decide whether it is a fax or a telephone call. The procedure for answering a call is as follows:

Pick up the handset of the optional handset or the external telephone.

**2** Listen to the other end.

3

#### If you hear a voice

Continue your conversation as you would normally.

If you hear a fax tone

• Remove any documents from the feeder, press the [Start] key then replace the handset.

The machine will start receiving.


### Setting the Auto Ring Time

In Auto mode, the machine rings a number of times to give you the chance to pick up the handset before taking the call automatically. You can alter the number of rings by changing the Auto Ring Time.

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [6] [1] and the [Yes] key.

Y/NEXT⊮ SET OWN NUMBER

Press ▶ until the following display appears.



### Press the **[Yes]** key.

The factory setting will be displayed.

NO. OF RINGS Y/N 08 RINGS

### 🖉 Note

- □ If you wish to keep these settings, go to step **9**.
- Press the [No] key, then press the new number using the ten key pad.
- Press the [Yes] key, then the [Function] key.

# Printing Received Messages That Have Been Stored (Substitute Reception)

If the Receive File indicator is lit, a message was stored in memory using substitute reception. This could be because the machine ran out of paper or toner, or because the Power Saver has turned off the print engine.

Check the following items and solve the problems, and the machine goes back to the working condition.

- While the Power Saver (see P.68 *"Saving Energy With The Power Saving Timer"*) has turned off the heater off, press any key for the machine go back to the working condition.
- When ADD PAPER appears in the display, your fax machine is out of paper. Add paper (see P.77 "Loading Paper In The Main Cassette").
- When ADD TONER appears in the display, your fax machine is out of toner. Change the toner cassette (see P.80 "*Replacing The Toner Cassette And Cleaning Pad*").
- Otherwise, there might be a paper jam (see P.96 *"Clearing a Copy, Fax, or Print Jam"*) or an open cover.

As soon as the machine is back in working condition, messages stored in memory will be printed. The Receive File indicator will turn off and the messages will be erased from memory.

### 🖉 Note

□ If a message comes in while you are copying, the fax machine will store the message in memory and the Receive File indicator will light. The message will be printed as soon as copying is done.

□ To turn substitute reception off or back on, set bit 0 of user parameter switch 05. See P.114 "User Parameters".

20

# Faxing A Page With Very Fine Detail

So that text, diagrams and images stand out clearly in your document, the machine automatically detects the image density (contrast) and makes a compensation.

However, if you need to send a document which requires optimum clarity, select the resolution setting appropriate to your needs.

You can select different settings for each page of your message. Simply change the settings for page 2 while page 1 is being scanned.

### **Resolution & Shading**

The resolution button gives you control over document quality. The indicators above the button show the current setting. Choose a setting that matches your document.

#### Standard:

Standard quality. Use for most printed or typewritten documents. This is selected when the other resolution indicators are not lit.

#### Detail:

High quality. Use for documents with small print or fine details.

#### Fine:

Very high quality. Use this for high quality reproduction.

#### Halftone:

Use this for optimum quality if your document contains photographs/diagrams with complex shading patterns or gray tones. If you choose this setting, resolution will automatically be Detail.

### 🖉 Note

Faxing at a higher resolution requires more time. Frequent use of high resolution could cause an increase in your phone bill, especially for long distance transmissions.

# **Optional Features For Transmission**

# Sending At A Specific Time (Send Later)

This feature is called Send Later.

Using this feature, you can delay transmission of your fax message until a specified time. This allows you to take advantage of off-peak telephone line charges without having to be by the machine at the time.

## 🖉 Note

If your machine's memory is full, you will have to send the message from the document feeder. This means that anybody removing your document would automatically cancel the operation.

### Proceed as for a usual fax message but don't press the [Start] key.

## 2 Press ▶ twice.

SET OPTION Y/> SEND LATER?

## 🖉 Note

 $\Box \rightarrow$  is also the **[Option]** key.

## Press the **[Yes]** key.

Enter a sending time that falls within the following 24 hours.

SET OPTION	KPAD/Y
TIME 23:30	10:00

## 🔗 Note

□ For example: To send at 23:30, press [2] [3] [3] and [0] from the key pad.

□ If you enter the wrong time, press the **[No]** key and enter again.

# • Press the **[Yes]** key.

## 🖉 Note

□ Use function 21 to erase a stored fax message before it is sent (see P.34 *"Erasing A Stored Message Before It Is Sent (Functions 21 &* 22)").

# Printing The Page Number (Page Count)

This feature is called Page Count.

When your fax message is printed at the other end, page numbers will be printed on the top of each page. Using the Page Count feature, you can select the batch-numbering page numbers.

If you use Page Count, page numbers will be printed in batch-numbering format (for example, p1/3, p2/3, and p3/3 for a three-page message). This makes it easy for the other party to see how many pages you sent, and if any are missing. However, you have to input the number of pages at the ten key pad before sending.

If you do not use Page Count, page numbers will be printed only as a sequence (for example, p1, p2, p3). This makes it difficult for the other party to tell at a glance whether any pages are missing (for example, due to a double feed in your machine's document feeder).

## Limitation


This feature is available at Immediate Transmission.

### 🖉 Note

- If you do not select Immediate Transmission, Page Count is automatically switched on, and the pages are counted automatically.
- □ If the numbering with page count appears strange, check that the page count value matches the number of pages in your document.
- **1** Press ▶ until the following display appears.

SET	OPTION	Y.∕ <b>≯</b>
SET	PAGES?	

Press the **[Yes]** key.



Enter [1] and [0] using the ten key pad.

SET OPT	ION	YZN
PAGES:	10	

### 🖉 Note

□ Example: 10 pages

**4** Press the **[Yes]** key.

# Sending Your Identification At The Top Of Your Message (TTI)

Normally, the TTI programmed in your machine is printed at the top of each of the pages you transmit when they are received at the other end. The top of the image will be overprinted if there is no margin at the top of the transmitted page. In some cases, you may wish the other party to receive an unmarked copy of your original. In this case, you can switch TTI off.

**1** Press ► until the following display appears.

SET	OPTION	Y∕ <b>≯</b>
TTI	PRINT?	

**2** Press the **[Yes]** key.

SET OPTION Y/+ DN OFF

B Press ◀ or ▶ until the displayed setting is correct.

SET	OPTION	Y∕♦
ON	▶OFF	

Press the [Yes] key when you have finished.

## **Personal Codes**

Personal Codes do the following.

- They allow you to keep track of machine usage. If everybody uses a Personal Code when they use the fax machine, the codes, or the names programmed into the codes, will be printed on the report that is called the Journal. This will help you to check on who has been using the machine, and how often.
- They allow personalization of documents and printed reports. For example, if you use Label Insertion and store your name with your Personal Code, the receiver of your fax message will see your name at the top of the printout. This eliminates the need for a cover page.

If you input your Personal Code, your name will appear on the JOURNAL and Transmission Result Report.

#### ₽ Reference

See P.47 "Programming the personal codes".

See P.64 "Journal (Function 41)".

Label Insertion: See P.122 "Entering Characters".

**1** Press ▶ and make sure that the display is as shown.



## **2** Press the **[Yes]** key.

SET OPTI	ON	KPAD
PERSONAL	CODE	

#### Enter the personal code.

🖉 Note

□ Example: **[7] [3] [6] [2]** 

SET OPTION Y/N PERSONAL CODE:7362

Press the **[Yes]** key.

## Redialing

If a message was not transmitted successfully, that does not mean that you have to enter the telephone number again. In many cases, the machine will redial the destination automatically. Or, with the AI Redial key, you can redial with just a few keystrokes.

## **Automatic Redialing**

The machine will automatically redial the other party if any of the following conditions occurred.

- The other party was busy
- There was no reply from the other party
- The message was rejected by the machine at the other end because of excessive errors (in this case, redialing will only take place if Memory Transmission was used)

#### 🖉 Note

- Redialing is done once at 5 minute intervals.
- The number of redials and the redial interval may be adjusted by a service technician.
- During redialing, the number being dialed is displayed as shown below.

2125551234 DIALING


## Using the AI Redial key

The machine remembers the last 10 telephone numbers that you input. If you have to redial one of these numbers, just press the **[Al Redial]** key, un-

til the required telephone number or name is displayed, then press the [Start] key.

This feature has the following uses.

- If the machine is waiting to redial the other party, you do not have to wait for the redialing interval to expire. Press the **[Al Redial]** key until the required telephone number or name is displayed, then press the **[Start]** key.
- If you wish to send another message to the same address that you sent one to recently, you don't have to dial the full number again if it is still in the Redial memory. Place the message in the feeder, then press the **[Start]** key.
- Press the [Pause/Al Redial] key until the required number appears in the display, then press the [Yes] key twice.



**2** Carefully place your fax message into the Document Guide feeder.

TRANSMIT	DIAL/START
DIAL NEXT	FAX NUMBER

If you dial another party

Select another number. (Broadcasting)

#### If you dial no more party

• Press the [Start] key to start the transmission.

# Storing & Editing Fax Numbers (Functions 31 & 32)

You can store numbers that you often use in the machine's memory. A stored number will remain in memory even if the power is cut.

You can store numbers in two ways.

#### Quick Dials

The number is assigned to its own key. To dial that number, just press the key. You can store up to 30 numbers in this way.

#### Speed Dials

The number is given a two-digit code. To dial the number, press the **[Speed Dial]** key and enter the code. There are 50 Speed Dial codes available numbered 00 to 49.

## Storing, Editing & Erasing Quick Dial Numbers (Function31)

This procedure describes how to store and edit fax numbers in Quick Dial keys.

## Press [Function] [3] [1] then the [Yes] key.

QUICK/4) PRINT LIST4/SEARCH)

**2** Select a Quick Dial in any one of the following ways:

•Press a Quick Dial key (e.g. press Quick Dial 01).

```
001 PROGRAM?
```

• Press the ► key until the Quick Dial you want appears on the display.

#### 🖉 Note

□ To print a list of all Quick Dials and their contents, press ◄ then the **[Start]** key.

## Press the **[Yes]** key.



### **4** Do one of the following:

•Enter the fax number you wish to store in this Quick Dial using the ten key pad. Then press the **[Yes]** key.



•To clear the number, press **[No]**, **[Yes]** then go to step **D**.


## **5** Do one of the following:

• If you wish to enter or edit a label for this Quick Dial, press the **[Yes]** key.



•If you do not wish to give this number a label, press **[No]** then go to step **[3**.

**6** Enter or edit the label using the Quick Dial keys and the ten key





## Press [Yes] key.



3

Press ◄ or ▶ a to select whether the label for this Quick Dial will be printed on top of messages that you send to this destination.

#### Press [Yes] key.



## **D** You now have two choices:

- •To store, edit or delete another Quick Dial, go to step **2**.
- •To finish, press [Function].

#### Storing, Editing & Erasing Speed Dial Numbers (Function 32)

This procedure describes how to store and edit fax numbers in Speed Dials.

## Press the [Function] [3] [2] and the [Yes] key.

Ø**∭∭** KPAD∕**∢**Þ Print List∢∕searchÞ

## **2** Select a Speed Dial in any one of the following ways:

•Enter the Speed Dial code one the ten key pad. (e.g. 01)

```
801 PROGRAM? Y∕4▶
```

• Press the ► key until the Speed Dials you want appears on the display.

#### 🖉 Note


□ To print a list of all Speed Dials and their contents, press < keys and then [Start] keys.

## Press [Yes] key.



## **4** Do one of the following:


• Enter the fax number you wish to store in this Speed Dial using the ten key pad. Then press **[Yes]**.



•To clear the number, press **[No]**, **[Yes]** then go to step **D**.

## **5** Do one of the following:

• If you wish to enter or edit a label for this Speed Dial, press **[Yes]** key.



• If you do not wish to give this number a label, press **[No]** then go to step **B**.

**6** Enter or edit the label using the Quick Dial keys.

801 ABC Y/N NEW YORK OFFICE

26

Press [Yes] key.



B Press a ◄ or ► to select whether the label for this Speed Dial will be printed on top of messages that you send to this destination.

## Press [Yes] key.



## **①** You now have two choices:

•To store, edit or delete another Speed Dial, go to step **2**.

•To finish, press [Function].

## Storing & Editing A Group Of Fax Numbers (Function 33)

#### Groups

If you regularly broadcast messages to the same set of destinations, you can combine these numbers into a group. Then just select the group and each number will be dialled in sequence automatically. You can program up to 5 groups with 100 numbers each.

This section describes how to program or edit a Group. You can also get a printout of numbers that are already stored. In this example we will program Group 1 into Quick Dial key 01.

You can store up to five groups numbered 1 to 5.

You can program up to 100 numbers in a Group.

## Press the [Function] [3] [3] and the [Yes] key.



**2** Enter the number of the group you want to program or edit.

#### 🖉 Note

- **□** e.g. Group 1: Press **[1]**.
- □ To print a list, press ◄ then the **[Start]** key.

#### Press the **[Yes]** key.



To program or edit a Quick Dial key for this group, press the **[Yes]** key.

#### 🖉 Note

- □ If you do not program or edit, press the **[No]** key and go to step **[**.
- **5** Press the Quick Dial key you wish to use for this group, **[01]** for example, then press the **[Yes]** key.

#### 🖉 Note

□ If you want to free up the old Quick Dial key, press the **[No]** key, then the **[Yes]** key.

GROUP 1 Y/N PROGRAM LABEL?

- □ If a message like USED AS.. flashes up, the key is already in use. Press a different key.
- If you wish to give this group a name, press the **[Yes]** key.



#### 🖉 Note

□ If not, press the **[No]** key and go to step **①**.

## **2** Enter or edit the name then press the **[Yes]** key.

How to enter characters, see P.122 "Entering Characters"



### 8 Enter a fax number.

#### 🖉 Note

- $\Box$  Enter one in one of these ways.
- Press a Quick Dial key.
- Press the Speed Dial key followed by two digits.
- Enter a number on the ten key pad.

### Press the **[Yes]** key.

#### 🖉 Note

□ If ALREADY PROGRAMMED briefly flashes up on the display, either press the **[No]** key to keep the number and choose another number, or press the **[Yes]** key to overwrite.

Press the [No] key to finish entering numbers in this group.

### 🖉 Note

□ To enter another number, go back to step **9**.

I Press the [Function] key.

#### 🖉 Note

□ To work on another group, go to step **2**.

## **Erasing Groups**

These steps describe how to erase single numbers from a group.

Press the [Function] [3] [3] and the [Yes] key.



2 Enter the group number using the ten key pad, then press the [Yes] key.

GROUP 1 Y/N PROGRAM QUICK?

## Press the [No] key.

GROUP	QUICK/N
PROGRAM	LABEL?

### Press the [No] key.

GROUP 1 Y/N CLEAR?

#### **5** Press the **[Yes]** key.

GROUP 1 Y/N CLEARED

## **6** Press the **[Function]** key.

#### 🖉 Note

□ To delete another number, go to step **2**.

## Programming The Group Key

You can program the 5 groups. However, if there is no room in Quick Dial keys, this group key is helpful. You have to program the 30 of the Quick Dial key as the group key. How to transmit using the group key, see P.13 *"Memory Transmission (Memory Indicator Lit)"*.

## Press the [Function] [3] [1] and the [Yes] key

	QUICK/40
PRINT	LIST∢/∕SEARCH⊮

## **2** Press the Quick Dial [30].



## Press the **[Yes]** key.



## Press the **[Yes]** key.



**5** Press the [Function] key.

Y/N

## **Dial Options**

The Dial Options provide access to various F-code features which are designed to allow confidential transmission and polling reception between different makers' fax machines. Use them if the other party's fax machine is of a different make and supports the F-code features. Before you can use the Dial Options, you need to program Quick Dial key 29 as the Dial Option key if you have not done so already (see below for details).

## Programming The Dial Option Key

This procedure describes how to set up Quick Dial key 29 as the Dial Option key.

## Press [Function] [3] [1] then the [Yes] key.

OUICK/4) PRINT LIST4/SEARCH)

**2** Press Quick Dial key [29].

029

PROGRAM? Y/ 4

## Press the **[Yes]** key.

029 PROGRAM? Y/N PROG. DIAL OPTION?

#### **4** Press the **[Yes]** key.



## **5** Press the [Function] key.

## **Using the Dial Options**

To use the Dial Options, do the following after you have dialed the destination fax number and before you press the **[Start]** key.

**1** Press the Dial Option key (Quick Dial 29).

SUB? (S)

## **2** Do one of the following :

• If you wish to set the SUB code for confidential transmission to different makers' machines, press the **[Yes]** key.



• To skip SUB, press the **[No]** key then go to step **[]** for polling reception from different makers' fax machines.


Enter the SUB code on the ten key pad then press the [Yes] key.

SEP? (P)

Y/N

#### **1** Do one of the following:

• If you wish to set the SEP code, press the **[Yes]** key.



• To skip SEP, press the **[No]** key then go to step **G**.

**5** Enter the SEP code on the ten key pad then press the **[Yes]** key.

## **6** Do one of the following:

• If you wish to set the SID code, press the **[Yes]** key.



• To skip SID, press the **[No]** key then go to step **D**.

**2** Enter the SID code on the ten key pad then press the **[Yes]** key.




#### **8** Do one of the following:

• If you wish to set the PWD code, press the **[Yes]** key.



• To skip PWD, press the **[No]** key then go to step **D**.



V/N

SPACE?

## **D** one of the following:

• If you wish to enter a space, press the **[Yes]** key.

#### TRANSMIT

#### Y/START

- Press the **[No]** key.
- Press the **[Start]** key.

## **Chain Dialing**

This feature allows you to compose a telephone number from various parts, some of which may be stored as Quick Dial Keys or Speed Dial Codes, and some of which may be input at the ten key pad.

You can program commonly used area or country codes into Speed Dial Codes or Quick Dial Keys.

Example: 01133-1-5553333 (From the USA to Paris).

Assume that the following Quick Dial and Speed Dial numbers have already been programmed.

- Quick Dial 01 = 01133 (Overseas to France)
- Quick Dial 02 = 1 (Paris)
- Speed Dial 10 = 555

The machine ask you to operate.

#### On Hook Dial or Handset Mode:

Press **[01] [02]** and the **[Speed Dial]** key, **[1] [0]** then **[3] [3] [3] [3]**.

Other:

Press [01] the [Pause] key, [02] the [Pause] key, [Speed Dial] keys, [1][0], then [3][3][3][3].

## Erasing A Stored Message Before It Is Sent (Functions 21 & 22)

Every time you store a fax message in your machine's memory, a new file is created. A file is also created for storing instructions to pick up a fax message left elsewhere (polling, see P.71 *"Calling To Request A Message (Polling)"*). Each file is given a number. This number appears on the File Reserve Report, Journal and Transmission Result Report. To see which files are currently in memory, you may print a file list.

## 1 Either :

To erase a fax message stored in memory

 To erase a fax message stored in memory; press the [Function]
 [2] [1] and the [Yes] key.

FILE NO.**...** KPAD/**4** PRINT LIST**4**/SEARCH

To erase instructions to pick up a message (polling)

Press the [Function] [2] [2] and the [Yes] key.

Press ► to scroll through the messages.

You'll see the display. A number or a label will appear on the lower line.

FILE NO.027 Y∕∢∳⊧ 5551234

#### 🖉 Note

Press < to obtain a list of all the files and their number. If you already know the number of the file to erase, enter it directly from the ten key pad.</p>

Press the **[Yes]** key.

FILE NO.027 Y/N CLEAR?

- Press the **[Yes]** key again to erase the file.
- **5** Press the **[Function]** key.

#### 🖉 Note

□ To erase another file, go to step 2.

## Printing A Stored Message (Function 51)

If you need to see the contents of any files, use this feature.

## Press the [Function] [5] [1] and the [Yes] key.

FILE NO.**IIII** KPAD/**+** PRINT LIST**+**/SEARCH**>** 

#### 2 Press ► to scroll through the messages.

You'll see the display. A number or a label will appear on the upper line.


FILE NO	.115	Υ⁄
5551234		

#### 🖉 Note

Press < to obtain a list of all the files and their number. If you already know the number of the file to print, enter it directly from the ten key pad and skip to step 4.</li>

#### Press the **[Yes]** key.

A number or a label will appear on the upper line.



## Press the [Start] key to print the message.


## **Confidential Reception**

### Storing & Editing the Confidential ID

#### Programming the Confidential ID

This can be any four-digit code except '0000'. You must enter it to print any messages that have been sent to your machine using Confidential Transmission.


Press [Function] [6] then enter the access code [2] [2] [2] [2]. Then enter [6] [1] then press the [Yes] key.



2 Press ▶ until the screen is as shown opposite.




Press the **[Yes]** key.



**4** Input the Confidential ID that you will be using.

#### 🖉 Note

□ Example : [6] [7] [5] [4] from the ten key pad.



• Press [Yes] and then press [Function] key.

#### **Editing the Confidential ID**


Press [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [6] [1] and the [Yes] key.

Y/NEXT► SET OWN NUMBER

2 Press ▶ until the screen is as shown opposite.

Y⁄NEXT⊮ SET CONFIDENTIAL ID

Press the **[Yes]** key.



Press the **[Yes]** key.

CONFID'L ID Y/N 6754

Press the [No] key then input a new Confidential ID code on the numeric keypad.

Note
Example: [8] [3] [5] [2]

CONFID'L ID Y/N 8352


**6** Press **[Yes]** then **[Function]** key.

## Printing messages Received into Memory (Function 52)


If someone sends you a message using the Confidential Transmission feature, instead of printing it out immediately, the machine stores it in memory. The Receive File indicator on the operation panel blinks to inform you when a confidential message has come in. To print out these messages, follow the steps below.

#### 🖉 Note

- You need to know the Confidential ID before you start this procedure.
- Press [Function] [5] [2] then the [Yes] key.



2 Enter the Confidential ID on the ten key pad (e.g. 1234).



#### 🖉 Note

□ If no messages are stored in memory for this Confidential ID, the display will prompt you for a Confidential ID again. In this case, go to step □.

#### Press [Start] to print the fax message.



#### 🖉 Note

- If more messages are stored for this ID, repeat this step as many times as necessary.
- To check for messages sent with other Confidential ID codes, go to step 2. Alternatively, press the [No] key then the [Function] key to quit this function.

READY	100% 10:00
SET DOC.	OR DIAL NO.

# Sending A Fax Using The External Telephone

You can send a fax message using the handset. (External telephone is required.)

Set the document then pick up the handset.

**2** Dial the other party.

If you hear a voice

• Speak to the other party.

If you hear a high-pitched tone instead of a voice

• Press the [Start] key.

B When you are ready to send your fax message, ask the other party to press the [Start] key.

When you hear a high-pitched tone, press the [Start] key.

**5** Replace the handset.

## **Answering The Telephone**

This feature is available when you connect the external telephone.

#### 🖉 Note

□ If the telephone rings just once, a fax is coming in. Do not pick up the handset.


## If the telephone rings continuously

Pick up the handset and speak to the other party.

If you hear a high-pitched tone

A fax is coming in. Press the [Start] key then hang up.

If the caller wants to send you a fax



#### 🖉 Note

□ If nothing happens after you press the **[Start]** key the telephone may not be properly connected.

## Phoning And Faxing On The Same Call

(External telephone is required.)

## To talk before sending a fax

Pick up the handset.

**2** Dial.

#### Note 🖉

□ Do not press the **[Start]** key.

**U** If you hear a voice speak as a normal telephone conversation.

If you hear a high-pitched tone instead of a voice

- Place your fax message in the feeder, then press the [Start] key.
- When you are ready to send your fax message, place your message in the feeder, then ask the other party to press the [Start] key.

When you hear a high-pitched tone, press the [Start] key.

**6** Replace the handset.

## 4. Other Features

## Verifying Communications, Errors, Counters, Etc.

You can obtain reports from your machine either by having your machine print them out automatically, or by printing them out yourself.

## Automatically printed reports

Unless otherwise indicated, the automatic printing of these reports can be turned on or off by changing the bit of the user parameters (see P.114 "User Parameters").

#### Journal (Switch 03, bit 7)

This report gives details on each communication made by your terminal. It is automatically output after 35 transmissions and receptions.

File Reserve Report (Switch 03, bit 2) If you switch this report on, it is printed immediately after you store a document in memory for Memory Transmission. It gives the file number, the time that it was stored, and the destinations (including any Group numbers that were selected).

#### Power Failure Report (Stays on)

This report is printed if the machine's power was off for long enough to erase files from the memory. The report gives details of the files that were lost. With this information, you may store messages for transmission again, and contact the senders of any received messages that were lost.

#### 🖉 Note

Phone numbers stored in Quick/Speed/Groups are not lost.

Communication Result Report (Memory Transmission) (Switch 03, bit 0)

This report is printed out after memory transmission showing whether it was successful or not. If you have switched this report off, a Communication Failure Report will be printed only when a communication fails.

Transmission Result Report (Switch 03, bit 5)

This report is printed out after immediate transmission showing whether it was successful or not.

- Communication Result Report (Polling result report) (Switch 03, bit 4) This report is printed after your machine polls a message from another machine.
- Communication Failure Report (ON if Communication Result Report is OFF) This report is printed if a memory transmission failure occurred, after a job is completed. It is only printed if the Communication Result Report is switched off, and event of a communication failure.

#### Error Report (Turned on/off by a Service Technician)

This report is printed after each unsuccessful communication. The

communication failure report is printed after a job has been completed. And at the end, it prints a communication failure or transmission result report. Check it, and retransmit any pages that were not sent. If a particular problem continues or gets worse, keep the error reports for the service technician.

#### Polling Result Report

This report is printed after your machine polls a message from another machine.

## Printing Part of the Image on the Report (Switch 04, bit 7)

For reference purposes, the machine prints the first few inches of the fax message on the following reports.

- Communication Result
- File Reserve
- Communication Failure Report

### **Report formats**

\* \* \* COMMUNICATION RESULT REPORT (NOV.1.1999 9:19) \* \* \* TTI XYZ COMPANY FILE MODE OPTION ADDRESS (GROUP) RESULT PAGE Report details appear here

ZAXM020E

#### The Mode Column

See the bottom of the Journal for a full listing of symbols on the Journal. On other reports a code is given, informing the type of communication. These codes are explained below.

#### The Result Column

OK: Successful communication E: An error occurred

#### The Footnote on the Journal

TX counter: Total number of transmitted pages RX counter: Total number of received pages

## **Counters (function 94)**

These counters will help you if you wish to keep a regular check on how many pages your machine has sent, received, and copied. The machine has the following counters:

#### TX Counter:

The number of pages that your machine has sent (transmitted)

#### RX Counter:

The number of pages that your machine has received

#### Scan Counter:

The number of pages that your machine has scanned (including copies)

#### Print Counter:

The number of pages that your machine has printed (including copies, reports and lists.)

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [9] [4] and the [Yes] key.

ТΧ	:003256	
RX	:002648	

## Press the **[Yes]** key to check the SCAN and PRINT counter.

SCAN	:	003287
PRINT	i	002703

## When you have finished, press the [Function] key.

## **Programming Keystrokes**

If you regularly transmit to a particular destination or set of destinations using the same features, you can save a lot of repetitive the ten key pad operation by storing the features and destinations in a Keystroke Program.

Keystroke Programs are stored as Quick Dial Keys.

- If you store a Keystroke Program into a Quick Dial Key, that Quick Dial Key cannot be used for any other purpose.
- Be sure to store your Keystroke Program in a vacant Quick Dial Key.

Example: Let us say that you normally send a daily report to locations A, B, and C at 11 pm (using Sending at a Specific Time). Store these instructions as a Keystroke Program. Then every day, you will only have to place the report in the document feeder, then press that key to set up the transmission.

## Reference

Sending at a Specific Time: see P.21 "Sending At A Specific Time (Send Later)".

### Storing a keystroke program

**1** Make sure that the machine is in standby mode.

READY 100% 10:00 SET DOC. OR DIAL NO.

Place a sheet of paper in the feeder.

TRANSMIT	OPTION⊮
DIAL FAX	NUMBER

#### 🖉 Note

□ Skip step **2** if you are making a Polling Reception program.

Select all required features and telephone numbers as you would normally do.

#### 🖉 Note

Resolution, and halftone cannot be stored in a keystroke program.

Press the [Quick Dial] key that you wish to store the program in.

PROGRAM	Y/N
PROGRAM?	

#### 🖉 Note

- □ Example: 01 of the Quick Dial
- □ Make sure that this key is vacant.

## **5** Press the **[Yes]** key.

The procedure that you just stored will now begin.

QUICK Ø1 TO PROGRAM NO KEY TO CLEAR

**6** Press the Quick Dial key where this program is being stored. In this example, press the Quick Dial [01] If you do not wish to use the procedure now

Press the [Stop] key immediately.

#### Labeling a program

If you store a label for your keystroke programs, the label will appear on the display when you use the program.

Press the [Function] [3] [4] and the [Yes] key.



#### 🖉 Note

- □ If you press ◄ and the **[Start]** key, a Program List will be printed.
- Press the Quick Dial key that holds the program that you wish to label and press the [Yes] key.

#### 🖉 Note

□ Example: **[01]** of the Quick Dial Key and the **[Yes]** key.

Press the **[Yes]** key to program a label for this program.

**4** Input your label, using the Quick Dial keys.



#### ₽ Reference

How to enter the label; see P.122 *"Entering Characters"*.

**5** Press the **[Yes]** key.



To label another program

**1** Go to step **2**.

To return to standby

**•** Press the **[Function]** key.

### Using a program

Before using a program, make sure that the machine is in standby mode.

#### Transmission program

**1** Place your document in the feeder.

TRANSMIT OPTION► DIAL FAX NUMBER

- 2 Press the programmed [Quick Dial] key.
  - Note
  - □ The program begins at once.

#### Free polling reception program

Press the programmed [Quick Dial] key.

#### 🖉 Note

□ The program begins at once.

#### Reference

Picking Up Messages Stored Elsewhere (Polling Reception): see P.71 "Calling To Request A Message (Polling)".

## Erasing a program / Changing the program Label

When you wish to delete a keystroke program, do the following.

## Press the [Function] [3] [4] and the [Yes] key.



2 Press the Quick Dial key that holds the program that you wish to erase, or scroll the Quick Dial using ◀ and ▶.

1908 CHANGE? Y/ 4 USED AS PROGRAM

#### 🖉 Note

Example: [08] of the Quick Dial Key.

YZN

#### Press the **[Yes]** key.

008 PROGRAM LABEL?

To erase this program

Press the [No] key.

**2** press the **[Yes]** key.

To edit the program name

- Press the **[Yes]** key.
- **2** Edit the program name.
- **3** Press the **[Yes]** key.

4 Either ;

OM QUICK∕♣ PRINT LIST∢⁄SEARCHD

To edit or erase another program

Go to step 2.

To return to standby

**1** Press the **[Function]** key.

## Programming the personal codes

The main advantage of Personal Codes is that they allow you to track machine usage You can still use Personal Codes to personalize your fax messages, by using the Label Insertion feature.

Each user can be given a Personal Code. While programming, you can store the following items with each Personal Code:

#### A name:

This will be printed on reports, such as the JOURNAL, to identify the users of the machine.

#### A Confidential ID:

This must be different for each Personal Code, and different from your machine's Confidential ID. If somebody sends you a confidential message, they can override your machine's Confidential ID with the Confidential ID stored with your Personal Code, if you inform them of this ID. If so, the machine will print a Confidential File Report that will inform you when the message has arrived. Then, you must input this Confidential ID to print the message.

#### 🖉 Note

- □ The Personal Code is a four digit code. It can have any value from 0001 to 9999.
- You cannot register more than 30 Personal Codes with Names and Confidential IDs in this machine.

#### 

Using Personal Codes: see P.22 "Personal Codes".

Journal: see P.64 *"Journal (Function* 41)".

Confidential File Report: see P.37 "Printing messages Received into Memory (Function 52)".

Confidential ID: see P.36 "Storing & Editing the Confidential ID".

Receiving Confidential Messages: see P.37 "Printing messages Received into Memory (Function 52)".

## Storing a personal code


Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [7] [2] and the [Yes] key.




#### 🖉 Note

□ If you press ◄ and the **[Start]** key, a Personal Code List will be printed.

#### Press the **[Yes]** key.



Input a Personal Code that you want to store in your machine for later use.



#### 🖉 Note

□ Example: **[5] [4] [7] [7]** from the ten key pad.

If you input the wrong code

Press the [No] key and input again.

Press the **[Yes]** key to store the code.



To store the label for this personal code

• Press the [Yes] key and go to Step 5.

If you do not program for this personal code

- Press the [No] key and go to step **2**.
- **b** Input a name for this Personal Code using the Quick Dial keys or the ten key pad.



#### 🖉 Note

Example: JOHNSON

#### Reference

How to enter the label; see P.122 *"Entering Characters"*.

If you do not wish to store an ID

Press the [No] key and go to step **2**.

Press the **[Yes]** key to store the name.



If you want to program the Confidential ID for this user

Press the **Yes** key.

**2** Input a Confidential ID for the personal code used by this user.

**3** Press the **[Yes]** key.

To enter another code

**1** Go to step **3**.

**2** Press the **[Function]** key to finish.

## Editing or erasing a personal code

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [7] [2] and the [Yes] key.



**2** Scroll the personal code using ►.



PERSONAL CHANGE? Y/N

## Press the **[Yes]** key.

PERSONAL CODE Y/N 5474

To erase this Personal Code

- **1** Press the **[No]** key.
- **2** Press the **[Yes]** key and go back to step **2** to edit another personal code. To finish, press the **[Function]** key.

To edit the contents of this code

**1** Press the **[Yes]** key and go to step 4.

```
YZN.
PERSONAL CODE
PROGRAM LABEL?
```

## 4

To edit the label

**1** Press the **[Yes]** key and go to step 5.

Y/N PERSONAL CODE PROGRAM LABEL?

If you don't edit the label

- **1** Press the **[No]** key and go back to step 2 to edit another personal code. To finish, press the [Function] key.
- **5** Edit the name stored with this code. When the name is correct, press the **[Yes]** key.



To edit the Confidential ID stored with this code

**1** Press the **[Yes]** and **[No]** key then input the ID.

When the ID is correct

**1** Press the **[Yes]** key twice.

To enter or edit another code

**1** Press the **[No]** key and go back to step **2**.

**O** Press the **[Function]** key.

## **Tonal Signals**

On this model the **[\*]** key on the ten key pad is used as the Tone key.

Some organizations offer you a special service by telephone, which you can access by transmitting Touch tone or DTMF tones. If your phone service provides only pulse dialing, or if you are calling over a digital network, the ability to generate Tonal Signals will allow you to access these services.

First, dial the other party. When you are through to the other end, press the Tone key and enter the code number that is needed to access the required feature at the other terminal. You do not need to press the Tone key if your machine is set up for dialing in Tone Dial (DTMF) mode.

#### Using the tone key

- **1** Make sure that the machine is in standby mode, and that there is no document in the feeder.
- Pick up the telephone handset, or press the [On Hook Dial] key.
- Dial the remote facility. Do not press the [Start] key.

#### 🖉 Note

- □ If your telephone line type is DTMF (Tone Dial), go to step **5**.
- After your line is connected to the remote facility, if your telephone line type is Pulse Dial, press the [\*] key on the ten key pad.

A dot appears in the display.

**U** Input the digits that you need to use the remote facility. After you

have finished your business with the remote facility, hang up.

#### 🖉 Note

□ Do not press the **[Start]** key.

# Rejecting messages from senders who don't identify themselves

Your fax machine can reject incoming messages lacking an identifier signal. Follow the user parameter procedure on to enter these settings.

Switch 05, bit 1

- 0: Accept such messages
- 1: Reject such messages

# Rejecting or accepting messages from specified senders (Authorized Reception)

This feature is called Authorized Reception. It helps you reject junk fax mail.

It lets you specify which terminals you wish to receive fax messages from; all others will be shut out.

## **About Authorized Reception**

- You must specify a list of senders (function 81). See P.54 "Entering A List Of Senders To Treat Differently (Function 81)".
- ② You must turn Authorized Reception on (function 62). See P.53 "Switching authorized reception on / off (Function 62)".
- ③ You must set your machine to accept or reject messages from senders in that list (user parameters, switch 08, bit 2 and 3; see P.114 "User Parameters").

If you accept them, the general public will not have access to your fax machine. You accept messages only from a group of people you know.

If you reject them, everyone will be able to send you messages except the people in the list. This is useful to reject the junk fax mail.

You can store up to 30 identifications with this feature. You can program part of an identification and accept (or reject) messages from all senders whose identification contains that part. See P.62 *"Wild Cards"*.

## Entering A List Of Senders To Treat Differently (Function 81)

How to enter a list of senders to treat differently, see P.54 "Entering A List Of Senders To Treat Differently (Function 81)"

## Switching authorized reception on / off (Function 62)

Before you use Authorized Reception, you have to switch the feature on.


Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [6] [2] and the [Yes] key.

Y/NEXT⊮ SELECT LINE

2 Press ► until the screen is as shown.

Y⁄NEXT► AUTHORIZED ON/OFF

Press the **[Yes]** key.



- Press ◄ or ► to change the on or off setting.
- **5** Press the **[Yes]** and **[Function]** keys.

## Entering A List Of Senders To Treat Differently (Function 81)

You can enter a list of up to 30 identifications (RTI, CSI and Wild Cards) for senders you wish to treat differently. For instance, for each identification in the list, you have the following options.

- Authorized Reception: You can accept their calls and reject all others (or vice-versa) with the Authorized Reception setting (See P.53 *"Rejecting or accepting messages from specified senders (Authorized Reception)"*).
- Specified Cassette Selection: You can choose to print their messages from the specified cassette.

## Programming the list of senders (Special Senders)

Press the [Function] [6] then enter access code [2] [2] [2] [2]. Then press [8] [1] and the [Yes] key.

SETTING? Y/4 PRINT LIST4/SEARCHD

#### 🖉 Note

□ At this time, you can print a Programmed Special Numbers List by pressing ◀ and the **[Start]** key.

### **2** Press the **[Yes]** key.



Enter RTI or CSI using the Quick Dial key and the ten key pad.




#### 🖉 Note

□ Example: XYZ COMPANY

#### P Reference

How to enter the characters, see P.122 "Entering Characters".

## Press the **[Yes]** key.



**5** Either:

Store this RTI as a wild card

The Yes key.

#### Otherwise

The [No] key.

 G Select whether you set this RTI/ CSI as the special terminal for authorized reception using ▶ or ◄. (if yes: ON, if no: OFF)



**2** Press the **[Yes]** key.



## 8 Either:

To program another special terminal

● Go to step 8.

To finish

The [Function] key.

Hints for programming the special senders

You must specify the sender's identification code (their CSI or RTI, see P.135 *"Initial Settings & Adjustments"*) which could be a little different from their phone number.

To get the other party's identification, call and ask for their CSI or RTI code.

Explain that you need the number programmed into their fax machine for identification purposes. Or, attempt a communication with their fax machine and print out a Journal report (function 41, see P.64 "Journal (Function 41)"). Read the identification under the RTI or CSI heading of the report.

## Editing the RTI/CSI for the special terminals

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then, press [8] [1] and the [Yes] key.

SETTING? Y/4 PRINT LIST4/SEARCH 2 Press ► to scroll through the list. When RTI/CSI you want to change appears, press the [Yes] key.

RTI/CSI CHANGE? Y/ () XYZ COMPANY

Edit the RTI or CSI and press the [Yes] key.

RTI/CSI ABC Y/N XYZ COMPANY

4 Either:

RTI/CSI Y/N STORE AS WILD CARD?

Store this RTI as a wild card

The **Yes** key.

Otherwise

The [No] key.

 Select whether you set this RTI/ CSI as the special terminal for Authorized reception using ▶ or
 ▲ (if yes: ON, if no: OFF)

SET	AUTHORIZED	Y∕ ∯•
▶ON	OFF	

**6** Press the **[Yes]** key.

RTI/CS	Ι	ABC	4

55

## **7** Either:

To edit another special terminal

**1** Go to step **2**.

To finish

• The [Function] key.

#### Erasing the special terminal

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [8] [1] and the [Yes] key.



Press ► scroll the RTI/CSI. And the RTI/CSI you want to change appears, press the [Yes] key.

RTI/CSI CHANGE? Y/ () XYZ COMPANY

- **B** Press the **[No]** and **[Yes]** key.
- Press the **[Function]** key.

## Forwarding

Using this feature, you can send fax messages coming in from certain locations on to another fax machine. The terminals that receive your forwarded messages are called "forwarding terminals".

If other fax machines in your organization have this feature, you can use Forwarding to set up distribution chains for incoming fax messages.

To set up Forwarding, program your machine as follows:

- Program the phone numbers of the Forwarding Terminals that you will pass on messages to, together with the list of specified senders for each number (Function 82).
- Specify the senders whose messages you want to forward (Ask the sending party what their RTI/CSI is. Or make a communication with that terminal, print a Journal and read off the RTI/CSI).

If the other party is using a machine made by another maker, they may not be familiar with the terms RTI or CSI. Explain that you are interested in the telephone number that they stored in the machine for identification purposes (Function 82).

- Switch the Forwarding on (Function 62).
- Select the messages to forward (Function 63).
  - All messages from specified senders.
  - All messages except those from specified senders.
- Decide whether you want your machine to automatically print

messages that it forwards (Function 63).

• Select whether or not your machine transmits a forwarding mark to be printed at the other end on the top of each page of the printout (Function 63).

#### Limitation

□ If the RTI/CSI of the machine sending you a fax is not the same as any of those that you have programmed into this feature, the message will not be forwarded.

#### 

RTI and CSI: see P.135 "Initial Settings & Adjustments".

Journal: see P.64 *"Journal (Function* 41)".

Wild Cards: see P.62 "Wild Cards".

## Programming the forwarding feature

This section shows you how to set up your machine to forward incoming fax messages to another location or locations.

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [8] [2] and the [Yes] key.

SETTING? V/ DRINT LIST 4/SEARCH

To print a list

Press the **[Yes]** key.



Store a forwarding station number.



#### 🖉 Note

- Example: [2] [1] [2] [5] [5] [5] [1] [2] [3] [4]
- □ If your machine is behind a PBX, add the access code before the number, unless this forwarding station is an extension connected to the same PBX as your machine.

#### Press the **[Yes]** key.

Press the [Yes] key to input RTIs or CSIs of certain senders to be forwarded to this station.

RTI/CSI	ABC	4

#### 🖉 Note

Messages from senders other than these RTIs or CSIs will not be forwarded to this station.

If you wish all incoming messages to be forwarded to this station

#### Press the [No] key.

FORWARD SET RTI/CSI?

#### 🖉 Note

Do not store any RTIs/CSIs for it.

77N

## 2 Go to step 🛙 .

### **6** Type in an RTI or CSI.

RTI/CSI ABC Y/N XYZ COMPANY

#### Reference

How to enter characters, see P.122 "Entering Characters".

**7** Press the **[Yes]** key.



Press the **[Yes]** key to store this RTI as a wild card.

FORWARD Y/N SET RTI/CSI?

Otherwise

Press the [No] key.

**9** Press the **[No]** key.

If you want to store another RTI/ CSI

Press the [Yes] key and go back to step 3.

To store another forwarding station

Press [No] and go to step **B**.

Press the [Function] key.

## Editing the forwarding feature

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [8] [2] and the [Yes] key.



2 Press ▶ until the forwarding station number you wish to edit appears. Then press the [Yes] key.



To erase this forwarding station's number and all RTIs/CSIs stored with it

Press the [No] key.



**2** Press the **[Yes]** key to erase.

**3** Press the **[Function]** key to finish.

If you change the forwarding station's telephone number

• Edit this forwarding station's telephone number.



**2** Press the **[Yes]** key.

If this forwarding station's telephone number is correct

### Press the **[Yes]** key.

Press the **[Yes]** key to change the RTI/CSI.



If you don't change the RTI/CSI

- Press the [No] key and go back to step 2 to edit another forwarding number.
- 4 Change the RTI/CSI.

To edit RTI's/CSI's allocated to this number

● Press ▶ until the RTI/CSI you wish to edit appears.

RTI/CSI CHANGE? Y/ () XYZ COMPANY

To add RTIs/CSIs to this number

Input an RTI/CSI and press
 [Yes]. Then go to step 6.

RTI/CSI ABC Y/N XYZ COMPANY

Press the [Yes] to edit or delete the RTI/CSI.

If you edit the RTI/CSI

• Edit the RTI/CSI.



Press the [Yes] key. Then go to step 6.

#### If you delete the RTI/CSI

#### Press the [No] key.

#### ∰Important

 If you delete all the RTIs and CSIs for a forwarding station, you must also delete the forwarding station (see step 2). If you do not do this, all incoming messages will be forwarded to that station.

Press the [Yes] key. Then go back to step 4.

# Press the [Yes] key to store it as a wild card.

V/N FORWARD SET RTI/CSI?

Otherwise

Press the [No] key.

Press the [Function] key to finish.

Edit or input another RTI/CSI for this forwarding station:

● Press the **[Yes]** key and Go to step **[**].

To work on another forwarding station:

Press the [No] key. Go to step2.

#### Important

If you switch the forwarding on and program no RTI/CSI, all incoming messages are forwarded.

# Switching forwarding on / off (Function 62)

Before you use Forwarding, you have to switch it on using Function 62. If it is switched off, the machine will not forward any incoming fax messages.

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [6] [2] and the [Yes] key.

Y/NEXT≱ SELECT LINE

2 Scroll through the list of features with ▶ until the screen is as shown.

Y/NEXT⊮ FORWARDING ON/OFF

- Press the **[Yes]** key.
  - FORWARDING Y/ **\*** ON **\***OFF
- Change the on/off setting by pressing ◀ or ►.
- Press the **[Yes]** key.
- **(**) Press the **(Function)** key to finish.

# Selecting which messages to forward

To choose which messages are forwarded, adjust bit 7 of switch 8 with the User Parameters. Two settings are available.

• Forward all incoming messages from specified senders (bit 7=0).

• Forward all incoming messages except those from specified senders (bit 7=1).

(See P.114 "User Parameters").

# Switching local printing on / off

You can choose whether your machine prints copies of messages that it forwards (by default, these messages are not printed). To change this setting, adjust bit 6 of switch 11 with the User Parameters:

- Bit 6=0 : Do not print
- Bit 6=1 : Print

(See P.114 "User Parameters").

# Enabling and disabling the forwarding mark

The forwarding mark is printed at the receiving end on the top of each page of the fax messages that are forwarded from your machine. This mark will help the operator at the other end to recognize messages that have been forwarded. If you wish, you can switch this mark off.

To switch the Forwarding Mark on or off, adjust bit 1 of switch 2 with the User Parameters:

- Bit 1=0 : Forwarding mark off
- Bit 1=1 : Forwarding mark on

(See P.114 "User Parameters").

## Wild Cards

This feature greatly enhances the effectiveness of the following features:

- Authorized Reception
- Forwarding

In each of these features, you have to store the RTI or CSI of various terminals that you normally receive fax messages from. Then, when your machine detects an incoming call, it checks the RTI or CSI of the other terminal, and acts accordingly.

When you program RTI's for these features, you can program wild cards to greatly expand the number of terminals that you can specify.

For example, if you wish to accept messages from all 150 branches of XYZ Company (using Authorized Reception), and forward them on to head office (using Forwarding), you don't have to store the RTI of each branch of XYZ Company. Program "XYZ" as a wild card for each of these functions. If the RTIs of all XYZ branches contain an "XYZ" somewhere in the RTI, messages coming in from them will be accepted, and sent on to head office.

#### 🖉 Note

This feature cannot recognize spaces. If you store MAN as a wild card, and a terminal with an RTI that includes MANCHESTER, HUMAN, or HUMANE calls you, your machine will recognize MAN as a wild card and accept and/or forward the message.

### 

Authorized Reception: see P.53 *"Rejecting or accepting messages from*"

specified senders (Authorized Reception)".

Forwarding: see P.57 "Forwarding".

RTI and CSI: see P.135 "Initial Settings & Adjustments".

## **Receiving Options**

As receiving options, the Reverse Order Printing is available.

## **Reverse Order Printing**

Normally, the machine prints the pages of received messages in the order that they were received uncollated.

However, with Reverse Order Printing, the machine will collate the sequence by printing the message from the last page first collated. This will make it easier to distribute the received fax messages, and more convenient for reading them.

#### Preparation

Reverse Order Printing will not take place unless you switch it on beforehand.

To switch this feature on or off, see the User parameters. (see P.114 "User *Parameters*").

## **Reports You Can Printout Yourself**

You can print these reports at any time by following the steps below.

## Journal (Function 41)

In addition to the automatic output of this report, which we've described earlier, you can print the Journal at any time.

- Press the [Function] [4] [1] and the [Yes] key.
- **2** Press the **[Start]** key to print out the report.

## File list (Function 42)

This is a list of memory transmission, memory reception, polling files still in memory and confidential reception. It gives information about each stored file, such as the fax numbers, start time, and status.

- Press the [Function] [4] [2] and the [Yes] key.
- Press the [Start] key to print out the report.

# Telephone number list (Function 43)

You can obtain a list of all the phone numbers stored in the machine. (You can also obtain a list of stored numbers as you edit them. See P.25 "Storing & Editing Fax Numbers (Functions 31 & 32)" P.28 "Storing & Editing A Group Of Fax Numbers (Function 33)" Press the [Function] [4] [3] and the [Yes] key.

ALL LISTS? START/N QUICK/SPEED/GROUP

To print all the numbers (Quick Dial, Speed Dial, and Group numbers)

Press the [Start] key. Then press [Function] key and skip the following steps.

Three lists will come out.

To print the Quick Dial list

Press the [No] key.

SELECT LISTS Y/N QUICK DIAL LIST?

**2** Press the **[Yes]** and **[Start]** keys.

START

To print the Speed Dial list

Press the [No] key.



**2** Press the **[No]** key.



**3** Press the **[Yes]** and **[Start]** keys.

START

To print the Group list

• Press the [No] key.



**2** Press the **[No]** key.

SELECT LISTS Y/N SPEED DIAL LIST?

**3** Press the **[No]** key.



**4** Press the **[Yes]** and **[Start]** keys.

START

## Program List (Function 44)

This list shows the counters programmed as keystroke program with the Function 34.

- Press the [Function] [4] [4] and the [Yes] key.
- **2** Press the **[Start]** key to print out the program list.

# Saving Energy

To print a fax message your fax machine uses a heating roller to fuse the image to the paper. This roller must already be hot when the paper passes under it. To maintain a temperature high enough to permit proper fusing, electricity is consumed.

This facsimile is equipped with various energy saving modes to reduce the consumption of electricity while the machine is waiting for a fax message.

#### Energy Saving Standby mode

Letting the heating roller cool to room temperature will reduce the amount of electricity the fax machine consumes. However, the fax machine will not print incoming messages right away, it will store them in memory and print them out after the roller warms up.

#### Fax Standby mode

Letting the heating roller cool halfway reduces the amount of electricity the fax machine consumes, but not as much as letting it cool to room temperature. On the other hand, since warming up takes only a short time, incoming fax messages can be printed right away.

#### 🖉 Note

- □ If your fax machine enters saving energy mode, no message appears on the display.
- □ You can still send a fax while the machine is in saving energy mode.
- □ The saving energy mode is related to the Power Saver. See P.68 "Saving Energy With The Power Saving Timer".

# How to start the saving energy mode

Your machine will enter the saving energy mode when machine is not used for 5 minutes.

#### 🖉 Note

If you want to change the five minute period to one or three minutes, or if you do not want your machine to enter the saving energy mode automatically, please contact your service representative.

# How to exit the saving energy mode

Your machine exits from the energy saving mode when a fax is received or you set the document. (If the power Saver is on, the message will printed out after the Power Saver ends.)

You can also carry out some functions (e.g. programming) by first holding down a key to switch to standby mode. If the roller the room temperature, only the energy mode key is available to exit the saving energy mode.

# Which saving energy mode is best for you?

You have two choices: You can let the roller cool to room temperature or you can let it cool to the midpoint. To choose which of the two settings you would prefer, set the user parameter switch. When you allow the roller to cool to room temperature, energy savings are at a maximum and printing will take a little longer since the roller will take more time to come to printing temperature. When you select the midpoint, some energy savings will still be achieved and printing will occur more rapidly.

#### Switch 05 bits 6

- Letting the heating roller cool to room temperature: Bit 6 at 0.
- Letting the heating roller cool halfway: Bit 6 at 1.

## Saving Energy With The Power Saving Timer

You can set sleep time to let the machine go to saving energy condition and set the wake up time when it returns to standby mode the next morning. During this Power Saver mode, a fax message received is stored in the memory and will be printed automatically the next morning after the wake up timer is activated.

As a typical example, you could program the heating element inside the printer to stay off at night and over the weekend. (You can program different settings for every day of the week.)

To use the Power Saving timer, you must:

- Program the timers for each day of the week.
- Switch the Power Saving timer feature on.

# Setting the Power Saving time (Function 71)

#### 🖉 Note

□ While the Power Saving timer is active, all incoming calls are refused if the memory fills up.


## ¥Example:

For Tuesday, set the Power Saving timer to switch the heater on at 9 am and off at 6 pm.

Press the [Function] [6] then enter access code [2] [2] [2] [2]. Then press [7] [1] and the [Yes] key.

SET	TIMER	Y∕N⁄ ♣▶
SUN		

2 Use ◀ and ► to scroll through the days of the week.



#### 🔗 Note

- □ Example: Press ► twice to go to Tuesday.
- Press the [Yes] key

TIMER#1 TUE \*/#/Y ON FROM 00:00

To change the ON to OFF, or the other way round, press the [\*] or [#] keys.


#### 🖉 Note

- □ There are two timers for each day, each with an ON/OFF setting. "ON" means that the heater will switch on at the time indicated. "OFF" means that the heater will switch off at the time indicated.
- Press ▶ to move the cursor under the time.

#### [] Input the time (9:00) : Press [0] [9] [0] and [0] from the key pad.

TIMER#1 TUE KPAD/Y ON FROM 09:00

## **2** Press the **[Yes]** key.



### 🖉 Note

- □ Repeat step **5** to **6** for the second timer (18:00)
- ☐ If you want the heater on all day, set both timers to ON = 00:00. If you want the heater off all day, set both timers to OFF =00:00.
- Press the [Yes] and [Function] keys to finish.

#### 🖉 Note

□ Go back to step **B** to program the timer for another day.

## Switching the Power Saving Timer on / off (Function 62)

The Power Saving timer feature must be switched on using Function 62.

Press the [Function] [6] then enter access code [2] [2] [2] [2]. Then press [6] [2] and the [Yes] key.

Y/NEXT)•

SELECT LINE

 2 Scroll through the list of features with ▶ until the screen is as shown. YZNEXT► POWER SAVER ONZOFF

## Press the **[Yes]** key.

POWER SAVER ON/OFF ON ▶OFF

4 Change the on/off setting by pressing ◄ or ►.

POWER SAVER ON∕OFF ▶ON OFF

**5** Press the **[Yes]** and **[Function]** keys to finish.


## Copying

If you need to make a copy of something, and there is no copier available, use your fax machine. Just place your original in the feeder, and press the **[Copy]** key.

#### 🖉 Note

By default, copies are made at Detail resolution. To change to Standard or Fine, press the Resolution key.

## **1** Place your original in the feeder.




## Press the [Copy] key.



# Input the number of copies that you need.

#### 🖉 Note

Example: 3 copies, press [3] of the ten key pad.



This machine makes copies in the order P1, P1, P2, P2 (for example when making 2 copies of a 2 page document).

### **4** Press the **[Start]** key.

# Calling To Request A Message (Polling)

Polling means "picking up" a document that has been left for you at a remote fax terminal.

### Limitation

Polling can only be used when both machines have the Polling feature.

### 🖉 Note

With polling, telephone line costs are charged to the person receiving the message (the Message Receiver).

# Picking up messages stored elsewhere (polling reception)

Use this feature when you wish to poll a message from another terminal.

## 🖋 Note

The maximum number of terminals that you can poll in one operation is 100.

### 

Groups: see P.28 "Storing & Editing A Group Of Fax Numbers (Function 33)".

Programming Keystrokes: see P.44 "Programming Keystrokes".

## **Operating procedure**

Press the [Function] [1] [1] and the [Yes] key.



## **2** Enter the Dial number.

POLLING RECV Y/START 2125551234

## Press the [Yes] key.

POLLING RECU Y/START 2125551234

#### 🖉 Note

□ If you want dial more number, go to step **2**.

Press the **[Start]** key.

## **Entering a Personal Code**

Press the [Function] [1] [1] and the [Yes] key.

POLLING RECU OPTION⊮ DIAL FAX NUMBER

**2** Press  $\blacktriangleright$ .

SET OPTION Y/> SET PERSONAL CODE?

## Press the **[Yes]** key.



Enter the password that you wish to use for this operation.

SET OPTION Y/N PERSONAL CODE:2567

#### 🖉 Note

□ Example: **[2] [5] [6] [7]** from the ten key pad.

## **5** Press the **[Yes]** key.

POLLING RECV OPTION⊮ DIAL FAX NUMBER

## **6** Dial and press the **[Start]** key.

#### Limitation

In theory, you can poll up to 100 different destinations using the above procedure. However, this number depends on how many numbers are currently waiting in memory to be dialed.

## **User Function Keys**

There are two Function keys (F1 and F2) on the operation panel.

You can program each of these keys with a feature that you wish to use frequently.

Store a User Function Code in the User Function Keys.

# Programming a User Function Code

You can program each of the User Function Keys with one of the following functions.

Code	Function
01	Journal
02	TTI ON
03	GROUP KEY
04	Dial Option
06	Forwarding

•F1 : Journal is default

To store a User Function Code, do the following procedure.

Press the [Function] [3] [5] and [Yes] key.

### 🖉 Note

 At this time, you can print a User Function List if you press
 [Start].



**2** Press one of the User Function Keys.

#### 🔗 Note

- □ Example: Press the **[F2] [Yes]** keys.
- □ If the key is already used, the currently stored code is displayed.

### Press the [Yes] keys.



Enter the two-digit code for the function that you wish to or search with ◀ or ► store.



#### 🖉 Note

Example: Group Dial key, press[03].

**5** Press the **[Yes]** key.

**6** Press the **[Function]** key.

## **Using a Function Program**

Press the [F1] or [F2] key.

**2** Use the function as normal.

## **Editing a Function Program**

Press the [Function] [3] [5] and the [Yes] key.



**2** Press the user Function key that you wish to change.



F2 CHANGE? Y/**4**) GROUP KEY

## Press the **[Yes]** key.



Press the [No] and [Yes] key.

**5** Press the **[Function]** key.

## **Deleting a Function Program**

Press the [Function] [3] [5] and the [Yes] key.



**2** Press the user Function key that you wish to erase.

NoteExample: [F2]



Press the **[Yes]** key.

F2			Y/N/ ♣
CODE	03	GROUP	KEY

- **4** Press the **[No]** key.
- **5** Press the **[Yes]** and **[Function]** key.

## **Dual Access**

Dual Access means that even if the machine is already carrying out a task, you may be able to operate the machine.

For instance, if your machine is currently receiving a long fax message, but you want to send a message and go back to your desk without having to wait by the machine, you can place your message in the feeder, select the required transmission features, dial the number, and press Start. Your message will be scanned and stored to memory while the machine is still receiving. This means that you can take your fax back to your desk before it is actually sent. However, to be sure whether your transmission was successful or not, keep an eye open for Error Reports (or check the Journal).

The following table shows which features can operate simultaneously on your machine.

	Job that you wish to carry out at the same time								
Job Currently in Progress	1	2	3	4	5	6	7	8	9
1. Storing to Memory	—	1	×	1	×	1	1	1	1
2. Printing from Memory	1	—	×	×	×	×	×	×	×
3. Copying	×	×	—	×	×	1	×	1	✓
4. Printing an Automatic Report	1	×	×		×	×	×	×	×
5. Immediate Transmission	×	×	×	×		×	×	×	×
6. Memory Transmission	1	×	1	×	×		×	×	×
7. Receiving and Printing a Fax	1	×	×	×	×	×		×	×
8. Receiving a Fax to Memory	1	×	1	×	×	×	×	—	×
9. Transmitting a Service Report	1	×	1	×	×	×	×	×	—

• ✓: Possible

• ×: Impossible


# 5. Maintaining Your Machine

# Loading Paper In The Main Cassette


## **1** Pull out the paper cassette and place it on a flat surface.

## 🔗 Note


□ Remove any paper that may have dropped inside the machine in the area vacated by the paper cassette.




**2** Lift up the cassette cover and remove it.




B Remove any remaining paper.




If the metal base plate is raised, push it firmly down until it locks into place.



**5** Prepare a stack of blank paper. For smoother operation, square the edges.




**6** Load the paper into the cassette.




## **2** Replace the cassette cover.

### Note

 $\Box$  The frosted side of the cover must be face up when closed.



**8** Replace the cassette. Push it in firmly until it locks into place.



## Replacing The Toner Cassette And Cleaning Pad


### 🖉 Note


- □ When the Add Toner indicator () starts to blink, the toner cassette is almost empty. You will make 100 more copies before you have to change the toner cassette.
- □ When the Add Toner indicator (上) remains lit, it is time to install a new toner cassette.

## **1** Pull the lower unit release lever towards you and open the top cover.

#### 🖉 Note

□ If you do not pull the lever, only the upper unit will open.







**2** Grasp the old toner cassette as shown, and lift it out carefully.

### A WARNING:


Do not incinerate waste toner. Toner dust may ignite suddenly when exposed to an open flame.



B Remove the old cleaning pad.




Install the cleaning pad a shown in the illustration.



## **5** Prepare the new toner cassette.

#### ∰Important


- $\Box$  Do not touch the green drum.
  - ① Remove the new toner cassette from its bag. Do not remove any paper or tape yet.
  - ② Hold the cassette horizontally and shake it gently from side to side a few times



**1** Hold the cassette as shown and rest it in the machine. Make sure it fits in the slots provided on either side.

#### Solution Note


□ The slots are marked with small arrows.




**2** Press down on the cassette until it locks into place.

### 🖉 Note

□ If you do not push the cassette right in, the top cover will not close.



## **8** Close the top cover.



### 🖉 Note

Background gray cast is sometimes evident on printed messages just after installing a new toner cassette.


## **Toner Cassette**

- Store in a cool, dark place.
- Never store where they may be exposed to heat.
- Keep out of the reach of children.
- Do not eat toner.
- Do not lay heavy objects on toner cassette.
- Do not incinerate toner or toner containers. Toner dust may cause flashback when exposed to an open flame.


# **Cleaning The Rollers And Scanner**

To maintain the machine's condition, clean the rollers and scanner from time to time.

## **1** Open the top cover.



## **2** Wipe the rollers.



- ① Wipe the white roller with a damp cloth. Roll it round with your fingers so that you can wipe the whole surface.
- ② Wipe the short four black rollers.
- ③ Wipe the two grey rollers. (1,8) Roll them round with your fingers so that you can wipe the whole surface.

### **3** Wipe the scanner. (6)

Close the top cover.


## Changing The Paper Size In The Paper Cassette

This example explains how to switch to letter size paper. To switch to other paper sizes, follow the same steps but move the end plate and side rails to the appropriate size mark on the cassette.


### 🖉 Note

□ Remove any paper that may have dropped inside the machine in the area vacated by the paper cassette.


## **1** Pull out the paper cassette and place it on a flat surface.




**2** Lift it up the cassette cover and remove it.




**3** Remove any remaining paper.



If this is the main cassette and the metal base plate is raised, push it firmly down until it locks into place.




**5** Squeeze the green end plate slightly and remove it.




5

**1** Insert the end plate into the letter slot as shown.




**2** Remove the side rail (Squeeze in one of the plastic tabs on the underside of the cassette to loosen it).



**B** Replace the side rail in the letter slots.


#### Note

□ There are two sets of slots and they are marked on the base. Make sure that the upper and lower tabs on the rail both fit in the inner set of slots.




## **9** Repeat steps **2** and **3** for the other rail.


**D** Remove the paper size plate located at the front of the cassette.




Replace the plate, orienting it so that the letter symbol is visible in the window at the front of the cassette.



Prepare a stack of blank paper. For smoother operation, square the edges.




## **E** Load the paper into the cassette.



### **E** Replace the cassette cover.

#### Note


□ The frosted side of the cover must be face up when closed.



**E** Replace the cassette. Push it in firmly until it lock into place.

### Note

□ It is a good idea at this time to check that the side rails have not dislodged while you were loading paper.




**D** Before you can use it, you must change the paper size setting for this cassette using function 36. See P.91 *"Changing The Paper Size Setting"* 

# **Changing The Paper Size Setting**

When you change the paper size loaded in the paper cassette, you need to change the paper size setting.

Press the [Function] [3] [6] and the [Yes] key. Alternatively, if the machine is in standby mode, just press the ≤ key.



2 Press the ◀ and ▶ keys to select the paper size loaded in the main cassette.

PAPER S		Y∕ <b>(</b> )
LETTER	(8.5X11	INCH)

B Press the [Yes] key.



Press the [Function] key to finish.

# 6. Troubleshooting

## If An Indicator Lights Up On The Operation Panel

- **PRESS STOP KEY appears in the display:** Press the **[Stop]** key.
- The Receive File indicator is lit:

You've received a fax message which is now stored in the machine. See P.19 *"Printing Received Messages That Have Been Stored (Substitute Reception)"* 

#### The Check Display indicator is lit:

Read the message on the display and check the descriptions listed on P.109 "Displayed Error Messages"

## **Other Possible Problems**

## You Want To Remove The Document In The Feeder

Open the document feeder (see P.95 "*Clearing a Document Jam*" ), then remove the document.

#### ∰Important

Do not pull out the document without opening the auto document feeder, or you will damage the scanning mechanism.


### **Clearing a Document Jam**

When an original is jammed, CLEAR ORIGINAL is displayed — follow this procedure to solve the problem.


#### 🔗 Note

□ If copies, fax message or prints are jammed, follow the next procedure.


**1** Open the top cover to an angle of about 45°.



### **2** Remove the original.



**B** Close the top cover.



6

### Clearing a Copy, Fax, or Print Jam


When CLEAR COPY is displayed, follow this procedure to solve the problem. For how to clear original jams, see the previous procedure.


#### Clear a Jam inside the machine

### **1** Pull the lower unit release lever towards you and open the top cover.


#### Solution Note

□ If you do not pull the lever, only the upper unit will open.







**2** Remove the toner cassette.




**B** Remove any jammed paper underneath.



### Replace the toner cassette.




### **5** Close the top cover.




6

#### Clear a Jam in the Cassette Entrance


**1** Remove the main cassette and place it on a flat surface.




### **2** Remove any paper from inside the machine.



**B** Push down the paper so that the base plate locks into place.




A Replace the main cassette.




### Clear a Jam in the Upper Rear Unit

### **1** Lift back the document table.





**2** Open the upper rear cover.




6

### **3** Pull out any jammed paper.







### If Messages You Receive Don't Fit On Your Paper

#### **Breaking Down Large Format Messages**

If the incoming document is longer than the paper in your fax machine, the machine will split it into multiple sheets. The tail end of the message will be reproduced at the head of the next page. The images overlap each other by 10mm. (You can ask a service technician to turn off the overlap.)

#### **Length Reduction**

If the incoming document is larger than the paper in the cassette, but still within the limits below, the machine can reduce it so that it will fit on one page.

Paper size in the cassette	Maximum reducible length
A5 🗗	190.1mm
A4	388.8mm
F4	433.2mm
Letter	365.2mm
Legal	467.0mm

### **Communication Problems**

If ERROR PRESS STOP appears in the display: Press the **[Stop]** key.

Causes:

- A poor line caused the communication to fail.
- The line is busy or noisy. Try to retransmit.
- The other machine is out of order. Ask the other party to check their machine.

# Adjusting the Printing Margins (Function 95)

Follow these steps if you wish to adjust the top and left margins on printed messages.

You can chose the site of margins in steps of about 0.5 mm.

#### 🖉 Note

- Do not change the margins too much, or no margin will be used and print quality might deteriorate.
- Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [9] [5] and the [Yes] key.

Y∕NEXT⊮

MAIN CASSETTE

- If the cassette whose paper margins you wish to adjust is not displayed, press the ▶ key until it appears.
- Press the **[Yes]** key. If the top margin is OK, go to step **[**.

TOP	MARGIN	Y∕N⁄ <b>4</b> ▶
	÷	+

4 Press the ◀ and ► key to adjust the size of the margin. The position of the asterisk indicates the current size.

TOP	MARGIN	Y/N/ ♣
	÷	+

**5** Press the **[Yes]** key. If the left margin is OK, go to step **2**.



**6** Press the **◄** and **▶** key to adjust the size of the margin. The position of the asterisk indicates the current size.

LEFT	MARGIN	Y/N/ ♣
	÷	+

Press the **[Yes]** key.

EFT MARGIN Y/N/**()** PROGRAMMED

If you wish to make a test print, press the [Start] key. To skip this, just press the [NO] key.

TEST PRINT

Press the [Function] key to return to standby mode.

START

6

### **Operating Difficulties**

Problem	Required Action
STANDBY MODE	
Nothing happens when the switch is turned on.	Check the power cord. Is it properly plugged into the outlet?
	Plug it in firmly.
SET DOC. OR DIAL NO. is not displayed.	Switch the power on. If the Power indicator does not light, check that the power cord is plugged in.
The display does not show the Ready condition, or the machine stops during an op- eration.	<ul> <li>Does CLEAR ORIGINAL or CLEAR COPY appear in the display?</li> <li>Clear the misfed paper.</li> <li><b>P Reference</b> See P.95 "Clearing a Document Jam" and P.96 "Clearing a Copy, Fax, or Print Jam".</li> </ul>
	Does ADD PAPERappear in the display?Load paper into the paper tray. See P.77 "Loading PaperIn The Main Cassette" .Does CLOSE COVERappear in the display?Close all cover.Is theAdd Tonerindicator on?Load a new toner cassette. See P.80 "Replacing The Ton- er Cassette And Cleaning Pad"

Problem	Required Action			
TRANSMISSION				
The original is not pulled into the auto document feeder.	You did not feed the document far enough into the feeder.			
	Insert the document into the feeder until it stops.			
	Retransmit.			
	Do user maintenance, especially rollers (1,8).			
	The telephone line is disconnected.			
	Check that the line is connected properly.			
	The telephone line type setting is incorrect.			
	Check the telephone line type setting (see P.137 "Set- ting The Phone Line (Function 62)" ).			
	The dialed number does not contain an PSTN access code or a pause.			
	Include the PSTN access number and a pause before the telephone number.			
	The dialed number did not have enough pauses be- tween the access PSTN number and the telephone number.			
	Try adding more pauses after the access PSTN code.			

Problem	Required Action
Frequent original misfeeds	Multifeeds
	Incorrect positioning of originals
	Put the document in the feeder correctly. See P.13 "Memory Transmission (Memory Indicator Lit)".
	Incorrect alignment of originals
	Align the edges of the document. See P.12 " <i>Page Con- dition</i> ".
	Curled pages
	Flatten the document. See P.12 "Page Condition".
	Incorrect document type
	Use a proper document type. See P.11 <i>"Recommended Types Of Document"</i> .
	Mixed document types
	The pages must all be of the same type.
	Static electricity on the originals
	Shuffle the document. See P.13 "Memory Transmission (Memory Indicator Lit)".
	User maintenance is needed.
	Do user maintenance, especially roller (1). See P.85 <i>"Cleaning The Rollers And Scanner"</i> .
	Non-feeds
	Copier silicone oil on the originals
	Wait a few minutes, then try again.
	Incorrect alignment of originals
	Align the edges of the document. See P.13 "Memory Transmission (Memory Indicator Lit)".
	Curled pages
	Flatten the document. See P.12 "Page Condition".
	Incorrect document type
	Use a proper document type. See P.12 " <i>Page Condi-tion</i> ".
	More than 30 pages in the feeder
	Do not place more than 30 pages in the automatic doc- ument feeder at once.
	User maintenance is needed.
	Do user maintenance, especially rollers (1,8). See P.85 <i>"Cleaning The Rollers And Scanner"</i> .

Problem	Required Action
Transmission cannot take	The document is jammed in the feeder.
place; CLEAR ORIGINAL appears.	Remove the jammed document (see P.95 " <i>Clearing a Document Jam</i> ") and repeat the transmission procedure.
	The document may be longer than the maximum limit (see P.6 "Copy Paper").
	Make sure that none of your originals exceed this limit.
	Do user maintenance, especially rollers (1,8) (see P.85 " <i>Cleaning The Rollers And Scanner</i> ").
Transmission cannot take	The other machine is out of order.
place.	Check the error report.
Before taking action, wait un- til the <b>Communicating</b> indi- cator goes out, then press the	Ask the other party to check their machine and correct the fault.
[Stop] key.	The line is busy or noisy.
	Check that the dial tone is sent out.
	Try to retransmit.
Consistent difficulty in com- municating with a particular	There are some bad lines between you and that other terminal.
terminal Consistent poor image quali-	Store that terminal's number as a Quick Dial Key or Speed Dial Code.
ty when communicating with a particular terminal	Then call a service technician. Inform the nature of the problem and give the Quick Dial Key or Speed Dial Code that you stored the number in.
RECEPTION	
The telephone keeps ringing	You are in TELmode.
and no fax is printed.	Change to AUTO or TEL mode (see P.17 "Receiving Telephone Calls & Fax Messages (Faxes/Phone Calls)").
	Power is switched off.
	Switch the power on.
RECEPTION/COPYING	· · · · · · · · · · · · · · · · · · ·
No printout; the Add Paper	The cassette is empty.
indicator is lit.	Add Paper (see P.77 "Loading Paper In The Main Cassette" ).
No printout; CLEAR COPY	The printer has jammed.
appears.	Clear the jam (see P.96 " <i>Clearing a Copy, Fax, or Print Jam</i> " ).

Problem	Required Action
Copies are blank.	The original must be placed face down in the docu- ment feeder.
	Position the original correctly. See P.13 "Memory <i>Transmission (Memory Indicator Lit)</i> ".
Copy paper misfeeds occur	Is the proper paper in the paper cassette?
frequently.	Paper size and weight must be within the standards set for this machine.
	Is folded, wrinkled, damp, or curled paper in the paper cassette?
	Always use dry, undamaged paper.
	Is the paper set properly in the paper cassette?
	Always load paper correctly. See P.77 "Loading Paper In The Main Cassette"
	Make sure that there is not too much paper in the trays; do not fill them up over the load limit mark.
	Are there any pieces of misfed paper or other foreign objects in the machine?
	Make sure that the paper path is completely clear of paper and other material after a misfeed.
	Are you copying onto recycled paper?
	Fan the stack of recycled paper and load it in the paper tray.
Stripes on copies.	The exposure glass is dirty.
	Clean the exposure glass (6). (see P.85 " <i>Cleaning The Rollers And Scanner</i> ").
TELEPHONING	
You can't receive phone calls;	You are in FAXmode.
the unit only rings once then goes into receive mode.	Change to TEL or AUTO mode (see P.17 "Receiving Telephone Calls & Fax Messages (Faxes/Phone Calls)").
You can't receive phone calls;	The telephone line is not connected.
the unit does not ring.	Connect the modular cord (see P.133 "Connecting Up To The Telephone Line" ).

### **Displayed Error Messages**

The following messages may appear while you are operating or programming the machine.

CHECK AUTO-DIALING	You cannot use the auto-dialer at the mo- ment. Use the ten key pad or the external telephone.
NO FILE EXISTS	No polling reception operations have been programmed.
	There are no messages in memory waiting for transmission.
	Incorrect file number. Check the file number and try again.
TOO MANY DEST.	The memory cannot hold any more tele- phone numbers. Either:
	• Delete some numbers then try again.
	• Wait until some of the Send Later or other delayed transmissions waiting in memory have been carried out, then try again.
USED AS GROUP	This Quick Dial Key has a Group stored in it.
USED AS PROGRAM	This Quick Dial Key has a Keystroke Pro- gram stored in it.
USED AS DIAL	This Quick Dial Key has a telephone number stored in it.
USED AS GROUP KEY	This Quick Dial Key is programmed as Group Key.
NOT PROGRAMMED	Either:
	• This Quick Dial Key or Speed Dial Code does not contain a number.
	• This Quick Dial Key does not contain a Keystroke Program.
ALREADY PROGRAMMED	Either:
	• This number is already included in this Group.
	• This RTI/CSI has already been stored for use with this feature.

PLEASE SET PAUSE	You must add a pause after your area code when you input your fax terminal's own telephone number.		
ADD TONER	The toner cartridge is empty. Install a new cartridge.		
CLEAR ORIGINAL	A document is jammed in the feeder.		
CLEAR COPY	Paper is jammed in the printer.		
CLOSE COVER	A cover is not closed properly. Check that all covers are closed.		
UNABLE USE PRINTER	Machine cannot print a list/file, because the heater is not warm enough or plotter is not ready.		
SERVICE CALL	Machine is out of order. Contact your service representative.		
USED AS DIAL OPTION	Dial Option feature is set in Quick 29.		
← CHECK PAPER SIZE	The size of the installed paper does not match the currently selected paper size.		
	Set the paper size P.91 <i>"Changing The Pa-</i> <i>per Size Setting"</i> or install the appropriate paper.		
IN USE	This Quick Dial is being used for (e,g, for a Send Later Transmission)		

### **Calling The Service Station**

The machine has a feature called Service Report Transmission. Use this feature when your machine is having problems. The machine will transmit information about the condition of your machine to your service representative. A technician will then be able to find out what the problem is before making a visit. Service Report Transmission is available when the fax number of the service representative has been programmed.

#### **Sending A Service Report**

When you need to send a service report, do the following.

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [7] [3] and the [Yes] key.



**2** Press the **[Start]** key.

5551234 DIALING

#### 🖉 Note

□ If the transmission was not successful, the machine will not redial. You must repeat the operation. Program your machine's own telephone number in order for your service representative to identify the sender of the service report. (see P.135 *"Initial Settings & Adjustments"*.)

6

# 7. Technical Reference

### Access Code For Functions 61 To 95

Accessing functions 61 to 95 requires an access code.

The sole purpose of this feature is to keep others from accidentally misadjusting the machine. This code cannot be changed, so do not rely on it as a security feature.

The code is 2222

### **User Parameters**

Adjusting your machine sometimes requires that you change special settings called user parameters. For each user parameter, you must change a bit in a switch.

A switch has eight bits. Each bit has a value of 1 or 0, and each bit is numbered 0 to 7 from the right.

#### Bit values and Bit numbers

Bit value	0	1	0	0	0	0	0	0
Bit number	$\downarrow$							
	7	6	5	4	3	2	1	0

In the following example we'll change bit 3 of switch 05 in the user parameters.

## Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then press [6] [3] and the [Yes] key.

You'll get the display.


#### 🖉 Note

□ You can press the **<**key to see a list. Otherwise, press the **[Yes]** key.

#### **2** Press the **[Yes]** key again and use **◄** and **▶** to change switches.

#### 🖉 Note

□ For example go to switch 05 by pressing ► five times.



#### **E** To change bit 3, press **[**3**]** on the ten key pad.

Bit 3 will change from 1 to 0 or from 0 to 1.

		KPAD/Y/∢
SWITCH	05	:1000 1001

#### 🖉 Note

□ To change bit 0, press **[0]** to change bit 1, press **[1]** and so on.

Press the [Yes] and [Function] keys.

#### $\widehat{\mathbf{V}}$ List of all relevant user parameters

Many bit settings have no effect and are not listed. (Never change these).

. . . . . . . . . . . . . . . . . . .

SW	Digits & Definition	Settings
00	0, 1, 2 and 3	Do not change these set- tings
	4, 5: Default resolution when you send a message RESOLUTION HALFTONE	Bit: 4, 5 STANDARD: 0, 0 DETAIL: 1, 0 FINE: 0, 1 HALFTONE: 1, 1
	6: Default setting for transmission TRANSMISSION MODE	Memory: 0 Immediate: 1
01	7: Clear modes after sending a fax. RETURN TO HOME POSITION	Off: 0 On: 1
02	0: Mark to be printed at the receiving side to distinguish messages that are sent from you machine when it is acting as a forward- ing station. FORWARDING MARK	Off: 0 On: 1
	3: Printing the sender's TSI on a receiving message TSI PRINT	Off: 0 On: 1

SW	Digits & Definition	Settings
03	0: Automatically print memory transmis- sion reports. COMMUNICATION RESULT REPORT (MEM- ORY TX)	Off: 0 On: 1
	2: Automatically print storage reports for memory transmission. FILE RESERVE REPORT (MEMORY TX)	Off: 0 On: 1
	4: Automatically print polling reception reports. COMMUNICATION RESULT RE- PORT (POLLING RX)	Off: 0 On: 1
	5: Automatically print immediate transmis- sion reports. TRANSMISSION RESULT REPORT	Off: 0 On: 1
	7: Automatically print communication reports. JOURNAL	Off: 0 On: 1
04	0: Printing the Confidential File Report CONFIDENTIAL FILE REPORT	Off: 0 On: 1
	7: Include the first half of the first page with reports? INCLUSION OF PART OF IMAGE	Off: 0 On: 1
05	0: Store incoming faxes when machine is out of supplies. SUBSTITUTE RECEPTION	Off: 0 On: 1
	1: Allow automatic reception from senders that do not identify themselves. CONDITIONS OF MEMORY RECEPTION	Accept (Free): 0 Reject (If no RTI/CSI re- ceived): 1
	6: Level for the Energy Saving feature ENERGY SAVING	Bit: 6 Heater off: 0 Heater half cool: 1
06	0: Default Setting for sending a header with each page. TTI	Off: 0 On: 1

SW	Digits & Definition	Settings
08	2,3: AUTHORIZED RECEPTION	Bit
	(Can also use function 62)	2 3:
		0 X: Off
		1 0: Receive messages only from senders whose RTI/ CSIs are programmed.
		1 1: Receive messages only from senders whose RTI/ CSIs are not programmed.
	6,7 FORWARDING	Bit
		6 7:
		0 X: Off
		1 0: Forward messages only from senders whose RTI/ CSIs are programmed
		1 1: Forward messages only from senders whose RTI/ CSIs are not programmed
10	0: Reverse order Printing	Off: 0
		On: 1
	7: Use dithering halftone (SPD) or standard	STD: 0
	halftone (STD)	SPD: 1
	HALFTONE METHOD	
11	6: Print the received message when it is act-	Off: 0
	ing as a forwarding station	On: 1
13	0, 1: Access to the public telephone line	Bit: 0, 1
		Loop Start: 1, 0
		Ground Start: 0, 1
		Flash Start:1, 1
		PSTN:0, 0

. .

. . . . . .

. . . . . . . . . . . . . .

#### **User Parameter Hints**

#### Changing your machine's default settings

These are the settings your machine assumes immediately after it is turned on, after clearing the machine, or after you or the power saving reactivates it. Many of the user parameters determine your machine's default settings.

#### Clear modes after sending or loading a fax message (Switch 01, bit 7)

Your machine can either reset itself or keep its settings (for a few minutes) after it sends a fax message.

#### Automatic reports

Many types of automatic reports can be switched on or off. See  $\Rightarrow$  P.41 "*Automatically printed reports*" for details.

#### Accepting messages when out of supplies (Switch 05, bit 0)

This is also called substitute reception. You can accept messages even when out of toner or paper by storing them in memory. See P.19 "*Printing Received Messages That Have Been Stored (Substitute Reception)*"

# Adjusting The Volume Of Various Features (Function 92)

You can change the beeper (monitor) volume of the desired feature.

TRANS MONITOR	Beeps to signal transmissions.
RECV MONITOR	Beeps to signal receptions.
ONHOOK MONITOR	Beeps to signal on hook dialing.
DIAL MONITOR	Beeps when a number is dialed.
BUZZER	Beeps (doesn't buzz) to signal something going amiss.
KEY	Beeps when a key is pressed.

Press the [Function] [6] then enter the access number [2] [2] [2] [2]. Then press [9] [2].


ADJUST	MENT	Y∕NEXT <b></b> ▶
92	ADJUST	VOLUME

**2** Press the **[Yes]** key.

Adjust the transmission monitor volume with *◄* and *▶* and press the [Yes] key when you're done.



Adjust the reception monitor volume with ◀ and ▶ and press the [Yes] key when you're done.



• Adjust the on hook monitor volume with ◄ and ► and press the [Yes] key when you're done.



**6** Adjust the dial monitor volume with **◄** and **▶** and press the **[Yes]** key when you're done.

DIAL	MONITOR	Y.\ ₽
MIN 🕨	▶▶ MAX	

**2** Adjust the BUZZER volume with *◄* and *▶* and press the **[Yes]** key when you're done.

BUZZER	Y∕N/ <b>4</b> ▶
MIN ÞÞÞ	MAX

Adjust the KEY volume with ◀ and ▶ and press the **[Yes]** key when you're done.

KEY		Y/N/ ♣
MIN	<b>ի ի ի</b>	MAX

Press the [Function] key to return to standby mode.

# Selecting The Display's Language (Function 93)

If you would rather use another language for messages and displays, follow the procedure below.

Press the [Function] [6] then enter the access number [2] [2] [2] [2]. Then press [9] [3] and the [Yes] key.

SELECT LANGUAGE Y/4

2 Use ◀ and ► to scroll through the available languages.

SELECT LANGUAGE Y/ **()** FRENCH

Press the [Yes] and [Function] key to return to the ready state.

### **Entering Characters**

Use the ten key pad for entering numbers. Use Quick Dial keys 1 to 26 for entering letters, the  $\blacktriangleleft$  and  $\triangleright$  keys to change to another letter, the **[Yes]** key to accept a character, and Quick Dial key 27 for spaces and Quick Dial key 28 for other characters.

#### **Entering Symbols**

Press [28] of the Quick Dial key.

**2** Press  $\triangleleft$  or  $\triangleright$  to scroll symbols.

#### 🖉 Note

□ You can enter the following symbols. & \$ ! " # % ' ( ) \* + , . / : ; < = > ? @ [ ¥ ] ^\_\_

Press the **[Yes]** key.

#### **Entering Numbers**

**1** Enter numbers using the ten key pad.

### **Document & Paper Specifications**

# Documents (Using The Auto Document Feeder)

- Length: 105mm – 600mm
- ♦ Width: 148mm – 218mm
- Thickness: 0.05 – 0.2mm

#### Document Feeder Requirements

- Do not insert torn, heavily curled, wavy, creased, dog-eared, damp, or otherwise damaged documents. Make copies of these originals and scan the copies.
- Do not insert folded, stapled, clipped, glued, or taped documents, or documents with a metallic coating. Make copies of these originals and scan the copies.
- Do not insert documents on which there is undried ink or correction fluid. Wait for the document to dry.
- If the document has an uneven or slanted edge, do not insert that edge in first.

#### **Paper Requirements**

• Do not print to torn, heavily curled, wavy, creased, dog-eared, damp, or otherwise damaged paper.

- Do not print to folded, stapled, clipped, glued, or taped paper.
- Do not print to paper with any kind of coating or printing. Do not print to metallic paper. Do not print to the reverse side of a print.

### Capabilities

#### Stored Numbers (Long Term)

- 30 Quick Dial keys, each of which can hold an individual number. Any five of the Quick Dial keys can hold a group of numbers.
- 50 individual numbers stored as two-digit Speed Dial codes (see P.25 "Storing & Editing Fax Numbers (Functions 31 & 32)" ).
- Five groups, each of which can hold up to 100 destinations.
- 30 CSI or RTI codes (possibly used as wild cards) for authorized reception or cassette selection.

#### **Stored Destinations**

Up to 100 destinations can be set at any one time. (Ex: message A to 25 destinations, message B to 30, message C to 20 message D to 24 and finally one immediate transmission job you're programming in now. Total: 100)

#### File Storage

You can have as many as 100 memory transmission files stored in the machine: This is a theoretical maximum. The actual number of files you can have in your machine depends on the types of the documents, and how much memory they consume.

### **Specifications**

#### **Base Machine**

Power supply: 220-240Vac, 50/60 Hz

#### Power consumption:

Energy saver mode: Average 2 W Standby mode: Average 25 W Transmission: Average 42 W Reception: Average 280 W Copying: Average 370 W Maximum power consumption: 500 W

#### Protocol:

G3

Memory Capacity:

- 40 pages/A4 size
- With 1Mbyte memory: 120 pages

#### Transmission time:

3 seconds at 28,800 bps, G3, without TTI, ECM, MMR- using memory for a ITU-T #1 test document (Slerexe letter) at standard resolution

#### Data compression:

MH, MR, MMR, SSC

#### Modem Speed:

33,600/31,200/28,800/26,400/ 24,000/21,600/19,200/16,800/ 14,400/12,000/9,600/4,800/2,400 bps.

#### Scanning resolution:

- Standard: 8 × 3.85 lines/mm
- Detail: 8 × 7.7 lines/mm
- Fine: 8 × 15.4 lines/mm (Transmission only)

- Paper cassette capacity: 250 sheets (80g)
- ◆ Paper Size: A4, A5 □ ( Adjustable to Letter, Legal, and F4 )
- Dimensions (W × D × H): 339 × 316 × 260 mm <sup>\*1</sup>

#### ✤ Weight:

12.5 kg \*1

<sup>\*1</sup> exclusive of option

## 8. Installation

### **Before Installation**

Before installing your machine, read the safety instructions at the beginning of this manual. To install the machine, follow these procedures:

- Find a suitable location for the machine.
- ② Remove all the pieces of tape attached to the machine.
- ③ Install the toner cassette. (see the seperate booklet containing the installation procedure.)
- ④ Attach the accessories and load the paper in the paper cassette. (see the seperate booklet containing the installation procedure.)
- ⑤ Connect the phone line. (see P.133 "Connecting Up To The Telephone Line".)
- © Connect the power. (see P.134 "Connecting The Power And Switching On".)
- ⑦ Enter all necessary information and settings in your machine's memory. (see P.135 "Initial Settings & Adjustments".)

### **Machine Environment**


When choosing a location for your machine, please follow the safety instruction given on the first section.

#### Location

For the best possible performance, install your machine in a place which satisfies the following conditions.

- Not exposed to direct sunlight
- Well ventilated (air turnover at least three times per hour) ; to avoid the build-up of ozone, make sure to locate the machine in a large well-ventilated room which has an air turnover of more than 30 m<sup>3</sup>/hr per person.
- Level
- Not subject to vibration
- Away from other electronic equipment, to avoid interference
- Away from areas containing corrosive gas
- Dust-free
- Condensation-free
- Temperature 15 to 25°C
- Humidity 30 to 70 % RH (do not install near a humidifier)
- Away from heaters and air conditioners, to avoid sudden changes of temperature
- Within 5 meters of a three-pin grounded power outlet (220–240 Volts, 50/60 Hz)


• With the clearance as shown



This machine generates a certain amount of ozone. Although the amount generated is within safety requirements, it is recommended that, to avoid ozone buildup, you install the machine in a room which is properly ventilated.


### **Ventilation Grill Direction**

You can adjust the ventilation grill direction so that air is blown downwards or to the rear of the machine.




### Installing The Optional Memory Card

### **1** Turn off the power switch.



**2** Remove the cover from the front right of the machine.




8

## B Hold the card in the way shown (pay attention to which side is printed) and insert it carefully into the slot.

#### A CAUTION:


Insert the Memory Card firmly or the machine may not work properly.



**4** Turn the power switch on.

# **Connecting The External Telephone**

**1** Plug the handset jack into the "TEL1" socket at the rear of the machine.



## **Connecting The Machine**

Before using the machine, connect the machine to the telephone line properly. Then plug in the power cable and switch on.

Make sure the machine is properly connected to the telephone line and the power outlet, as shown following.

Do not switch on until everything is connected properly.


Program the Telephone Line Type setting (use Function 62; see P.137 "*Setting The Phone Line (Function 62)*"). If your telephone normally sends out tones (touch tone) when dialing, use the TT setting; if it normally sends out pulses (rotary dial), use the DP setting. Also, make sure that the switch on the handset is set up correctly.

# **Connecting Up To The Telephone Line**

There are similar sockets located at the rear of the machine:

- TEL1: For the handset option or external telephone
- LINE: Telephone line connection

**1** Insert the line cable into the socket labeled "LINE".



### **2** Connect the other end to your telephone line.

### ∰Important

□ By law in the United States, you must program your phone number identification (your CSI) into your machine before you can connect the public phone system. See ⇒ P.135 *"Initial Settings (Function 61)"* 


# **Connecting The Power And Switching On**

▲ CAUTION: Do not switch on until everything is connected properly.

**U** Insert the power cable into the socket located at the rear of the machine.

**2** Plug in the cable to the mains.

**3** Turn the power switch on.



### ∰Important

- □ The supply from the wall outlet must not fluctuate more than 10V either side of 230 Vac.
- □ The power cord should not be laid in a place where it might trip somebody.
- □ Do not lay anything on the power cord.
- □ If you have to use an extension cord, make sure that it is capable of carrying 300V/10A, and that your facsimile terminal is the only piece of equipment connected that cord.

# **Initial Settings & Adjustments**

Before you connect your machine to the telephone system, you must enter a few settings and make a few adjustments.

### Own number:

The phone number used by your fax line.

CSI (Called Station Identification, required by international law):

This is your fax machine's phone number, which must include country and area codes. During any communication, your CSI appears on their display. (Conversely their CSI appears on your display.)

### RTI (Remote Terminal Identification):

This should be your name or company name, in 20 characters or less. During a communication, if the other party's fax machine supports RTI, then this replaces the CSI above. The other party's name will appear on your display, and yours on theirs.

### TTI (Transmitter Terminal Identification):

This must be the telephone number of the line your machine is connected to.

It will be printed on the header of every page you send. Required in the USA.

### Access number:

If you select inside line, you must program the number which proceeds the telephone number.

### ✤ Line:

You must match the fax machine to the type of line you use: a tone line

or a pulse line. Then, you should connect the line to the machine.

### Date & Time:

Necessary for many functions and required in the USA.

### ∰Important

The CSI code is required by international law. You cannot legally connect a fax machine to the telephone system if the CSI code is not programmed. Further, the TTI code and the date and time of transmission must be included in the header of all pages faxed to, from, or within the United States.


### **Initial Settings (Function 61)**

During the course of this procedure you'll have to enter letters and other characters.

Use the ten key pad for entering numbers. Use Quick Dial keys 1 to 26 for entering letters, the ◀ and ► keys to change to another letter, the **[Clear]** key to erase a letter, **[Yes]** key to accept a character, and Quick Dial key 27 to enter spaces and Quick Dial key 28 to enter symbols. See P.122 "Entering Characters" for details.

If these settings have been made before, the messages on the display will not always match those shown here. The setting already entered will appear along with the word CHANGE?. In this case, press the **[Yes]** key to change the setting.

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then enter [6] [1] and the [Yes] key. 8



### Press the **[Yes]** key.



### Enter your phone number.


OWN	NO.	KPAD/Y/N
0111	212-5551	234

### 🖉 Note

□ The format of the number is normally as follows: International Dial Prefix, Your Country Code, Your Area Code, then you must add a Pause, followed by your telephone number. Check the International Dialing Prefix and the Country Code with your local telecommunications operator. The example shown is for the USA; the codes to add are 011 and 1.

### Press the **[Yes]** key.

PROGRAMMED will flash on the display and you'll get the display.



### **5** Press the **[Yes]** key.



Enter your office, company, or personal name, or any other appropriate identification. (Using the Quick Dial keys.) RTI ABC Y/N XYZ COMPANY

### Reference

See P.122 "Entering Characters".

### Press the **[Yes]** key.

PROGRAMMED will flash on the display and you'll get the display.

SET TTI

Y/NEXT⊮

8 Press the **[Yes]** key.

### Press the [No] key.

The RTI programmed in step **2** appears. You should keep it.

TTI CHANGE? Y/N XYZ COMPANY

### 🖉 Note

□ If you wish to change it, press the **[Yes]** key and edit the TTI.

Press the [No] key to keep the TTI as is.

Y∕NEXT⊮ SET CSI

### Press the **[Yes]** key.



**D** Enter your phone number including the country and area codes, (but no pauses).


CSI	KPAD/Y/N
12125551234	

### 🖉 Note

 $\Box$  Should be the same as in step **\Box**.

### Press the **[Yes]** key.

PROGRAMMED will flash on the display and you'll get the display.



## **Setting The Access Number**

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then enter [6] [1] and the [Yes] key.

Y⁄NEXT⊮ SET OWN NUMBER

2 Press ▶ until the following display is shown.



B Press the [Yes] key.



**4** Enter the number which you use to access an outside line.



• Press the [Yes] key to store your setting, then press the [Function] key.

# Setting The Phone Line (Function 62)

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. Then enter [6] [2] and the [Yes] key.

Y/NEXT⊮ SELECT LINE

Press the **[Yes]** key.

SELECT	LINE	\// <b>∳</b>
▶TT PI		

### 🖉 Note

 $\Box$  TT = Touch Tone

 $\square$  PD = Pulse Dial

B Press ◀ and ▶ to set your machine for a tone dial line (TT) or a pulse dial line (PD).

> SELECT LINE Y/40 TT 0-PD

## Press the **[Yes]** key.


PROGRAMMED will flash on the display and you'll get the display.

### **5** Press the [Function] key.

READY 100% 10:00 SET DOC. OR DIAL NO.

# Setting The Date & Time (Function 91)

Press the [Function] [6] then enter the access code [2] [2] [2] [2]. 8

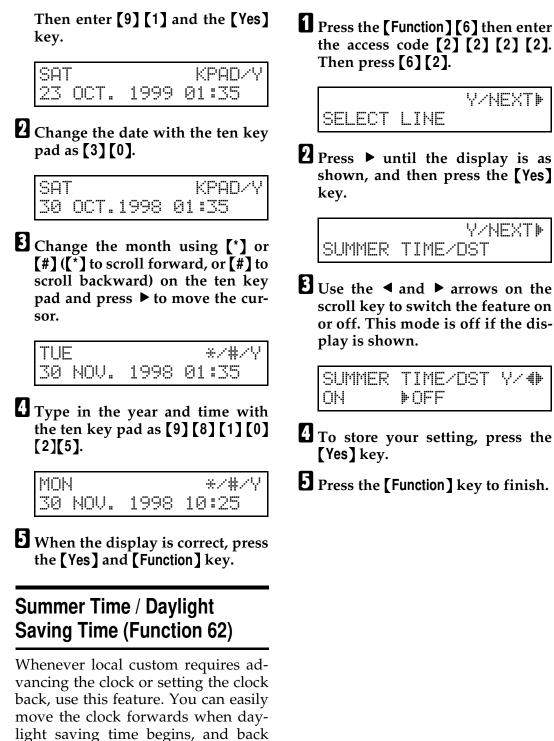

Y∕NEXT**Þ** 

**2** Press **•** until the display is as shown, and then press the [Yes]

Y∕NEXT≱ SUMMER TIME/DST

**3** Use the ◀ and ▶ arrows on the scroll key to switch the feature on or off. This mode is off if the display is shown.

SUMMER	TIME/DST	Y∕∳
ON	▶OFF	

- To store your setting, press the
- **D** Press the **[Function]** key to finish.

when it ends.

time.

When you install the machine for the first time, take care that the setting is correct before you set the date and

# 9. Function List

# **Function List**

Press the <b>[Function]</b> key followed by one of the nu	mbers below.
---	--------------

No.	Feature	Reference
11	Picking a document stored elsewhere	P.71 "Calling To Request A Message (Polling)"
21	Erasing a message stored for transmis- sion	P.34 "Erasing A Stored Mes- sage Before It Is Sent (Func- tions 21 & 22)"
22	Erasing instructions to pick up a docu- ment.	P.34 "Erasing A Stored Mes- sage Before It Is Sent (Func- tions 21 & 22)"
31	Storing a number in one of the Quick Dial keys at left.	P.25 "Storing & Editing Fax Numbers (Functions 31 & 32)"
32	Storing a number as a two-digit code.	P.25 "Storing & Editing Fax Numbers (Functions 31 & 32)"
33	Storing a group of numbers.	P.28 "Storing & Editing A Group Of Fax Numbers (Function 33)"
34	View contents of Quick Dials/Register a program label.	P.45 "Labeling a program"
35	Register frequently used functions in a User Function key.	P.73 "User Function Keys"
36	Setting the paper size.	P.91 "Changing The Paper Size Setting"
41	Checking the last 35 communications.	P.64 "Journal (Function 41)"
42	Printing a list of all messages and pick- up files stored in the machine.	P.64 "File list (Function 42)"
43	Printing a list of all the telephone num- bers stored in the fax machine.	P.64 "Telephone number list (Function 43)"
44	Print a list showing currently stored Pro- grams.	P.65 "Program List ( Func- tion 44 )"
51	Printing a message stored in the ma- chine.	P.35 "Printing A Stored Mes- sage (Function 51)"

No.	Feature	Reference
52	Print received documents that were sent to you by Confidential Transmission.	P.37 "Printing messages Re- ceived into Memory (Func- tion 52)"
61 *1	Initial Settings	P.135 "Initial Settings & Ad- justments"
	Own telephone number	P.135 "Initial Settings (Func- tion 61)"
	Confidential ID	P.36 "Storing & Editing the Confidential ID"
	RTI ( a name ID sent to other machines)	P.135 "Initial Settings (Func- tion 61)"
	TTI ( an ID printed on messages you send )	P.135 "Initial Settings (Func- tion 61)"
	CSI ( phone ID sent to other machines )	P.135 "Initial Settings (Func- tion 61)"
	PSTN accessing code	P.137 "Setting The Access Number"
	Number of Ringing	P.18 "Setting the Auto Ring Time"
62 *1	Selecting the phone line	P.137 "Setting The Phone Line (Function 62)"
	Turning authorized reception on or off.	P.53 "Switching authorized reception on / off (Function 62)"
	Turning the forwarding on or off.	P.60 "Switching forwarding on / off (Function 62)"
	Turning the Power Saving Timer on or off.	P.69 "Switching the Power Saving Timer on / off ( Func- tion 62 )"
	Turning the Summer Timer / Daylight Saving Time on or off.	P.138 "Summer Time / Day- light Saving Time (Function 62)"
63 <sup>*1</sup>	Printing and setting user parameters.	P.114 "User Parameters"
71 *1	Power Saver	P.68 "Saving Energy With The Power Saving Timer"
72 <sup>*1</sup>	Register personal Codes.	P.47 "Programming the per- sonal codes"

No.	Feature	Reference
81 *1	Setting the list of specified senders.	P.54 "Entering A List Of Senders To Treat Differently (Function 81)"
82 *1	Register the number to forward messages to, and which senders messages to forward.	P.57 "Forwarding"
91 *1	Adjusting the clock.	P.137 "Setting The Date & Time (Function 91)"
92 *1	Adjust the volume.	P.119 "Adjusting The Vol- ume Of Various Features (Function 92)"
93 *1	Selecting a different language.	P.121 "Selecting The Dis- play's Language (Function 93)"
94 *1	Counters	P.43 "Counters (function 94)"
95 <sup>*1</sup>	Adjust the printing margins.	P.103 "Adjusting the Print- ing Margins (Function 95)"


<sup>\*1</sup> These functions require the access code (see P.113 "Access Code For Functions 61 To 95").

Photocopy this table and use as a quick reference.


# 10. Laser Label

## Position of the Laser Label

Do not attempt any maintenance or troubleshooting other than that mentioned in this manual. This machine contains a laser beam generator and direct exposure to laser beams can cause permanent eye damage. For this reason, do not remove the back cover. The laser generator exists inside the machine in the location shown by the arrow below.

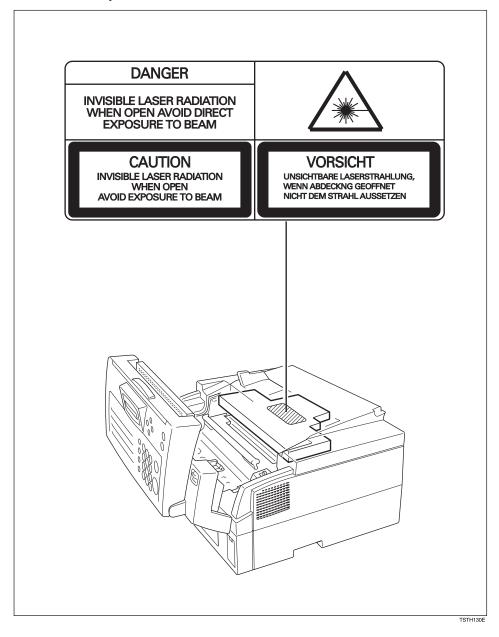

The certification is located behind the machine.

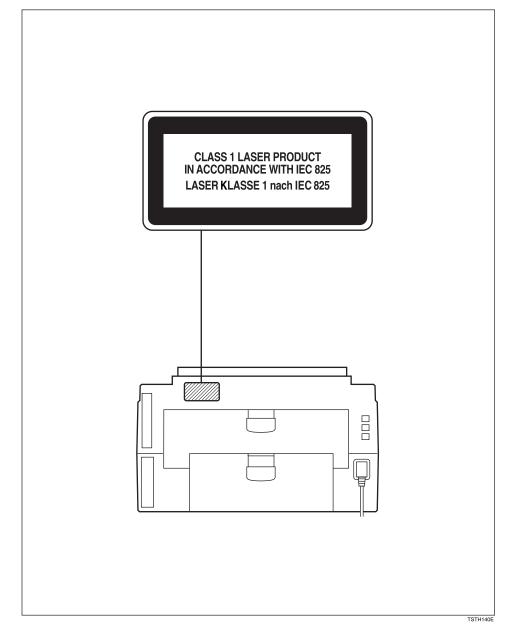

10

# 11. BABT Notice

## **BABT Notice**

### NOTICE TO USERS (Great Britain)

This model is designed and approved for connection to the following circuits.

- British Telecom Public Switched Telephone Network
- Hull Public Switched Telephone Network
- PABX Extensions
- Mercury Communications Limited Public Switched Telephone Network
- CONNECTION TO THE PSTN OR A PABX EXTENSION

If there is a line or jack socket already installed you may connect this model using the line lead supplied. If you require a socket to be fitted, complete the attached form and send it to your local telephone manager's office.

### IMPORTANT NOTICE

- The connection to the BT network must be unplugged before the earth is disconnected.
- ② The connection to the BT network must not be hard wired.
- ③ Please ensure that connection to the mains supply(240VAC), is correctly made and that the power is switched on before use.
- ④ The apparatus is suitable for direct connection to exclusive lines of Public Switched Telephone Network, and for con-

nection to compatible PABXs (consult your authorised dealer for the list of compatible PABXs and for installation thereon), or via an RBS. The definition of an RBS (Relevant Branch System) for PSTN lines, is given in BS6789 section 6.1, clause 2.4.

- (5) When idle, this model allows normal use of an associated main telephone, which must be plugged into the BS6312 compatible connector, provided for telephone line connection. Only one such connection may be made.
- ③ The apparatus must be connected to PSTN lines which use loop disconnect or DTMF signalling.
- ⑦ The machine is not suitable as an extension to a payphone, for use on shared service lines, or on 1 - 1 carrier systems.
- The Terminal operates in mode 1 (autodialling).
- The user is advised to check all numbers stored in the register before making a call.
- The approval of this terminal for connection to the British Telecom public switched telephone network is INVALIDATED if the apparatus is subject to any modification in any material way not authorised by BABT or it is used with, or connected to: a) Internal software that has not been formally accepted by BABT.

b) External control software or external control apparatus which causes the operation of the terminal or associated call set-up equipment to contravene the requirements of the approval.

All apparatus connected to this terminal and thereby connected directly to the British Telecom public switched telephone network must be approved apparatus as defined in Section 22 of the British Telecommunications Act 1984.

- ① This apparatus has been approved for the use of the following facilities:
  - Storage of Telephone Numbers for Retrieval by Predetermined Code
  - Automatic Call Initiation
  - Operation in the Absence of Proceed Indication (Although not Detected)
  - Automatic Dialling Facilities
  - Auto-Calling Facility
  - Loudspeaking Facility
  - Series Connection Facility
  - Automatic Storage of Last Number Dialled
  - Tone Detection Busy Tone
  - Repeat Attempt Facilities: Multiple (Automatic)
  - Auto Clear from Call Originating End
  - Integral Modem

Any other usage will invalidate the approval of the apparatus if as a result it then ceased to conform to the standard against which approval was granted.

- Connection to a PBX it cannot be guaranteed that the apparatus will operate correctly under all possible conditions connection to compatible PBX's. Any cases of difficulty should be referred in the first instance to the supplier of the telephone apparatus.
- ③ This apparatus provides an off hook detector and switching of the line between the telephone and modem. The voltage drop introduced by this apparatus into the loop connection between the main telephone and the network at a current of 40ma d.c. is 0.3 volts.
- Only apparatus conforming with EN60950 may be connected to the series socket. Any interconnection between the above socket and other connections, directly or by the way of other apparatus, may produce hazardous conditions on the BT network. Advice should be obtained from a competent engineer before any such connection is made.
- The apparatus is supplied with a connection to the Public switched telephone network, which is referred to as a TNV circuit. There is also an optional printer port that may be fitted, which is referred to as a SELV circuit.

Please ensure that the TNV circuit is only connected to another TNV circuit and that the SELV circuit is only connected to other SELV circuit.

The apparatus does not recognise a secondary proceed indication. Although this equipment can use either loop disconnect or DTMF signalling, only the performance of the DTMF signalling is subject to regulatory requirements for correct operation. It is therefore strongly recommended that the equipment is set to use DTMF signalling for access to public or private emergency services. DTMF signalling also provides faster call set up.

# INDEX

### A

Access Code, 113 Access Number, 135, 137 Activity Report, 42 Add Paperindicator, 9 Add Toner Indicator, 9 Al Redial key, 24 Arrow keys, 9 Authorized Reception, 53 Automatic Redialing, 24 Auto mode, 17 Auto Ring Time, 18

#### В

Base Machine, 125 Broadcasting, 24

### С

Capabilities, 124 Chain Dialing, 33 Changing Paper Size, 86 Paper Size Setting, 91 Program Label, 46 Characters, 122 Check Displayindicator, 9 Cleaning, 85 CLEAR COPY, 96 Clearing a Jam *Cassette Entrance*, 98 Document, 95 inside the machine, 96 *Upper Rear Unit*, 99 Clear key, 10 CLEAR ORIGINAL, 95 Clock, 137 Communication Failure Report, 41 Communication Problems, 102 Communication Result Report, 41 Confidential ID, 47 Confidential Reception, 36 Connecting The Machine, 132 Control panel Display, 9 Copying, 70 Copy key, 10 Copy Paper, 6

Counters, 43 Cover release button, 8 CSI (Called Station Identification), 135

### D

Date & Time, 135, 137 Daylight Saving Time, 138 Dial Options, 31 Document delivery tray, 7 Document Feeder *Acceptable originals*, 11 Document guide, 8 Document Jam, 95 Document table, 8 Document Types, 11 Dual Access, 75

### Ε

Editing, 55 Confidential ID, 36 Fax Numbers, 25 Function Program, 74 Group, 28 Personal Codes, 50 Quick Dial Numbers, 25 Speed Dial Numbers, 26 Forwarding Feature, 58 Energy Saver key, 10 Energy Saving, 66, 68 Entering Numbers, 122 Symbols, 122 Characters, 122 Erasing Function Program, 74 Messages, 34 Program, 46 Quick Dial Numbers, 25 Special Terminal, 56 Speed Dial Numbers, 26 Group, 29 Error Messages, 109 Error Report, 41 **External Telephone** Installation, 131

#### F

Faxing, 11, 13 Fax mode, 17 File list, 64 File Reserve Report, 41 Forwarding, 57 Forwarding Mark, 61 Free polling reception program, 45 Function key, 10 Function List, 139

### G

Grounding, 4 Group Dial List, 28, 64 Group Key, 29 Groups, 28

#### I

ID Code *Confidential ID*, 36 Immediate Transmission, 15 Indicators *Add Paper*, 9, 19 *Add Toner*, 9, 19 *Check Display*, 9, 93 *Manual Receive*, 9, 17 *Memory*, 9, 13 *Receive File*, 9, 93 Initial Settings, 135 Installation, 127

### J

Journal, 41, 42, 64

### Κ

Keystroke Programs, 44

### L

Labeling Program, 45 Language Selection, 121 Length Reduction, 101 Location, 128

#### Μ

Machine Environment, 128 Machine Layout, 7 Main switch, 7 Maintaining, 77 Manual Receive indicator, 9, 17 Margin, 103 Memory Card, 130 Memory indicator, 13 Memory indicator, 9 Memory Transmission, 13

#### Ν

Numbers, 122

#### 0

On Hook Dial key, 10 On/Off Switches *Authorized Reception*, 53 *Forwarding*, 60 *Power Saver*, 69 Operating Difficulties, 104 Operating Precautions, 5 Operation panel, 8, 9 Own number, 135

#### Ρ

Page Condition, 12 Page Count, 21 Paper, 77 Paper cassette, 7 Paper Size Setting, 91 Paper Specifications, 123 Part Names, 7 Pause / AI Redial key, 9 Personal Codes, 22, 47, 48, 71 Phone Line, 133, 135, 137 Polling Canceling a Polling Operation, 34 Polling Reception, 71 Polling Reception, 71 Polling Result Report, 42 Power, 4, 134 Power Failure Report, 41 Power Saver, 68 Print delivery tray, 7 Printing Page Number, 21 Part of the Image, 42 Received Messages, 19, 37 Stored Messages, 35 Telephone number list, 64 Printing Margins, 103

Programming Confidential ID, 36 CSI, 135 Date & Time, 137 Dial Option key, 31 Fax Numbers, 25 Forwarding, 57 Group, 28 Group key, 29 Keystroke Program, 44 Keystrokes, 44 Personal Codes, 47, 48, 71 Quick Dial Numbers, 25 RTI, 135 Speed Dial Numbers, 26 Summer Time / Daylight Saving Time, 138 TTI, 135 User Function Code, 73

### Q

Quick Dial, 25 Quick Dial keys, 10

### R

Receive Fileindicator, 9 Receiving Options, 63 Reception Mode Auto Mode, 17 *Fax Mode*, 17 Telephone Mode, 17 Reception Mode key, 10 Redialing, 24 Rejecting Messages, 52, 53 Report formats, 42 Reports, 41 Communication Failure Report, 41 Communication Result Report, 41 Confidential File Report, 37 Error Report, 41 File List, 64 File Reserve Report, 41 Journal, 41, 42, 64 Polling Result Report, 42 Power Failure Report, 41 Quick Dial List, 64 Service Report, 111 Speed Dial List, 26, 64 *Telephone number list*, 64 *Transmission Result Report*, 41

User Parameter List, 115 Reports You Can Printout Yourself, 64 Resolution, 20 Resolution key, 9 Reverse Order Printing, 63 RTI (Remote Terminal Identification), 135

### S

Safety, 1 Scanning area, 11 Sending a Fax, 13 Sending At A Specific Time (Send Later), 21 Service Report, 111 Service Station, 111 Setting the timer, 68 Special Senders, 54 Special Terminals, 55 Specifications, 125 Speed Dial, 26 Speed Dial / Tel Directory key, 9 Start key, 10 Stop key, 10 Substitute Reception, 19 Summer Time, 138 Symbols, 6, 122

### Т

Technical Reference, 113 Telephone, 38, 39 Telephone Directory, 16 Telephone mode, 17 Telephone number list, 64 Ten key pad, 10 Tonal Signals, 51 Toner Cassette, 84 Toner Cassette Replacement, 80 Transmission Immediate, 15 Memory, 13 Tonal Signals, 51 Using Redial, 24 Transmission Result Report, 41 Troubleshooting, 93 TTI (Transmitter Terminal Identification), 22, 135

### U

User Function keys, 10, 73 User Parameter Hints, 118 User Parameter List, 115 User Parameters, 114 Using *AI Redial key*, 24 *Dial Options*, 31 *Function Program*, 73 *Program*, 45 *Telephone*, 38 *Tone key*, 51

#### ۷

Ventilation, 129 Volume Control, 119

### W

Wild Cards, 62

