Fax Option Type C2000 Machine Code: B868

SERVICE MANUAL

Aug. 31st, 2006 Subject to change

Important Safety Notices

WARNING

- Never install telephone wiring during a lightning storm.
- Never install telephone jacks in wet locations unless the jack is specifically designed for wet locations.
- Never touch uninsulated telephone wires or terminals unless the telephone line has been disconnected
 at the network interface.
- Use caution when installing or modifying telephone lines.
- Avoid using a telephone (other than a cordless type) during an electrical storm. There may be remote
 risk of electric shock from lightning.
- Do not use a telephone or cellular phone to report a gas leak in the vicinity of the leak.

ACAUTION

- Before installing the fax unit, switch off the main switch, and disconnect the power cord.
- The fax unit contains a lithium battery. The danger of explosion exists if a battery of this type is
 incorrectly replaced. Replace only with the same or an equivalent type recommended by the
 manufacturer. Discard batteries in accordance with the manufacturer's instructions and local
 regulations.




- Note for Australia:
- Unit must be connected to Telecommunication Network through a line cord which meets the requirements of ACA Technical Standard TS008.


Symbols and Abbreviations

Conventions Used in this Manual

This manual uses several symbols.

Symbol	What it means	
	Refer to section number	
Ê	Screw	
	Connector	
C	E-ring	
⟨♡⟩	Clip ring	
Ş	Clamp	





Short Edge Feed (SEF)

Long Edge Feed (LEF)

Cautions, Notes, etc.

The following headings provide special information:

MARNING

• Failure to obey warning information could result in serious injury or death.

ACAUTION

• Obey these guidelines to ensure safe operation and prevent minor injuries.

- Obey these guidelines to avoid problems such as misfeeds, damage to originals, loss of valuable data and to prevent damage to the machine.
- Always obey these guidelines to avoid serious problems such as misfeeds, damage to originals, loss
 of valuable data and to prevent damage to the machine. bold is added for emphasis.

UNote

• This information provides tips and advice about how to best service the machine.

TABLE OF CONTENTS

Important Safety Notices	1
Symbols and Abbreviations	2
Conventions Used in this Manual	
Cautions, Notes, etc	2
1. Installation	
Fax Unit (B868)	
Accessory Check	7
Installation Procedure	7
Installing Panels and Keys	12
Settings	13
Fax Unit Option	14
Handset (B433)	14
2. Replacement and Adjustment	
FCU	15
3. Troubleshooting	
Error Codes	
IFAX Troubleshooting	34
IP-Fax Troubleshooting	36
IP-Fax Transmission	36
IP-Fax Reception	39
4. Service Tables	
Beforehand	43
Service Tables	44
SP1-XXX (Bit Switches)	44
SP2-XXX (RAM Data)	45
SP3-XXX (Tel Line Settings)	45
SP4-XXX (ROM Versions)	46
SP5-XXX (Initializing)	46
SP6-XXX (Reports)	47
SP7-XXX (Test Modes)	48
Bit Switches	50
System Switches	50
I-Fax Switches	61

Printer Switches	66
Communication Switches	72
G3-1 Switches	78
IP Fax Switches	86
NCU Parameters	94
Dedicated Transmission Parameters	107
Programming Procedure	107
Parameters	107
Service RAM Addresses	115
5. Detailed Section Descriptions	
Overview	125
Boards	126
FCU	126
MBU	127
Fax Communication Features	128
Internet Mail Communication	128
IP-Fax	137
What is IP-FAX?	137
6. Specifications	
General Specifications	
IFAX Specifications	141
IP-FAX Specifications	143
Fax Unit Configuration	144

1. Installation

Fax Unit (B868)

Accessory Check

	1	Installation procedure	1
	2	Fax application panel	1
	3	Key top-fax	2
	4	Copy key panel	2
	5	FCU	1
	6	SG3 label	1
	7	Handset bracket (-17)	1
F	8	Modular code (-17)	1
Fax	9	User function key decal (-17, -29)	1
	10	Operating Instructions (-17, -29)	1
	11	Ferrite core	
	12	Connector cover-Network cable	1
	13	Connector cover-Tel line (-17)	1
	14	Serial number decal	1
	15	SD card	
	16	FCC label (-17)	1

Installation Procedure


ACAUTION

- Before installing the fax option:
 - 1. Print out all data in the printer buffer (if the printer option is installed).


1

2. Turn the main switch off and disconnect the power cord and the network cable.


Step 1-Controller Box

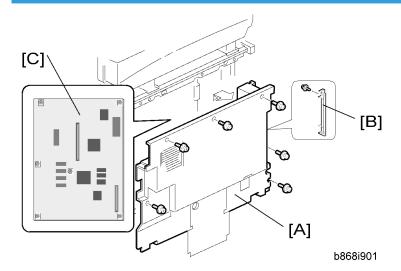

- 1. Remove the rear cover [A] ($\hat{\mathbb{F}}$ x 6).
- 2. Remove the slot cover [B] ($\hat{\mathscr{F}}$ x 1).
- 3. Remove one screw [C] from the BICU.




4. For B268/B269 model only, remove the GDI controller box [D] ($\hat{\mathscr{F}}$ x 7).

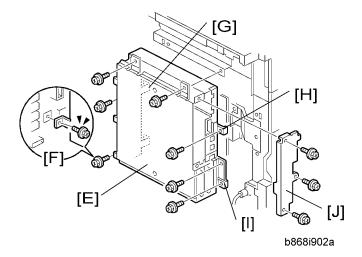

- 5. Connect the controller box [E] to the BICU. Make sure that the BICU is not damaged [F] and that the three openings [G][H][I] hold the controller box.
- 6. Fasten the screws ($\mbox{\ensuremath{\not{\not}}}\xspace$ x 7 [including the screw [C]).
- 7. Remove the FCU cover [J] (\mathscr{F} x 3).


Step 2-Fax




1. Short the jumper [A] on the MBU [B].



- The jumper works as the battery switch.
- 2. Before installing the Fax unit, push the MBU [B] and confirm that the MBU is properly connected to the FCU [C].
- 3. Install the FCU [C] into the slot (x 3 [including the screw [D] removed in Step 1]).
- 4. Attach the connector cover [E] to the network cable slot if you do not connect a network cable.
- 5. For NA model only, attach the connector cover to the "TEL" slot if a handset or an external telephone is not installed.




- 6. Attach the ferrite core [F] to the telephone cable [G]. The end of the ferrite core must be about 7 cm (2.8") from the end of the cable [H].
- 7. Connect the telephone cable to the "LINE" jack.




• Connect the handset cable to the "TEL" jack if the handset is installed.

If the printer/scanner option has already been installed, skip steps 8 and 9.



- 8. Remove the SD-card cover [I] ($\mathscr{F} \times 1$).
- 9. Insert the SD card [J] in the SD card slot 2 (second from the bottom).



- 10. Attach the serial number decal of the fax unit to the rear left [K] on the rear cover of the mainframe.
- 11. Attach the SG3 decal [L] to the right side corner of the front cover.
- 12. For NA model only, attach the FCC decal below the serial number decal of the fax unit.

If you install the printer /scanner option after installing the FCU, do the following procedure.

- 1. Do "Step 2-Printer/Scanner" in the "MFP EXPANSION INSTALLATION PROCEDURE".
- 2. Turn on the main power switch, and then enter the SP mode.
- 3. Confirm that the address book data is in the SD card, which is installed in the SD card slot 2 (second from the bottom) with SP5-846-043.


- 4. Copy the address book data in the SD card (slot 2) to the SD card of the printer/scanner (slot 1) with SP5-846-042.
- 5. Turn off the main power switch after completing copying.
- 6. Remove the SD card in the SD card slot 2.
- 7. Reassemble the machine.
- 8. Keep it in the safe place.

Step 3-Reassembling

- 1. Reassemble the controller box.
- 2. Install the rear cover.


Installing Panels and Keys

Step 4-Panel

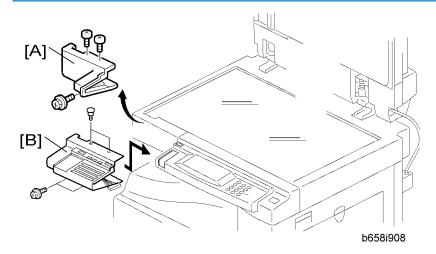

- 1. Remove the front upper left cover [A] (\mathscr{F} x 3).
- 2. Install the optional operational panel [B] ($\mathbb{Z} \times 1$, $\mathcal{F} \times 4$ [including three screws removed in step 1]).

Step 5-Fax Keys

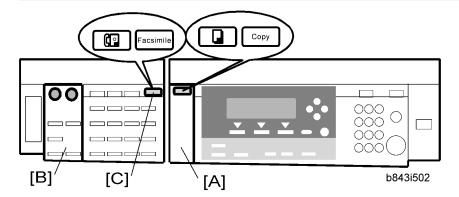

- 1. Remove the dummy cover (from the basic operation panel) and install the copy key panel [A].
- 2. Install the fax panel [B].
- 3. Remove the dummy key (from the optional operation panel) and install the fax key [C] to the optional operation panel.

Settings

Step 6-Fax Settings

Initializing the Fax unit

When you press the Fax key for the first time after installation, the error "SRAM problem occurred / SRAM was formatted" will show on the LCD for initializing the program of the fax unit. Turn the main power switch off/on to clear the error display.



- If another error occurs after initialization, this can be a functional problem.
- 1. Select fax SP1-101-016 and specify the country code.
- 2. Select fax SP3-101-001 and specify the service station.

For Fax option only (without printer/scanner option)


- 1. Turn the main switch on.
- 2. Start the SP mode.
- 3. Select SP5-985-001 (NIC setting) and change the setting value to "0" (OFF).
- 4. Select SP5-985-002 (USB setting) and change the setting value to "O" (OFF).
- 5. Turn the main switch off and on.

Fax Unit Option

Handset (B433)



• The optional handset is available for the U.S. version only.




- 1. Make two holes [A] in the scanner left cover.
- 3. Remove the label [C] from the handset cradle [D]. Attach the cradle [D] to the bracket [B] (\mathscr{E} x 2), and then replace the label [C].
- 4. Install the handset [E] on the cradle [D].
- 5. Attach the ferrite core to the cable. (see step 6 in the "Step2-Fax" of the fax unit installation procedure)
- 6. Connect the cable [F] to the "TEL" jack at the rear of the machine.


9

2. Replacement and Adjustment

FCU



1. Remove the rear cover [A] ($\hat{\mathbb{F}}$ x 6).



2. FCU [B] (F x 3)

When installing the new FCU

1. When you replace the FCU board, remove the MBU board from the old FCU board and install it on the new FCU board.

2. Set the correct date and time with the User Tools: User Tools> System Settings> Timer Setting> Set Date/Time



- Do not turn off the battery switch (SW1).
- Do SP6-101 in the "Fax SP" to print the system parameters, and check the settings.

3. Troubleshooting

Error Codes

If an error code occurs, retry the communication. If the same problem occurs, try to fix the problem as suggested below. Note that some error codes appear only in the error code display and on the service report.

Code	Meaning	Suggested Cause/Action
0-00	DIS/NSF not detected within 40 s of Start being pressed	 Check the line connection. The machine at the other end may be incompatible. Replace the NCU or FCU. Check for DIS/NSF with an oscilloscope. If the rx signal is weak, there may be a bad line.
0-01	DCN received unexpectedly	 The other party is out of paper or has a jammed printer. The other party pressed Stop during communication.
0-03	Incompatible modem at the other end	The other terminal is incompatible.
0-04	CFR or FTT not received after modem training	 Check the line connection. Try changing the tx level and/or cable equalizer settings. Replace the FCU. The other terminal may be faulty; try sending to another machine. If the rx signal is weak or defective, there may be a bad line. Cross reference Tx level - NCU Parameter 01 (PSTN) Cable equalizer - G3 Switch 07 (PSTN) Dedicated Tx parameters in Service Program Mode
0-05	Modem training fails even G3 shifts down to 2400 bps.	 Check the line connection. Try adjusting the tx level and/or cable equalizer. Replace the FCU. Check for line problems.

Code	Meaning	Suggested Cause/Action
		Cross reference
		See error code 0-04.
0-06	The other terminal did not reply to DCS	 Check the line connection. Try adjusting the tx level and/or cable equalizer settings. Replace the NCU or FCU. The other end may be defective or incompatible; try sending to another machine. Check for line problems. Cross reference See error code 0-04.
0-07	No post-message response from the other end after a page was sent	 Check the line connection. Replace the NCU or FCU. The other end may have jammed or run out of paper. The other end user may have disconnected the call. Check for a bad line. The other end may be defective; try sending to another machine.
0-08	The other end sent RTN or PIN after receiving a page, because there were too many errors	 Check the line connection. Replace the NCU or FCU. The other end may have jammed, or run out of paper or memory space. Try adjusting the tx level and/or cable equalizer settings. The other end may have a defective modem/NCU/FCU; try sending to another machine. Check for line problems and noise. Cross reference Tx level - NCU Parameter 01 (PSTN) Cable equalizer - G3 Switch 07 (PSTN) Dedicated Tx parameters in Service Program Mode

Code	Meaning	Suggested Cause/Action
0-14	Non-standard post message response code received	 Incompatible or defective remote terminal; try sending to another machine. Noisy line: resend. Try adjusting the tx level and/or cable equalizer settings. Replace the NCU or FCU. Cross reference See error code 0-08.
0-15	The other terminal is not capable of specific functions.	The other terminal is not capable of accepting the following functions, or the other terminal's memory is full. • Confidential rx • Transfer function • SEP/SUB/PWD/SID
0-16	CFR or FTT not detected after modem training in confidential or transfer mode	 Check the line connection. Replace the NCU or FCU. Try adjusting the tx level and/or cable equalizer settings. The other end may have disconnected, or it may be defective; try calling another machine. If the rx signal level is too low, there may be a line problem. Cross reference See error code 0-08.
0-20	Facsimile data not received within 6 s of retraining	 Check the line connection. Replace the NCU or FCU. Check for line problems. Try calling another fax machine. Try adjusting the reconstruction time for the first line and/or rx cable equalizer setting. Cross reference Reconstruction time - G3 Switch 0A, bit 6 Rx cable equalizer - G3 Switch 07 (PSTN)

Code	Meaning	Suggested Cause/Action
0-21	EOL signal (end-of-line) from the other end not received within 5 s of the previous EOL signal	 Check the connections between the FCU, NCU, & line. Check for line noise or other line problems. Replace the NCU or FCU. The remote machine may be defective or may have disconnected. Cross reference Maximum interval between EOLs and between ECM frames - G3 Bit Switch OA, bit 4
0-22	The signal from the other end was interrupted for more than the acceptable modem carrier drop time (default: 200 ms)	 Check the line connection. Replace the NCU or FCU. Defective remote terminal. Check for line noise or other line problems. Try adjusting the acceptable modem carrier drop time. Cross reference Acceptable modem carrier drop time - G3 Switch OA, bits 0 and 1
0-23	Too many errors during reception	 Check the line connection. Replace the NCU or FCU. Defective remote terminal. Check for line noise or other line problems. Try asking the other end to adjust their tx level. Try adjusting the rx cable equalizer setting and/or rx error criteria. Cross reference Rx cable equalizer - G3 Switch 07 (PSTN) Rx error criteria - Communication Switch 02, bits 0 and 1
0-30	The other terminal did not reply to NSS(A) in Al short protocol mode	 Check the line connection. Try adjusting the tx level and/or cable equalizer settings. The other terminal may not be compatible. Cross reference Dedicated tx parameters - Section 4

Code	Meaning	Suggested Cause/Action
0-32	The other terminal sent a DCS, which contained functions that the receiving machine cannot handle.	 Check the protocol dump list. Ask the other party to contact the manufacturer.
0-33	The data reception (not ECM) is not completed within 10 minutes.	 Check the line connection. The other terminal may have a defective modem/ NCU/FCU.
0-52	Polarity changed during communication	Check the line connection. Retry communication.
0-55	FCU does not detect the SG3.	FCU firmware or board defective.SG3 firmware or board defective.
0-56	The stored message data exceeds the capacity of the mailbox in the SG3.	SG3 firmware or board defective.
0-70	The communication mode specified in CM/JM was not available (V.8 calling and called terminal)	 The other terminal did not have a compatible communication mode (e.g., the other terminal was a V.34 data modem and not a fax modem.) A polling tx file was not ready at the other terminal when polling rx was initiated from the calling terminal.
0-74	The calling terminal fell back to T.30 mode, because it could not detect ANSam after sending CI.	 The calling terminal could not detect ANSam due to noise, etc. ANSam was too short to detect. Check the line connection and condition. Try making a call to another V.8/V.34 fax.
0-75	The called terminal fell back to T.30 mode, because it could not detect a CM in response to ANSam (ANSam timeout).	 The terminal could not detect ANSam. Check the line connection and condition. Try receiving a call from another V.8/V.34 fax.
0-76	The calling terminal fell back to T.30 mode, because it could not detect a JM in response to CM (CM timeout).	 The called terminal could not detect a CM due to noise, etc. Check the line connection and condition. Try making a call to another V.8/V.34 fax.

Code	Meaning	Suggested Cause/Action
0-77	The called terminal fell back to T.30 mode, because it could not detect a CJ in response to JM (JM timeout).	 The calling terminal could not detect a JM due to noise, etc. A network that has narrow bandwidth cannot pass JM to the other end. Check the line connection and condition. Try receiving a call from another V.8/V.34 fax.
0-79	The called terminal detected CI while waiting for a V.21 signal.	 Check for line noise or other line problems. If this error occurs, the called terminal falls back to T. 30 mode.
0-80	The line was disconnected due to a timeout in V.34 phase 2 – line probing.	The guard timer expired while starting these phases. Serious noise, narrow bandwidth, or low signal level can cause these errors.
0-81	The line was disconnected due to a timeout in V.34 phase 3 – equalizer training.	 If these errors happen at the transmitting terminal: Try making a call at a later time. Try using V.17 or a slower modem using dedicated tx
0-82	The line was disconnected due to a timeout in the V.34 phase 4 – control channel start-up.	parameters. Try increasing the tx level. Try adjusting the tx cable equalizer setting.
0-83	The line was disconnected due to a timeout in the V.34 control channel restart sequence.	 If these errors happen at the receiving terminal: Try adjusting the rx cable equalizer setting. Try increasing the tx level. Try using V.17 or a slower modem if the same error is frequent when receiving from multiple senders.
0-84	The line was disconnected due to abnormal signaling in V.34 phase 4 – control channel start-up.	 The signal did not stop within 10 s. Turn off the machine, then turn it back on. If the same error is frequent, replace the FCU.
0-85	The line was disconnected due to abnormal signaling in V.34 control channel restart.	 The signal did not stop within 10 s. Turn off the machine, then turn it back on. If the same error is frequent, replace the FCU.
0-86	The line was disconnected because the other terminal requested a data rate using	 The other terminal was incompatible. Ask the other party to contact the manufacturer.

Code	Meaning	Suggested Cause/Action
	MPh that was not available in the currently selected symbol rate.	
0-87	The control channel started after an unsuccessful primary channel.	 The receiving terminal restarted the control channel because data reception in the primary channel was not successful. This does not result in an error communication.
0-88	The line was disconnected because PPR was transmitted/received 9 (default) times within the same ECM frame.	 Try using a lower data rate at the start. Try adjusting the cable equalizer setting.
2-11	Only one V.21 connection flag was received	Replace the FCU.
2-12	Modem clock irregularity	Replace the FCU.
2-13	Modem initialization error	 Turn off the machine, then turn it back on. Update the modem ROM. Replace the FCU.
2-23	JBIG compression or reconstruction error	Turn off the machine, then turn it back on.
2-24	JBIG ASIC error	Turn off the machine, then turn it back on.
2-25	JBIG data reconstruction error (BIH error)	
2-26	JBIG data reconstruction error (Float marker error)	JBIG data error Classial Association in the second control of the second contro
2-27	JBIG data reconstruction error (End marker error)	Check the sender's JBIG function.Update the MBU ROM.
2-28	JBIG data reconstruction error (Timeout)	
2-29	JBIG trailing edge maker error	FCU defectiveCheck the destination device.

Code	Meaning	Suggested Cause/Action
2-50	The machine resets itself for a fatal FCU system error	If this is frequent, update the ROM, or replace the FCU.
2-51	The machine resets itself because of a fatal communication error	If this is frequent, update the ROM, or replace the FCU.
2-53	Snd msg() in the manual task is an error because the mailbox for the operation task is full.	The user did the same operation many times, and this gave too much load to the machine.
4-01	Line current was cut	 Check the line connector. Check for line problems. Replace the FCU or the NCU.
4-10	Communication failed because of an ID Code mismatch (Closed Network) or Tel. No./CSI mismatch (Protection against Wrong Connections)	 Get the ID Codes the same and/or the CSIs programmed correctly, then resend. The machine at the other end may be defective.
5-10	DCR timer expired	Replace the FCU.
5-20	Storage impossible because of a lack of memory	Temporary memory shortage. Taking CAE
5-21	Memory overflow	Test the SAF memory.
5-23	Print data error when printing a substitute rx or confidential rx message	Test the SAF memory.Ask the other end to resend the message.
5-25	SAF file access error	Replace an SD card or HDD. Replace the FCU.
6-00	G3 ECM - T1 time out during reception of facsimile data	
6-01	G3 ECM - no V.21 signal was received	Try adjusting the rx cable equalizer.Replace the FCU.
6-02	G3 ECM - EOR was received	
6-04	G3 ECM - RTC not detected	Check the line connection.

Code	Meaning	Suggested Cause/Action
		Check for a bad line or defective remote terminal.Replace the FCU.
6-05	G3 ECM - facsimile data frame not received within 18 s of CFR, but there was no line fail	 Check the line connection. Check for a bad line or defective remote terminal. Replace the FCU. Try adjusting the rx cable equalizer Cross reference Rx cable equalizer - G3 Switch 07 (PSTN)
6-06	G3 ECM - coding/decoding error	Defective FCU.The other terminal may be defective.
6-08	G3 ECM - PIP/PIN received in reply to PPS.NULL	 The other end pressed Stop during communication. The other terminal may be defective.
6-09	G3 ECM - ERR received	 Check for a noisy line. Adjust the tx levels of the communicating machines. See code 6-05.
6-10	G3 ECM - error frames still received at the other end after all communication attempts at 2400 bps	 Check for line noise. Adjust the tx level (use NCU parameter 01 or the dedicated tx parameter for that address). Check the line connection. Defective remote terminal.
6-21	V.21 flag detected during high speed modem communication	The other terminal may be defective or incompatible.
6-22	The machine resets the sequence because of an abnormal handshake in the V. 34 control channel	 Check for line noise. If the same error occurs frequently, replace the FCU. Defective remote terminal.
6-99	V.21 signal not stopped within 6 s	Replace the FCU.
13-17	SIP user name registration error	 Double registration of the SIP user name. Capacity for user-name registration in the SIP server is not sufficient.

Code	Meaning	Suggested Cause/Action
13-18	SIP server access error	Incorrect initial setting for the SIP server.Defective SIP server.
13-24	SIP authentication password error	The input password for the authentication does not match the password registered in the SIP server.
14-00	SMTP Send Error	 Error occurred during sending to the SMTP server. Occurs for any error other than 14-01 to 16. For example, the mail address of the system administrator is not registered.
14-01	SMTP Connection Failed	 Failed to connect to the SMTP server (timeout) because the server could not be found. The PC is not ready to transfer files. SMTP server not functioning correctly. The DNS IP address is not registered. Network not operating correctly. Destination folder selection not correct.
14-02	No Service by SMTP Service (421)	 SMTP server operating incorrectly, or the destination for direct SMTP sending is not correct. Contact the system administrator and check that the SMTP server has the correct settings and operates correctly. Contact the system administrator for direct SMTP sending and check the sending destination.
14-03	Access to SMTP Server Denied (450)	 Failed to access the SMTP server because the access is denied. SMTP server operating incorrectly. Contact the system administrator to determine if there is a problem with the SMTP server and to check that the SMTP server settings are correct. Folder send destination is incorrect. Contact the system administrator to determine that the SMTP server settings and path to the server are correct. Device settings incorrect. Confirm that the user name and password settings are correct.

Code	Meaning	Suggested Cause/Action
		 Direct SMTP destination incorrect. Contact the system administrator to determine if there is a problem at the destination at that the settings at the destination are correct.
14-04	Access to SMTP Server Denied (550)	SMTP server operating incorrectlyDirect SMTP sending not operating correctly
		 Failed to access the SMTP server because the HDD on the server is full. Insufficient free space on the HDD of the SMTP server.
		Contact the system administrator and check the amount of space remaining on the SMTP server HDD.
14-05	SMTP Server HDD Full (452)	Insufficient free space on the HDD where the destination folder is located. Contact the system administrator and check the amount of space remaining on the HDD where the target folder is located.
		 Insufficient free space on the HDD at the target destination for SMTP direct sending. Contact the system administrator and check the amount of space remaining on the target HDD.
14-06	User Not Found on SMTP Server (551)	The designated user does not exist.
		The designated user does not exist on the SMTP server.
		The designated address is not for use with direct SMTP sending.
	Data Send to SMTP Server Failed (4XX)	Failed to access the SMTP server because the transmission failed.
		PC not operating correctly.
14-07		SMTP server operating incorrectly
		Network not operating correctly.
		Destination folder setting incorrect.
		Direct SMTP sending not operating correctly.
14-08	Data Send to SMTP Server	Failed to access the SMTP server because the transmission failed.
	Failed (5XX)	SMTP server operating incorrectly

Code	Meaning	Suggested Cause/Action
		Destination folder setting incorrect.
		Direct SMTP sending not operating correctly.
		Software application error.
14-09	Authorization Failed for	POP-Before-SMTP or SMTP authorization failed.
14-09	Sending to SMTP Server	Incorrect setting for file transfer
14-10	Addresses Exceeded	Number of broadcast addresses exceeded the limit for the SMTP server.
14-11	Buffer Full	 The send buffer is full so the transmission could not be completed. Buffer is full due to using Scan-to-Email while the buffer is being used send mail at the same time.
14-12	Data Size Too Large	Transmission was cancelled because the detected size of the file was too large.
14-13	Send Cancelled	Processing is interrupted because the user pressed Stop.
14-14	Security Locked File Error	Update the software because of the defective software.
14-15	W 45 . 5	The transmitting a mail is interrupted via DCS due to the incorrect data.
14-13	Mail Data Error	Update the software because of the defective software.
14-16	Maximum Division Number Error	 When a mail is divided for the mail transmission and the division number of a mail are more than the specified number, the mail transmission is interrupted. Update the software because of the defective software.
14-17	Incorrect Ticket	Update the software because of the defective software.
14-18	Access to MCS File Error	The access to MCS file is denied due to the no permission of access.
14-10	VCC622 IO MICO LIIG EIIOI	Update the software because of the defective software.

Code	Meaning	Suggested Cause/Action
14-30	MCS File Creation Failed	Failed to create the MCS file because: The number of files created with other applications on the Document Server has exceeded the limit. HDD is full or not operating correctly. Software error.
14-31	UFS File Creation Failed	 UFS file could not be created: Not enough space in UFS area to handle both Scanto-Email and IFAX transmission. HDD full or not operating correctly. Software error.
14-32	Cancelled the Mail Due to Error Detected by NFAX	Error detected with NFAX and send was cancelled due to a software error.
14-33	No Mail Address For the Machine	Neither the mail address of the machine nor the mail address of the network administrator is registered.
14-34	Address designated in the domain for SMTP sending does not exist	 Operational error in normal mail sending or direct SMTP sending. Check the address selected in the address book for SMTP sending. Check the domain selection.
14-50	Mail Job Task Error	Due to an FCU mail job task error, the send was cancelled: Address book was being edited during creation of the notification mail. Software error.
14-51	UCS Destination Download Error	Not even one return notification can be downloaded: The address book was being edited. The number for the specified destination does not exist (it was deleted or edited after the job was created).
14-60	Send Cancel Failed	The cancel operation by the user failed to cancel the send operation.
14-61	Notification Mail Send Failed for All Destinations	All addresses for return notification mail failed.

Code	Meaning	Suggested Cause/Action
14-62	Transmission Error due to the existence of zero line page	When the 0 line page exists in received pages with G3 communication, the transmission is interrupted.
15-01	POP3/IMAP4 Server Not Registered	 At startup, the system detected that the IP address of the POP3/IMAP4 server has not been registered in the machine.
15-02	POP3/IMAP4 Mail Account Information Not Registered	The POP3/IMAP4 mail account has not been registered.
15-03	Mail Address Not Registered	The mail address has not been registered.
15-10	DCS Mail Receive Error	• Error other than 15-11 to 15-18.
15-11	Connection Error	 The DNS or POP3/IMAP4 server could not be found: The IP address for DNS or POP3/IMAP4 server is not stored in the machine. The DNS IP address is not registered. Network not operating correctly.
15-12	Authorization Error	POP3/IMAP4 send authorization failed: Incorrect IFAX user name or password. Access was attempted by another device, such as the PC. POP3/IMAP4 settings incorrect.
15-13	Receive Buffer Full	Occurs only during manual reception. Transmission cannot be received due to insufficient buffer space. The buffer is being used for mail send or Scan-to-Email.
15-14	Mail Header Format Error	The mail header is not standard format. For example, the Date line description is incorrect.
15-15	Mail Divide Error	The e-mail is not in standard format. There is no boundary between parts of the e-mail, including the header.
15-16	Mail Size Receive Error	The mail cannot be received because it is too large.
15-17	Receive Timeout	May occur during manual receiving only because the network is not operating correctly.
15-18	Incomplete Mail Received	Only one portion of the mail was received.

Code	Meaning	Suggested Cause/Action	
15-31	Final Destination for Transfer Request Reception Format Error	The format of the final destination for the transfer request was incorrect.	
15-39	Send/Delivery Destination Error	The transmission cannot be delivered to the final destination: Destination file format is incorrect. Could not create the destination for the file transmission.	
15-41	SMTP Receive Error	Reception rejected because the transaction exceeded the limit for the "Auth. E-mail RX" setting.	
15-42	Off Ramp Gateway Error	The delivery destination address was specified with Off Ramp Gateway OFF.	
15-43	Address Format Error	Format error in the address of the Off Ramp Gateway.	
15-44	Addresses Over	The number of addresses for the Off Ramp Gateway exceeded the limit of 30.	
15-61	Attachment File Format Error	The attached file is not TIFF format.	
15-62	TIFF File Compatibility Error	 Could not receive transmission due to: Resolution error Image of resolution greater than 200 dpi without extended memory. Resolution is not supported. Page size error The page size was larger than A3. Compression error File was compressed with other than MH, MR, or MMR. 	
15-63	TIFF Parameter Error	The TIFF file sent as the attachment could not be received because the TIFF header is incorrect: • The TIFF file attachment is a type not supported. • The TIFF file attachment is corrupted. • Software error.	
15-64	TIFF Decompression Error	The file received as an attachment caused the TIFF decompression error:	

Code	Meaning	Suggested Cause/Action
		The TIFF format of the attachment is corrupted.
		Software error.
15-71	Not Binary Image Data	The file could not be received because the attachment was not binary image data.
15-73	MDN Status Error	Could not find the Disposition line in the header of the Return Receipt, or there is a problem with the firmware.
15-74	MDN Message ID Error	Could not find the Original Message ID line in the header of the Return Receipt, or there is a problem with the firmware.
15-80	Mail Job Task Read Error	 Could not receive the transmission because the destination buffer is full and the destination could not be created (this error may occur when receiving a transfer request or a request for notification of reception).
15-81	Repeated Destination Registration Error	Could not repeat receive the transmission because the destination buffer is full and the destination could not be created (this error may occur when receiving a transfer request or a request for notification of reception).
		Could not receive the file for transfer to the final destination: • The format of the final destination or the transfer
15-91	Send Registration Error	destination is incorrect.
		Destinations are full so the final and transfer destinations could not be created.
15-92	Memory Overflow	Transmission could not be received because memory overflowed during the transaction.
15-93	Memory Access Error	Transaction could not complete due to a malfunction of SAF memory.
15-94	Incorrect ID Code	The machine rejected an incoming e-mail for transfer request, because the ID code in the incoming e-mail did not match the ID code registered in the machine.
15-95	Transfer Station Function	The machine rejected an incoming e-mail for transfer because the transfer function was unavailable.

Code	Meaning	Suggested Cause/Action
22-00	Original length exceeded the maximum scan length	 Divide the original into more than one page. Check the resolution used for scanning. Lower the scan resolution if possible. Add optional page memory.
22-01	Memory overflow while receiving	 Wait for the files in the queue to be sent. Delete unnecessary files from memory. Transfer the substitute reception files to an another fax machine, if the machine's printer is busy or out of order. Add an optional SAF memory card or hard disk.
22-02	Tx or rx job stalled due to line disconnection at the other end	 The job started normally but did not finish normally; data may or may not have been received fully. Restart the machine.
22-04	The machine cannot store received data in the SAF	Update the ROMReplace the FCU.
22-05	No G3 parameter confirmation answer	Defective FCU board or firmware.
23-00	Data read timeout during construction	Restart the machine.Replace the FCU.
25-00	The machine software resets itself after a fatal transmission error occurred	Update the ROMReplace the FCU.
F0-xx	V.34 modem error	Replace the FCU.
F6-xx	SG3 modem error	 Update the SG3 modem ROM. Replace the SG3 board. Check for line noise or other line problems. Try communicating another V.8/V.34 fax.

IFAX Troubleshooting

Use the following procedures to determine whether the machine or another part of the network is causing the problem.

Communication Route	Item	Action [Remarks]
General LAN	1. Connection with the LAN	Check that the LAN cable is connected to the machine. Check that the LEDs on the hub are lit.
	2. LAN activity	Check that other devices connected to the LAN can communicate through the LAN.
	1. Network settings on the PC	Check the network settings on the PC. [Is the IP address registered in the TCP/IP properties in the network setup correct? Check the IP address with the administrator of the network.]
Between IFAX and PC	2. Check that PC can connect with the machine	Use the "ping" command on the PC to contact the machine. [At the MS-DOS prompt, type ping then the IP address of the machine, then press Enter.]
	3. LAN settings in the machine	Check the LAN parameters Check if there is an IP address conflict with other PCs. [Use the "Network" function in the User Tools. If there is an IP address conflict, inform the administrator.]
Between machine and e-mail server	LAN settings in the machine	Check the LAN parameters Check if there is an IP address conflict with other PCs. [Use the "Network" function in the User Tools. If there is an IP address conflict, inform the administrator.]
Between machine and e-mail server	1. E-mail account on the server	Make sure that the machine can log into the e- mail server.

Communication Route	Item	Action [Remarks]
		Check that the account and password stored in the server are the same as in the machine. [Ask the administrator to check.]
	2. E-mail server	Make sure that the client devices which have an account in the server can send/receive e-mail. [Ask the administrator to check. Send a test e-mail with the machine's own number as the destination. The machine receives the returned e-mail if the communication is performed successfully.]
	1. E-mail account on the Server	 Make sure that the PC can log into the e-mail server. Check that the account and password stored in the server are the same as in the machine. [Ask the administrator to check.]
Between e-mail server and internet	2. E-mail server	Make sure that the client devices which have an account in the server can send/receive e-mail. [Ask the administrator to check. Send a test e-mail with the machine's own number as the destination. The machine receives the returned e-mail if the communication is performed successfully.]
	3. Destination e-mail address	 Make sure that the e-mail address is actually used. Check that the e-mail address contains no incorrect characters such as spaces.
Between e-mail server and internet	Router settings	 Use the "ping" command to contact the router. Check that other devices connected to the router can sent data over the router. [Ask the administrator of the server to check.]
Between e-mail server and internet	Error message by e- mail from the network of the destination.	Check whether e-mail can be sent to another address on the same network, using the application e-mail software. Check the error e-mail message. [Inform the administrator of the LAN.]

IP-Fax Troubleshooting

IP-Fax Transmission

Cannot send by IP Address/Host Name

Che	ck Point	Action	
1	LAN cable connected?	Check the LAN cable connection.	
2	Specified IP address/host name correct?	Check the IP address/host name.	
3	Firewall/NAT is installed?	Cannot breach the firewall. Send by using another method (Fax, Internet Fax)	
4	Transmission sent manually?	Manual sending not supported.	
5	IP address of local machine registered?	Register the IP address.	
6	Remote terminal port number setting other than 1720?	Send by specifying the port number.	
7	Specified port number correct?	Confirm the port number of the remote fax.	
8	DNS server registered when host name specified?	Contact the network administrator.	
9	Remote fax a T.38 terminal?	Check whether the remote fax is a T38 terminal.	
10	Remote fax switched off or busy?	Check that the remote fax is switched on.	
		Request the network administrator to increase the bandwidth.	
11	Network bandwidth too narrow?	Raise the delay level. IPFAX SW 01 Bit 0 to 3	
		IP-Fax bandwidth is the same as the DCS speed. Set IP-Fax SW00 Bit 6 to 1.	
12	Remote fax cancelled transmission?	Check whether the remote fax cancelled the transmission.	

3

Cannot send via VoIP Gateway

Che	ck Point	Action
1	LAN cable connected?	Check the LAN cable connection.
2	VoIP Gateway T.38 standard?	Contact the network administrator.
3	VoIP Gateway installed correctly?	Contact the network administrator.
4	VoIP Gateway power switched on?	Contact the network administrator.
5	Is the IP address/host name of the specified Gateway correct?	Check the IP address/host name.
6	Number of the specified fax correct?	Check the remote fax number.
7	Firewall/NAT is installed?	Cannot breach the firewall. Send by using another method (Fax, Internet Fax)
8	Transmission sent manually?	Manual sending not supported.
9	IP address of local fax registered?	Register the IP address.
10	DNS registered when host name specified?	Contact the network administrator.
11	Remote fax a G3 fax?	Check that the remote fax is a G3 fax.
12	G3 fax is connected to VoIP gateway?	Check that G3 fax is connected.
13	Remote G3 fax turned on?	Check that G3 fax is switched on.
		Request the network administrator to increase the bandwidth.
14	Network bandwidth too narrow?	Raise the network delay level. IPFAX SW 01 Bit 0 to 3
		IP-Fax bandwidth is the same as the DCS speed. Set IP-Fax SW00 Bit 6 to 1.

Cannot send by Alias Fax number.

Chec	ck Point	Action	
1 LAN cable connected?		Check the LAN cable connection.	

2	Number of specified Alias fax correct?	Confirm the Alias of the remote fax. Error Code: 13-14
3	Firewall/NAT installed?	Cannot breach the firewall. Send by using another method (Fax, Internet Fax)
4	Transmission sent manually?	Manual sending not supported.
5	Gatekeeper installed correctly?	Contact the network administrator.
6	Gatekeeper power switched on?	Contact the network administrator.
7	IP address/host name of Gatekeeper correct?	Check the IP address/host name.
8	DNS server registered when Gatekeeper host name specified?	Contact the network administrator.
9	Enable H.323 SW is set to on?	Check the settings. See User Parameter SW 34 Bit 0
10	IP address of local fax registered?	Register the IP address of the local fax.
11	Alias number of local fax registered?	Register the Alias number of the local fax.
12	Remote fax registered in Gatekeeper?	Contact the network administrator.
13	Remote fax a T.38 terminal?	Check whether the remote fax is a T38 terminal.
14	Remote fax switched off or busy?	Contact the network administrator.
		Request the system administrator to increase the bandwidth.
15	Network bandwidth too narrow?	Raise the delay level. IPFAX SW 01 Bit 0 to 3
		Lower the modem transmission baud rate. IPFAX SW 05
16	Remote fax cancelled transmission?	Check whether the remote fax cancelled the transmission.

IP-Fax Reception

Cannot receive by IP Address/Host name.

Check Point		Action
1	LAN cable connected?	Check the LAN cable connection.
2	Firewall/NAT is installed?	Cannot breach the firewall. Send by using another method (Fax, Internet Fax)
3	IP address of local fax registered?	Register the IP address.
4	Port number specified at remote sender fax (if required)?	Request the sender to specify the port number.
5	Specified port number correct (if required)?	Request the sender to check the port number.
6	DNS server registered when host name specified on sender side?	Contact the network administrator. Note The sender machine displays this error code if the sender fax is a Ricoh model.
7	Network bandwidth too narrow?	Request the system administrator to increase the bandwidth. Lower the start modem reception baud rate on the receiving side. IPFAX SW06
8	Remote fax cancelled transmission?	Check whether the remote fax cancelled the transmission.

Cannot receive by VoIP Gateway.

Check Point		ck Point	Action
	1 LAN cable connected?		Check the LAN cable connection.
			Cannot breach the firewall. Request the remote fax to send by using another method (Fax, Internet Fax)

3	VoIP Gateway installed correctly?	Contact the network administrator.
4	VoIP Gateway power switched on?	Contact the network administrator.
5	IP address/host name of specified VoIP Gateway correct on sender's side?	Request the remote fax to check the IP address/ host name.
6	DNS server registered when host name specified on sender side?	Contact the network administrator.
7	Network bandwidth too narrow?	Request the network administrator to increase the bandwidth.
8	G3 fax connected?	Check that G3 fax is connected.
9	G3 fax power switched on?	Check that G3 fax is switched on.

Cannot receive by Alias Fax number.

Check Point		Action
1	LAN cable connected?	Check the LAN cable connection.
2	Firewall/NAT is installed?	Cannot the breach firewall. Request the remote fax to send by using another method (Fax, Internet Fax)
3	Gatekeeper installed correctly?	Contact the network administrator. Note The sender machine displays this error code when the sender fax is a Ricoh model.
4	Power to Gatekeeper switched on?	Contact the network administrator. Note The sender machine displays this error code when the sender fax is a Ricoh model.
5	IP address/host name of Gatekeeper correct on the sender's side?	Request the sender to check the IP address/host name. Note The sender machine displays this error code when the sender fax is a Ricoh model.

6	DNS server registered when Gatekeeper host name specified on sender's side?	Contact the network administrator. Note The sender machine displays this error code when the sender fax is a Ricoh model.
7	Enable H.323 SW is set to on?	Request the sender to check the settings. User Parameter SW 34 Bit 0 Note Only if the remote sender fax is a Ricoh fax.
8	Local fax IP address registered?	Register the IP address.
9	Local fax Alias number registered?	Register the Alias number.
		Request the system administrator to increase the bandwidth.
10	Network bandwidth too narrow?	Lower the start modem reception baud rate on the receiving side. IPFAX SW06
11	Remote fax cancelled transmission?	Check whether the remote fax cancelled the transmission.
12	Local fax registered in Gatekeeper?	Contact the network administrator. Note The sender machine displays this error code when the sender fax is a Ricoh model.

4. Service Tables

Beforehand

ACAUTION

Never turn off the main power switch when the power LED is lit or flashing. To avoid damaging the
hard disk or memory, press the operation power switch to switch the power off, wait for the power
LED to go off, and then switch the main power switch off.



• The main power LED (** •) lights or flashes while the platen cover or ARDF is open, while the main machine is communicating with a facsimile or the network server, or while the machine is accessing the hard disk or memory for reading or writing data.

Service Tables

SP1-XXX (Bit Switches)

"Bit Switches"

1	Mode No.		Function	
	System Switch			
101	001 – 032	00 – 1F	Change the bit switches for system settings for the fax option ("Bit Switches")	
	Ifax Switch			
102	001 – 016	00 – 0F	Change the bit switches for internet fax settings for the fax option ("Bit Switches")	
	Printer Switch			
103	001 – 016	00 – 0F	Change the bit switches for printer settings for the fax option ("Bit Switches")	
	Communication Switch			
104	001 – 032	00 – 1F	Change the bit switches for communication settings for the fax option ("Bit Switches")	
	G3-1 Switch			
105	001 – 016	00 – 0F	Change the bit switches for the protocol settings of the standard G3 board ("Bit Switches")	
	IP fax Switch			
111	001 – 016	00 – 0F	Change the bit switches for optional IP fax parameters ("Bit Switches")	

SP2-XXX (RAM Data)

2	Mode No.		Function	
	RAM Read/Write			
101	001		Change RAM data for the fax board directly. ("Service RAM Addresses")	
	Memory Dump			
102	001	G3-1 Memory Dump	Print out RAM data for the fax board.	
			(☞ "Service RAM Addresses")	
	G3-1 NCU Pa	arameters		
103	001 – 023 CC, 01 – 22		NCU parameter settings for the standard G3 board. (• "NCU Parameters")	

SP3-XXX (Tel Line Settings)

3	Mode No.		Function
101	Service Station	n	
101	001	Fax Number	Enter the fax number of the service station.
102	Serial Numbe	r	
102	000		Enter the fax unit's serial number.
	PSTN-1 Port S	ettings	
	001	Select Line	Select the line type setting for the G3-1 line. If the machine is installed on a PABX line, select "PABX", "PABX(GND)" or "PABX(FLASH)".
103	002	PSTN Access Number	Enter the PSTN access number for the G3-1 line.
	003	Memory Lock Disabled	If the customer does not want to receive transmissions using Memory Lock on this line, turn this SP on.
107	IPFAX Port Settings		

	001	H323 Port	-
	002	SIP Port	-
	003	RAS Port	-
	004	Gatekeeper port	-
	005	T.38 Port	-
	006	SIP Server Port	-
	007	IPFAX Protocol Priority	Select "H323" or "SIP".
001	FAX SW		
201	001 – 032	00 – 1F	-

SP4-XXX (ROM Versions)

4	Mode No.		Function
101	002 – 007	FCU ROM Version	Displays the FCU ROM version.
102	002 – 065	Error Codes	Displays the latest 64 fax error codes.
103	002 – 004	G3-1 ROM Version	Displays the G3-1 modem version.

SP5-XXX (Initializing)

5	Mode No.	Function	
	Initialize SRAM		
101	Initializes the bit switches and user parameters, user data in the SRA files in the SAF memory, and clock.		
102	Erase All Files		
102	001	Erases all files stored in the SAF memory.	
103	Reset Bit Switches		
103	001 Resets the bit switches and user parameters.		

104	Factory setting		
	001	Resets the bit switches and user parameters, user data in the SRAM and files in the SAF memory.	
105	Reset All Bit Switches		
103	001	Initializes all the current bit switch settings.	
	Reset Security Bit Switches		
106	001	Initializes only the security bit switches. If you select automatic output/display for the user parameter switches, the security settings are initialized.	

SP6-XXX (Reports)

6	Mode No.		Function
	System Parameter List		
101	001	-	Touch the "ON" button to print the system parameter list.
	Service Mo	onitor	
102	001	-	Touch the "ON" button to print the service monitor report.
	G3 Protocol Dump List		
103	001	G3-1 (All Communications)	Prints the protocol dump list of all communications for the G3-1 line.
	002	G3-1 (1 Communication)	Prints the protocol dump list of the last communication for the G3-1 line.
	All Files print out		
105	001	-	Prints out all the user files in the SAF memory, including confidential messages. • Note • Do not use this function, unless the customer is having trouble printing confidential messages or

			recovering files stored using the memory lock feature.
	Journal Print out		
106	001	All Journals	The machine prints all the communication records on the report.
	002	Specified Date	The machine prints all communication records after the specified date.
	Log List Pr	int out	
	001	All log files	
	002	Printer	
	003	SC/TRAP Stored	
	004	Decompression	These log print out functions are for designer use only
	005	Scanner	
107	006	JOB/SAF	
	007	Reconstruction	
	008	JBIG	
	009	G3CCU	
	010	Fax Job	
	011	CCU	
	012	Scanner Condition	
	IP Protoco	ol Dump List	
108	001	All Communications	Prints the protocol dump list of all communications for the IP fax line.
	002	1 Communication	Prints the protocol dump list of the last communication for the IP fax line.

SP7-XXX (Test Modes)

These are the test modes for PTT approval.

7	Function
101	G3-1 Modem Tests
102	G3-1 DTMF Tests
103	Ringer Test
104	G3-1 V34 (S2400baud)
105	G3-1 V34 (S2800baud)
106	G3-1 V34 (S3000baud)
107	G3-1 V34 (S3200baud)
108	G3-1 V34 (S3429baud)
109	Message Test

WARNING

• Do not adjust a bit switch or use a setting that is described as "Not used", as this may cause the machine to malfunction or to operate in a manner that is not accepted by local regulations. Such bits are for use only in other areas, such as Japan.



• Default settings for bit switches are not listed in this manual. Refer to the System Parameter List printed by the machine.

System Switches

Syste	System Switch 00 [SP No. 1-101-001]			
No	FUNCTION	COMMENTS		
0	Dedicated transmission parameter programming O: Disabled, 1: Enabled	Set this bit to 1 before changing any dedicated transmission parameters. Reset this bit to 0 after programming dedicated transmission parameters.		
1	Not used	Do not change		
	Technical data printout on the Journal 0: Disabled 1: Enabled	1: Instead of the personal name, the following data are listed on the Journal for each G3 communication.		
2	e.g. 0000 (1) // 32 (2) V34 (3) // 288 (4) // 264 (5) // L0100 (6) 03 (7) 04 (8) (1): EQM value (Line quality data). A larger number means more errors. (2): Symbol rate (V.34 only) (3): Final modem type used (4): Starting data rate (for example, 288 means 28.8 kbps) (5): Final data rate (6): Rx revel (refer to the note after this table for how to read the rx level)			
	(7): Total number of error lines that occurred during non-ECM reception. (8): Total number of burst error lines that occurred during non-ECM reception.			

4



- EQM and rx level are fixed at "FFFF" in tx mode.
- The seventh and eighth numbers are fixed at "00" for transmission records and ECM reception records.

Rx level calculation

Example: 0000 // 32 V34 // 288/264 // L01 00 03 04

The four-digit hexadecimal value (N) after "L" indicates the rx level.

The high byte is given first, followed by the low byte. Divide the decimal value of N by -16 to get the rx level.

In the above example, the decimal value of N = 0100 [H] is 256.

So, the actual rx level is 256/-16 = -16 dB

3	Not used	Do not change this setting.	
4	Line error mark print 0: OFF, 1: ON (print)	When "1" is selected, a line error mark is printed on the printout if a line error occurs during reception.	
5	G3/G4 communication parameter display 0: Disabled 1: Enabled	This is a fault-finding aid. The LCD shows the key parameters (see below). This is normally disabled because it cancels the CSI display for the user. Be sure to reset this bit to 0 after testing.	
6	Protocol dump list output after each communication 0: Off 1: On	This is only used for communication troubleshooting. It shows the content of the transmitted facsimile protocol signals. Always reset this bit to 0 after finishing testing. If system switch 09 bit 6 is at "1", the list is only printed if there was an error during the communication.	
7	Not used	Do not change the setting.	

System Switch 01 - Not used (Do not change the factory settings.)

Syste	System Switch 02 [SP No. 1-101-003]		
No	Function	Comments	
0-1	Not used	Do not change these settings.	
2	Force after transmission stall O: Off	With this setting on, the machine resets itself automatically if a transmission stalls and fails to complete the job.	

	1: On	
3-5	Not used	Do not change these settings.
6-7	Memory read/write by RDS	(0,0): All RDS systems are always locked out.
	Bit 7: 0, Bit 6: 0	(0, 1), (1, 0): Normally, RDS systems are locked out, but the
	Always disabled	user can temporarily switch RDS on to allow RDS
	Bit 7: 0, Bit 6: 1	operations to take place. RDS will automatically be locked out again after a certain time, which is stored in System
	User selectable	Switch 03. Note that if an RDS operation takes place, RDS
	Bit 7: 1, Bit 6: 0	will not switch off until this time limit has expired.
	User selectable	(1,1): At any time, an RDS system can access the machine.
	Bit 7: 1, Bit 6: 1	
	Always enabled	

System Switch 03 [SP No. 1-101-004]			
No	FUNCTION	COMMENTS	
0-7	Length of time that RDS is temporarily switched on when bits 6 and 7 of System Switch 02 are set to "User selectable"	00 - 99 hours (BCD). This setting is only valid if bits 6 and 7 of System Switch 02 are set to "User selectable". The default setting is 24 hours.	

System Switch 04 [SP No. 1-101-005]		
No	FUNCTION	COMMENTS
0-2	Not used	Do not change these settings.
3	Printing dedicated tx parameters on Quick/Speed Dial Lists 0: Disabled 1: Enabled	1: Each Quick/Speed dial number on the list is printed with the dedicated tx parameters (10 bytes each). The first 10 bytes of data are the programmed dedicated tx parameters; 34 bytes of data are printed (the other 24 bytes have no use for service technicians).
4-7	Not used	Do not change these settings.

System Switch 05 - Not used (Do not change the factory settings.)

System Switch 06 - Not used (Do not change the factory settings.)

System Switch 07 - Not used (Do not change the factory settings.)

System Switch 08 - Not used (Do not change the factory settings.)

Syste	System Switch 09 [SP No. 1-101-010]		
No	FUNCTION	COMMENTS	
0	Not used	Do not change these settings.	
1	Inclusion of communications on the Journal when no image data was exchanged. O: Disabled 1: Enabled	O: Communications that reached phase C (message tx/rx) of the T.30 protocol are listed on the Journal. 1: Communications that reached phase A (call setup) of T. 30 protocol are listed on the Journal. This will include telephone calls.	
2	Automatic error report printout O: Disabled 1: Enabled	O: Error reports will not be printed. 1: Error reports will be printed automatically after failed communications.	
3	Printing of the error code on the error report 0: No 1: Yes	1: Error codes are printed on the error reports.	
4	Not used	Do not change this setting.	
5	Power failure report 0: Disabled 1: Enabled	1: A power failure report will be automatically printed after the power is switched on if a fax message disappeared from the memory when the power was turned off last.	
6	Conditions for printing the protocol dump list O: Print for all communications 1: Print only when there is a communication error	This switch becomes effective only when system switch 00 bit 6 is set to 1. 1: Set this bit to 1 when you wish to print a protocol dump list only for communications with errors.	
7	Priority given to various types of remote terminal ID when printing reports O: RTI > CSI > Dial label > Tel. Number 1: Dial label > Tel. number > RTI > CSI	This bit determines which set of priorities the machine uses when listing remote terminal names on reports. Dial Label: The name stored, by the user, for the Quick/ Speed Dial number.	

Syste	System Switch 0A [SP N0. 1-101-011]		
No	Function	Comments	
0-3	Not used	Do not change these settings.	
4	Dialing on the ten-key pad when the external telephone is off-hook O: Disabled 1: Enabled	O: Prevents dialing from the ten-key pad while the external telephone is off-hook. Use this setting when the external telephone is not by the machine, or if a wireless telephone is connected as an external telephone. 1: The user can dial on the machine's ten-key pad when the handset is off-hook.	
5	On hook dial 0: Disabled 1: Enabled	0: On hook dial is disabled.	
6-7	Not used	Do not change the factory settings	

System Switch OB - Not used (Do not change the factory settings.)

System Switch OC - Not used (Do not change the factory settings.)

System Switch OD - Not used (Do not change the factory settings.)

Syste	System Switch OE [SP No. 1-101-015]		
No	FUNCTION	COMMENTS	
0-1	Not used	Do not change the settings.	
2	Not used	This machine does not have the capture function.	
3	Action when the external handset goes off-hook O: Manual tx and rx operation 1: Memory tx and rx operation (the display remains the same)	O: Manual tx and rx are possible while the external handset is off-hook. However, memory tx is not possible. 1: The display stays in standby mode even when the external handset is used, so that other people can use the machine for memory tx operation. Note that manual tx and rx are not possible with this setting.	
4-7	Not used	Do not change these settings.	

System	System Switch OF [SP No. 1-101-016]	
No	Function	Comments

0-7	Country/area code fo	or functional settings (Hex)
	00: France	11: USA
	01: Germany	12: Asia
	02: UK	13: Japan
	03: Italy	14: Hong Kong
	04: Austria	15: South Africa
	05: Belgium	16: Australia
	06: Denmark	17: New Zealand
	07: Finland	18: Singapore
	08: Ireland	19: Malaysia
	09: Norway	1A: China
	0A: Sweden	1B: Taiwan
	OB: Switz.	1C: Korea
	OC: Portugal	20: Turkey
	0D: Holland	21: Greece
	0E: Spain	22: Hungary
	OF: Israel	23: Czech
	10:	24: Poland

This country/area code determines the factory settings of bit switches and RAM addresses. However, it has no effect on the NCU parameter settings and communication parameter RAM addresses.

Cross reference

NCU country code:

SP No. 2-103-001 for G3-1

System Switch 10 [SP No. 1-101-017]		
No	FUNCTION	COMMENTS
	T	Threshold = N x 128 KB + 256 KB
0-7	Threshold memory level for parallel memory transmission	N can be between 00 - FF(H)
		Default setting: 02(H) = 512 KB

Syste	m Switch 11 [SP No. 1-101-018]	
No	FUNCTION	COMMENTS

0	TTI printing position 0: Superimposed on the page data 1: Printed before the data leading edge	Change this bit to 1 if the TTI overprints information that the customer considers to be important (G3 transmissions).
1	Not used	Japan Only
2-7	Not used	Do not change the factory settings.

Syste	System Switch 12 [SP No. 1-101-019]		
No	FUNCTION	COMMENTS	
		TTI: 08 to 92 (BCD) mm Input even numbers only.	
0-7	TTI printing position in the main scan direction	This setting determines the print start position for the TTI from the left edge of the paper. If the TTI is moved too far to the right, it may overwrite the file number which is on the top right of the page. On an A4 page, if the TTI is moved over by more than 50 mm, it may overwrite the page number.	

System Switch 13 - Not used (do not change these settings)

System Switch 14 - Not used (do not change these settings)

Syste	System Switch 15 [SP No. 1-101-022]		
No	FUNCTION	COMMENTS	
0	Not used	Do not change the settings.	
1	Going into the Energy Saver mode automatically 0: Enabled 1: Disabled	1: The machine will restart from the Energy Saver mode quickly, because the +5V power supply is active even in the Energy Saver mode.	
2-3	Not used	Do not change these settings.	
4-5	Interval for preventing the machine from entering Energy Saver mode if there is a pending transmission file. Bit 5: 0, Bit 4: 0	If there is a file waiting for transmission, the machine does not go to Energy Saver mode during the selected period. After transmitting the file, if there is no file waiting for transmission, the machine goes to the Energy Saver mode.	

	1 min	
	Bit 5: 0, Bit 4: 1	
	30 min 1	
	Bit 5: 1, Bit 4: 0	
	1 hour Bit 5: 1, Bit 4: 1	
	24 hours	
6-7	Not used	Do not change

No Function Comments O Parallel Broadcasting O: Disabled 1: Enabled 1-7 Not used Do not change these settings.

System Switch 17 - Not used (do not change these settings)

System Switch 18 - Not used (do not change these settings)

System	System Switch 19 [SP No. 1-101-026]				
No	FUNCTION	COMMENTS			
0-6	Not used	Do not change the settings.			
7	Special Original mode 0: Disabled 1: Enabled	1: If the customer frequently wishes to transmit a form or letterhead which has a colored or printed background, change this bit to "1". "Original 1" and "Original 2" can be selected in addition to the "Text", "Text/Photo" and "Photo" modes.			

System Switch 1A - Not used (do not change these settings)

System Switch 1B [SP No. 1-101-028]

In this switch setting, there is a limitation. Do not select the same image quality in two modes.

e.g) these setting combination is not allowed:

[Bit1: 0, Bit 0: 0 = **Text**] [Bit3: 0, Bit 2:0 = Text/ Photo] [Bit 6: 0, Bit 5: 0, Bit 4: 0 = **Text**]

No.	FUNCTION			4	COMMENTS
0-1	Image Quality in Text mode Bit 1: 0, Bit 0: 0 = Text/ Picture Bit 1: 0, Bit 0: 1 = Text			This setting determines the desirable scanning image quality when the text mode is selected with the operation panel.	
2-3	Image Quality in Photo mode Bit 3: 0, Bit 2: 0 = Photo/ Diffusion Bit 3: 0, Bit 2: 1 = Photo/ Dithering		/ Diffusion	This setting determines the desirable scanning image quality when the photo mode is selected with the operation panel.	
	Image Quality in Special Original mode		al Original	This setting determines the desirable scanning image quality when the special original mode is selected with the operation panel.	
	Bit 6	Bit 5	Bit 4	Mode	е
	0	0	0	Text	
4-6	0	0	1	Text/ Sh	parp
	0	1	0	Text/ Diff	usion
	0	1	1	Photo/ Ditl	hering
	1	0	0	Dropout o	color
	1	0	1	-	
7	Not used Do no			Dor	not change these settings.

System Switch 1C - Not used (do not change these settings)

System	System Switch 1D [SP No. 1-101-030]				
No	FUNCTION	COMMENTS			
0	RTI/CSI/CPS code display 0: Enable 1: Disable	O: RTI, CSI, CPS codes are displayed on the top line of the LCD panel during communication. 1: Codes are switched off (no display)			
1	Not used	Do not change this setting.			

2	Destination telephone number display limitation 0: OFF, 1: ON	When "1" is selected, the destination telephone number display is limited and redial is disabled.
3	Operation selection without PIN code registered 0: Transmission interrupted 1: No interrupted transmission	O: When "O" is selected without PIN code registration, transmission is interrupted and an alert message shows on the LCD.
 1-7	Not used	Do not change these settings.

Syste	System Switch 1E [SP No. 1-101-031]			
No	FUNCTION	COMMENTS		
	Communication after the Journal data storage area has become full 0: Impossible 1: Possible	O: When this switch is on and the journal history becomes full, the next report prints. If the journal history is not deleted, the next transmission cannot be received. This prevents overwriting communication records before the machine can print them.		
0		1: If the buffer memory of the communication records for the Journal is full, fax communications are still possible. But the machine will overwrite the oldest communication records.		
		Note: This setting is effective only when Automatic Journal printout is enabled but the machine cannot print the report (e.g., no paper).		
1	Action when the SAF memory has become full during scanning 0: The current page is erased. 1: The entire file is erased.	O: If the SAF memory becomes full during scanning, the successfully scanned pages are transmitted. 1: If the SAF memory becomes full during scanning, the file is erased and no pages are transmitted.		
		This bit switch is ignored for parallel memory transmission.		
2	RTI/CSI display priority 0: RTI 1: CSI	This bit determines which identifier, RTI or CSI, is displayed on the LCD while the machine is communicating in G3 non-standard mode.		
3	File No. printing 0: Enabled 1: Disabled	1: File numbers are not printed on any reports.		

4	Action when authorized reception is enabled but authorized RTIs/CSIs are not yet programmed 0: All fax reception is disabled 1: Faxes can be received if the sender has an RTI or CSI	If authorized reception is enabled but the user has stored no acceptable sender RTIs or CSIs, the machine will not be able to receive any fax messages. If the customer wishes to receive messages from any sender that includes an RTI or CSI, and to block messages from senders that do not include an RTI or CSI, change this bit to "1", then enable Authorized Reception. Otherwise, keep this bit at "0 (default setting)".
5-7	Not used	Do not change the settings

Syste	System Switch 1F [SP No. 1-101-032]				
No	FUNCTION	COMMENTS			
0	Not used	Do not change the settings.			
1	Report printout after an original jam during SAF storage or if the SAF memory fills up 0: Enabled 1: Disabled	O: When an original jams, or the SAF memory overflows during scanning, a report will be printed. Change this bit to "1" if the customer does not want to have a report in these cases. Memory tx – Memory storage report Parallel memory tx – Transmission result report			
2	Not used	Do not change the settings.			
3	Received fax print start timing (G3 reception) 0: After receiving each page 1: After receiving all pages	O: The machine prints each page immediately after the machine receives it. 1: The machine prints the complete message after the machine receives all the pages in the memory.			
4-6	Not used	Do not change the factory settings.			
7	Action when a fax SC has occurred 0: Automatic reset 1: Fax unit stops	O: When the fax unit detects a fax SC code other than SC1201 and SC1207, the fax unit automatically resets itself. 1: When the fax unit detects any fax SC code, the fax unit stops. Cross Reference Fax SC codes - See "Troubleshooting"			

I-Fax Switches

I-fax	I-fax Switch 00 [SP No. 1-102-001]			
	FUNCTION	COMMENTS		
No	Original Width of TX Attachment File	This setting sets the maximum size of the original that the destination can receive. (Bits 3~7 are reserved for future use or not used.)		
0	A4	O: Off (not selected), 1: On (selected)		
1	B4	If more than one of these three bits is set to "1", the larger size has priority. For example, if both Bit 2 and Bit 1 are set to "1"		
2	A3	then the maximum size is "A3" (Bit 2).		
3-6	Reserved	When mail is sent, there is no negotiation with the receiving machine at the destination, so the sending machine cannot make		
7	Not used	a selection for the receiving capabilities (original width setting) of the receiving machine. The original width selected with this switch is used as the RX machine's original width setting, and the original is reduced to this size before sending. The default is A4. If the width selected with this switch is higher than the receiving		
		machine can accept, the machine detects this and this causes an error.		

I-fax	I-fax Switch 01 [SP No. 1-102-002]				
	FUNCTION	COMMENTS			
No	Original Line Resolution of TX Attachment File	These settings set the maximum resolution of the original that the destination can receive.			
0	200x100 Standard				
1	200x200 Detail				
2	200x400 Fine	0: Not selected 1: Selected			
3	300 x 300 Reserve	If more than one of these three bits is set to "1", the higher			
4	400 x 400 Super Fine	resolution has priority. For example, if both Bit 0 and Bit 2 are set to "1" then the resolution is set for "Bit 2 200 x 400.			
5	600 x 600 Reserve	are series in mentine resolution is series bill 2 200 x 400.			
6	Reserve				

mm/inch

This setting selects mm/inch conversion for mail transmission.

0: Off (No conversion), 1: On (Conversion)

When on (set to "1"), the machine converts millimeters to inches for sending mail. There is no switch for converting inches to millimeters.

Unlike G3 fax transmissions which can negotiate between sender and receiver to determine the setting, mail cannot negotiate between terminals; the mm/inch selection is determined by the sender fax.

When this switch is Off (0):

Images scanned in inches are sent in inches.

Images scanned in mm are sent in mm.

Images received in inches are transmitted in inches.

Images received in mm are transmitted in mm.

When this switch is On (1):

Images scanned in inches are sent in inches.

Images scanned in mm are converted to inches.

Images received in inches are transmitted in inches.

Images received in mm are converted to inches.

I-fax	I-fax Switch 02 [SP No. 1-102-003]		
No	FUNCTION	COMMENTS	
	RX Text Mail Header Processing		
	This setting determines whether the header information is printed with text e-mails when they are received.		
	O: Prints only text mail.		
0	1: Prints mail header information attached to text mail.		
	When a text mail is received with this switch On (1), the "From" address and "Subject" address are printed as header information.		
	s received (a TIFF-F file, for example), this setting is ignored		
Output from Attached Document at E-mail TX Error		E-mail TX Error	
1	This setting determines whether only the first page or all pages of an e-mail attachment are printed at the sending station when a transmission error occurs. This allows the customer to see which		

documents have not reached their intended destinations if sent to the wrong e-mail addresses, for example.

O: Prints 1st page only.

1: Prints all pages.

Text String for Return Receipt

This setting determines the text string output for the Return Receipt that confirms the transmission was received normally at the destination.

00: "Dispatched"

Sends from PC mail a request for a Return Receipt. Receives the Return Receipt with "dispatched" in the 2nd part:

Disposition: Automatic-action/MDN-send automatically; dispatched

The "dispatched" string is included in the Subject string.

2-3 01: "Displayed"

Sends from PC mail a request for a Return Receipt. Receives the Return Receipt with "displayed" in the 2nd part:

Disposition: Automatic-action/MDN-send automatically; displayed

The "displayed" string is included in the Subject string.

10: Reserved

11: Reserved

Return Receipt.

A mail requesting a Return Receipt sent from an IFAX with this switch set to "00" (for "dispatched") received by Microsoft Outlook 2000 may cause an error. If any setting other than "displayed" (01) causes a problem, change the setting to "01" to enable normal sending of the

Media accept feature

This setting adds or does not add the media accept feature to the answer mail to confirm a reception.

4 0: Does not add the media accept feature to the answer mail

1: Adds the media accept feature to the answer mail.

Use this bit switch if a problem occurs when the machine receives an answer mail, which contains the media accept feature field.

5-6 Not Used

Image Resolution of RX Text Mail

This setting determines the image resolution of the received mail.

0: 200 x 200

1: 400 x 400

The "1" setting requires installation of the Function Upgrade Card in order to have enough SAF (Store and Forward) memory to receive images at 400×400 resolution.

I-fax Switch 03 - Not used (do not change the settings) [SP No. 1-102-004]

I-fax	I-fax Switch 04 [SP No. 1-102-005]			
No	FUNCTION	COMMENTS		
	Subject for Delivery TX/Memory Transfer			
		This setting determines whether the RTI/CSI registered on this machine or the RTI/CSI of the originator is used in the subject lines of transferred documents.		
0	O: Puts the RTI/CSI of the originator of Only one of these can be received for	in the Subject line. If this is used, either the RTI or CSI is used. or use in the subject line.		
	1: Puts the RTI/CSI registered on this	s machine in the Subject line.		
		and deliver mail to a PC, the information in the Subject line originated can be used to determine automatically the		
	Subject corresponding to mail post of	Hatabase		
	0: Standard subject	0: Standard subject		
	1: Mail post database subject	1: Mail post database subject		
	The standard subject is replaced by the mail post database subject in the following three cases:			
	1) When the service technician sets the service (software) switch.			
1	2) When memory sending, delivery specified by F code or SMTP reception is done.			
	3) With relay broadcasting (1st stage without the Schmidt 4 function).			
	Note			
	 This switch does not apply for condition 3) when the RX system is set up for memory sending, delivery by F-code, sending with SMTP RX and when operators are using FOL (to prevent problems when receiving transmissions). 			
2-7	Not Used			

Comment

No

I-fax Switch 05 [SP No. 1-102-006]

Function

0	Mail Addresses of SMTP Broadcast Re	ecipients		
	Determines whether the e-mail addresses of the destinations that receive transmissions broadcasted using SMTP protocol are recorded in the Journal.			
	For example:			
	"1st destination + Total number of destinations: 9" in the Journal indicates a broadce destinations.			
	0: Not recorded	Not recorded		
	1: Recorded			
1	I-Fax Automatic Re-dial Setting	Determines whether the I-fax automatically redials		
	0: OFF	when an error occurs.		
	1: ON			
2-7	Not used			

I-fax Switch 06 - Not used (do not change the settings) [SP No. 1-102-007]

I-fax Switch 07 - Not used (do not change the settings) [SP No. 1-102-008]

I-fax Switch 08 [SP No. 1-102-009]				
No	No FUNCTION COMMENTS			
	Memory Threshold for POP Mail Reception			
0-7	This setting determines the amount of SAF (Store and Forward) memory. (SAF stores fax messages to send later for transmission to more than one location, and also holds incoming messages if they cannot be printed.) When the amount of SAF memory available falls below this setting, mail can no longer be received; received mail is then stored on the mail server.			
	00-FF (0 to 1024 KB: HEX)			
	Note			
	The hexadecimal number you enter is multiplied by 4 KB to determine the amount of memory.			

I-fax	I-fax Switch 09 [SP No. 1-102-010]			
No	FUNCTION COMMENTS			
0-3	Not used	Do not change the settings		

4-7	Restrict TX Retries	This setting determines the number of retries when connection and transmission fails due to errors.	
		01-F (1-15 Hex)	

I-fax Switch OA - Not used (do not change the settings) [SP No. 1-102-011]

I-fax Switch OB - Not used (do not change the settings) [SP No. 1-102-012]

I-fax Switch OC - Not used (do not change the settings) [SP No. 1-102-013]

I-fax Switch OD - Not used (do not change the settings) [SP No. 1-102-014]

I-fax Switch OE - Not used (do not change the settings) [SP No. 1-102-015]


I-fax Switch OF [SP No. 1-102-016]				
No	o FUNCTION COMMENTS			
	Delivery Method for SMTP RX Files			
0	This setting determines whether files received with SMTP protocol are delivered or output immediately.			
	0: Off. Files received via SMTP are output immediately without delivery.			
	1: On. Files received via SMTP are delivered immediately to their destinations.			
1-7	Not used			

Printer Switches

Printe	Printer Switch 00 [SP No. 1-103-001]			
No	FUNCTION	COMMENTS		
0	Select page separation marks 0: Off 1: On	O: If a 2 page RX transmission is split, [*] is printed in the bottom right corner of the 1st page and only a [2] is printed in the upper right corner of the 2nd page. 1: If a 2 page RX transmission is split into two pages, for example, [*] [2] is printed in the bottom right corner of the 1st page and only a [2] is printed in the upper right corner of the 2nd page.		

		 This helps the user to identify pages that have been split because the size of the paper is smaller than the size of the document received. (When A5 is used to print an A4 size document, for example.)
1	Repetition of data when the received page is longer than the printer paper O: Off 1: On	1: Default. 10 mm of the trailing edge of the previous page are repeated at the top of the next page. 0: The next page continues from where the previous page stopped without any repeated text.
2	Prints the date and time on received fax messages O: Disabled 1: Enabled	This switch is only effective when user parameter 02 - bit 2 (printing the received date and time on received fax messages) is enabled. 1: The machine prints the received and printed date and time at the bottom of each received page.
3-7	Not used	Do not change the settings.

Printe	Printer Switch 01 [SP No. 1-103-002]			
No	FUNCTION	COMMENTS		
0-2	Not used	Do not change the settings.		
3-4	Maximum print width used in the setup protocol Bit 4: 0, Bit 3: 0 = Not used Bit 4: 0, Bit 3: 1 = A3 Bit 4: 1, Bit 3: 0 = B4 Bit 4: 1, Bit 3: 1 = A4	These bits are only effective when bit 7 of printer switch 01 is "1".		
5-6	Not used	Do not change the settings.		
7	Received message width restriction in the protocol signal to the sender O: Disabled 1: Enabled	O: The machine informs the transmitting machine of the print width depending on the paper size available from the paper feed stations. Refer to the table on the next page for how the machine chooses the paper width used in the setup protocol (NSF/DIS).		



Printe	er Switch 02 [SP No. 1-103-003]	
No	FUNCTION	COMMENTS
0	1 st paper feed station usage for fax printing 0: Enabled 1: Disabled	
1	2nd paper feed station usage for fax printing 0: Enabled 1: Disabled	O: The paper feed station can be used to print fax messages and reports. 1: The specified paper feed station will not be used for printing fax messages and reports.
2	3rd paper feed station usage for fax printing 0: Enabled 1: Disabled	 Note Do not disable usage for a paper feed station which has been specified by User Parameter Switch OF (15), or which is used for the Specified Cassette Selection feature.
3	4th paper feed station usage for fax printing 0: Enabled 1: Disabled	
4-7	Not used	Do not change the settings.

Printe	Printer Switch 03 [SP No. 1-103-004]			
No	FUNCTION COMMENTS			
0	Length reduction of received data 0: Disabled 1: Enabled	O: Incoming pages are printed without length reduction. (Page separation threshold: Printer Switch 03, bits 4 to 7) 1: Incoming page length is reduced when printing. (Maximum reducible length: Printer Switches 04, bits 0 to 4)		
1-3	Not used	Do not change the settings		

		Page separation threshold (with reduction disabled with switch 03-0 above).
	Page separation setting when sub scan compression is forbidden	For example, if this setting is set to "10", and A4 is the selected paper size:
4-7	00-0F (0-15 mm: Hex)	If the received document is 10 mm or less longer than A4,
	Default: 6 mm	then the 10 mm are cut and only 1 page prints.
		If the received document is 10 mm longer than A4, then the document is split into 2 pages.

Printe	Printer Switch 04 [SP No. 1-103-005]					
No	FUNCTION			COMMENTS		
	<maximum red<="" td=""><td colspan="5">Maximum reducible length when length reduction is enabled with switch 03-0 above. Maximum reducible length> = <paper length=""> + (N x 5mm) "N" is the decimal value of the binary setting of bits 0 to 4.</paper></td></maximum>	Maximum reducible length when length reduction is enabled with switch 03-0 above. Maximum reducible length> = <paper length=""> + (N x 5mm) "N" is the decimal value of the binary setting of bits 0 to 4.</paper>				
	Bit 4	Bit 3	Bit 2	Bit 1	Bit O	Setting
	0	0	0	0	0	O mm
0-4	0	0	0	0	1	5 mm
	0	0	1	0	0	20 mm
	1	1	1	1	1	155 mm
	For A5 sideways and B5 sideways paper <maximum length="" reducible=""> = <paper length=""> + 0.75 x (N x 5mm)</paper></maximum>					
	Length of the duplicated image on the next page, when page separation has taken place.					
	Bit 6: 0, Bit 5: 0 = 4 mm					
5-6	Bit 6: 1, Bit 5: 0 = 10 mm					
	Bit 6: 0, Bit 5: 1 = 15 mm					
	Bit 6: 1, Bit 5: 1 = Not used					
7	Not used.		Do not ch	ange the setting.		

Printer Switch 05 - Not used (do not change the settings)

Printer Switch 06 [SP No. 1-103-007]

No	FUNCTION	COMMENTS		
0	Printing while a paper cassette is pulled out, when the Just Size Printing feature is enabled. O: Printing will not start 1: Printing will start if another cassette has a suitable size of paper, based on the paper size selection priority tables.	Cross reference Just size printing on/off – User switch 05, bit 5		
1-7	Not used.	Do not change the settings.		

Printer Switch 07 [SP No. 1-103-008]			
No	FUNCTION	COMMENTS	
0-3	Not used.	Do not change the settings.	
4	List of destinations in the Communication Failure Report for broadcasting 0: All destinations 1: Only destinations where communication failure occurred	1: Only destinations where communication failure occurred are printed on the Communication Failure Report.	
5-7	Not used.	Do not change the settings.	

Printer Switch 08 - Not used (do not change the settings)		
Printer Switch 09 - Not used (do not change the settings)		
Printer Switch OA - Not used (do not change the settings)		
Printer Switch OB - Not used (do not change the settings)		
Printer Switch OC - Not used (do not change the settings)		
Printer Switch OD - Not used (do not change the settings)		

Printer Switch OE [SP No. 1-103-015]		
No	FUNCTION	COMMENTS

0	Paper size selection priority 0: Width 1: Length	O: A paper size that has the same width as the received data is selected first. 1: A paper size which has enough length to print all the received lines without reduction is selected first.
1	Paper size selected for printing A4 width fax data 0: 8.5" x 11" size 1: A4 size	This switch determines which paper size is selected for printing A4 width fax data, when the machine has both A4 and 8.5" x 11" size paper.
2	Page separation 0: Enabled 1: Disabled	1: If all paper sizes in the machine require page separation to print a received fax message, the machine does not print the message (Substitute Reception is used). After a larger size of paper is set in a cassette, the machine automatically prints the fax message.
3-4	Printing the sample image on reports Bit 4: 0, Bit 3: 0 = The upper half only Bit 4: 0, Bit 3: 1 = 50% reduction in sub-scan only Bit 4: 1, Bit 3: 0 = Same size Bit 4: 1, Bit 3: 1 = Not used	"Same size" means the sample image is printed at 100%, even if page separation occurs. User Parameter Switch 19 (13H) bit 4 must be set to "0" to enable this switch. Refer to Detailed Section Descriptions for more on this feature.
5-6	Not used	Do not change the settings.
7	Equalizing the reduction ratio among separated pages (Page Separation) O: Enabled 1: Disabled	O: When page separation has taken place, all the pages are reduced with the same reduction ratio. 1: Only the last page is reduced to fit the selected paper size when page separation has taken place. Other pages are printed without reduction.

Printe	Printer Switch OF [SP No. 1-103-016]		
No	FUNCTION	COMMENTS	

0-1	Smoothing feature	
	Bit 1: 0 Bit 0: 0 = Disabled	(0, 0) (0, 1): Disable smoothing if the machine receives
	Bit 1: 0 Bit 0: 1 = Disabled	halftone images from other manufacturers fax machines
	Bit 1: 1 Bit 0: 0 = Enabled	frequently.
	Bit 1: 1 Bit 0: 1 = Not used	
2-7	Not used	Do not change the settings.

Communication Switches

Communication Switch 00 [SP No. 1-104-001]			
No	FUNCTION	COMMENTS	
0-1	Compression modes available in receive mode Bit 1: 0 Bit 0: 0 = MH only Bit 1: 0 Bit 0: 1 = MH/MR Bit 1: 1 Bit 0: 0 = MH/MR/MMR Bit 1: 1 Bit 0: 1 = MH/MR/MMR/JBIG	These bits determine the compression capabilities to be declared in phase B (handshaking) of the T.30 protocol.	
2-3	Compression modes available in transmit mode Bit 3: 0 Bit 2: 0 = MH only Bit 3: 0 Bit 2: 1 = MH/MR Bit 3: 1 Bit 2: 0 = MH/MR/MMR Bit 3: 1 Bit 2: 1 = MH/MR/MMR/JBIG	These bits determine the compression capabilities to be used in the transmission and to be declared in phase B (handshaking) of the T.30 protocol.	
4	Not used	Do not change the settings.	
5	JBIG compression method: Reception 0: Only basic supported 1: Basic and optional both supported	Change the setting when communication problems occur using JBIG compression.	

6	JBIG compression method: Transmission 0: Basic mode priority 1: Optional mode priority	Change the setting when communication problems occur using JBIG compression.
7	Not used	Do not change the settings.

Communication Switch 01 [SP No. 1-104-002]		
No	FUNCTION	COMMENTS
0	ECM 0: Off 1: On	If this bit is set to 0, ECM is switched off for all communications. In addition, V.8 protocol and JBIG compression are
		switched off automatically.
1-5	Not used	Do not change the setting.
6-7	Maximum printable page length available	
	Bit 7: 0 Bit 6: 0 = No limit	The setting determined by these bits is informed to the
	Bit 7: 0 Bit 6: 1 = B4 (364 mm)	transmitting terminal in the pre-message protocol exchange (in the DIS/NSF frames).
	Bit 7: 1 Bit 6: 0 = A4 (297 mm)	in the Bisy i to mainesy.
	Bit 7: 1 Bit 6: 1 = Not used	

Communication Switch 02 [SP No. 1-104-003]			
No	FUNCTION	COMMENTS	
	G3 Burst error threshold 0: Low 1: High	page than t	more consecutive error lines in the received the threshold, the machine will send a negative he Low and High threshold values depend on n resolution, and are as follows.
0		100 dpi	6(L) → 12(H)
		200 dpi	12(L) → 24(H)
		300 dpi	18(L) → 36(H)
		400 dpi	24(L) → 48(H)

1	Acceptable total error line ratio 0: 5% 1: 10%	If the error line ratio for a page exceeds the acceptable ratio, RTN will be sent to the other end.
2	Treatment of pages received with errors during G3 reception O: Deleted from memory without printing 1: Printed	O: Pages received with errors are not printed.
3	Hang-up decision when a negative code (RTN or PIN) is received during G3 immediate transmission O: No hang-up, 1: Hang-up	O: The next page will be sent even if RTN or PIN is received. 1: The machine will send DCN and hang up if it receives RTN or PIN. This bit is ignored for memory transmissions or if ECM is being used.
4-7	Not used	Do not change the settings.

Communication Switch 03 [SP No. 1-104-004]			
No	No FUNCTION COMMENTS		
0-7	Maximum number of page retransmissions in a G3 memory transmission	00 - FF (Hex) times. This setting is not used if ECM is switched on. Default setting - 03(H)	

Communication Switch 04 - Not used (do not change the settings)		
Communication Switch 05 - Not used (do not change the settings)		
Communication Switch 06 - Not used (do not change the settings)		
Communication Switch 07 - Not used (do not change the settings)		
Communication Switch 08 - Not used (do not change the settings)		

Communication Switch 09 [SP No. 1-104-010]			
No	TOMMENTS		
		Adjusts the interval of the I-fax dialing.	
0-7	I-Fax dial interval setting	The interval of I-fax dialing is calculated by following formula.	

	[Interval time = specified value with this switch x 2 sec]

Communication Switch OA [SP No. 1-104-011]		
No	FUNCTION COMMENTS	
0	Point of resumption of memory transmission upon redialing 0: From the error page 1: From page 1	O: The transmission begins from the page where transmission failed the previous time. 1: Transmission begins from the first page, using normal memory transmission.
1-7	Not used	Do not change the settings.

Communication Switch OB - Not used (do not change the settings)

Communication Switch OC – Not used (do not change the settings)

Communication Switch OD [SP No. 1-104-014]		
No	o FUNCTION COMMENTS	
	The available memory threshold, below which ringing detection (and therefore reception into memory) is disabled	00 to FF (Hex), unit = 4 kbytes
		(e.g., 06(H) = 24 kbytes)
		One page is about 24 kbytes.
0-7		The machine refers to this setting before each fax reception. If the amount of remaining memory is below this threshold, the machine cannot receive any fax messages.
		If this setting is kept at 0, the machine will detect ringing signals and go into receive mode even if there is no memory available. This will result in communication failure.

Communication Switch OE [SP No. 1-104-015]			
No FUNCTION		COMMENTS	
0-7	Minimum interval between automatic dialing attempts	06 to FF (Hex), unit = 2 s (e.g., 06(H) = 12 s) This value is the minimum time that the machine waits before it dials the next destination.	

Communication Switch 10 [SP No. 1-104-017] No FUNCTION COMMENTS O-7 Memory transmission: Maximum number of dialing attempts to the same destination O1 – FE (Hex) times

Communication Switch 11 - Not used (do not change the settings.)

Communication Switch 12 [SP No. 1-104-019]			
No	FUNCTION	COMMENTS	
0-7	Memory transmission: Interval between dialing attempts to the same destination	01 – FF (Hex) minutes	

Communication Switch 13 - Not used (do not change the settings.)

Comi	Communication Switch 14 [SP No. 1-104-021]				
No	FUNCTION	COMMENTS			
	Inch-to-mm conversion during transmission O: Disabled 1: Enabled	0: In immediate transmission, data scanned in inch format are transmitted without conversion.			
		In memory transmission, data stored in the SAF memory in mm format are transmitted without conversion.			
0		Note: When storing the scanned data into SAF memory, the fax unit always converts the data into mm format.			
		1: The machine converts the scanned data or stored data in the SAF memory to the format which was specified in the set-up protocol (DIS/NSF) before transmission.			
1-5	Not used	Do not change the factory settings.			
6-7	Available unit of resolution in which fax messages are received Bit 7: 0, Bit 6: 0 = mm	For the best performance, do not change the factory settings.			

4

Bit 7: 0, Bit 6: 1 = inch

Bit 7: 1, Bit 6: 0 = mm and inch (default)

Bit 7: 1, Bit 6: 1 = Not used

The setting determined by these bits is informed to the transmitting terminal in the pre-message protocol exchange (in the DIS/NSF frames).

Communication Switch 15 – Not used (do not change the settings)

Communication Switch 16 – Not used (do not change the settings)

Communication Switch 17 – Not used (do not change the settings)

Communication Switch 18 - Not used (do not change the settings)

Communication Switch 19 - Not used (do not change the settings)

Communication Switch 1A - Not used (do not change the settings)

Communication Switch 1B [SP No. 1-104-028]			
No FUNCTION		COMMENTS	
0-7	Extension access code (0 to 7) to turn V.8 protocol On/Off 0: On 1: Off	If the PABX does not support V.8/V.34 protocol procedure, set this bit to "1" to disable V.8. Example: If "0" is the PSTN access code, set bit 0 to 1. When the machine detects "0" as the first dialed number, it automatically disables V.8 protocol. (Alternatively, if "3" is the PSTN access code, set bit 3 to 1.)	

Comi	Communication Switch 1C [SP No. 1-104-029]				
No	FUNCTION	COMMENTS			
0-1	Extension access code (8 and 9) to turn V.8 protocol On/Off 0: On 1: Off	Refer to communication switch 1B. Example: If "8" is the PSTN access code, set bit 0 to 1. When the machine detects "8" as the first dialed number, it automatically disables V.8 protocol. (If "9" is the PSTN access code, use bit 1.)			
2-7	Not used	Do not change the settings.			

Communication Switch 1D - Not used (do not change the settings)

Communication Switch 1E - Not used (do not change the settings)

Communication Switch 1F - Not used (do not change the settings)

G3-1 Switches

G3 S	G3 Switch 00 [SP No. 1-105-001]				
No	FUNCTION	COMMENTS			
0-1	Monitor speaker during communication (tx and rx) Bit 1: 0, Bit 0: 0 = Disabled Bit 1: 0, Bit 0: 1 = Up to Phase B Bit 1: 1, Bit 0: 0 = All the time Bit 1: 1, Bit 0: 1 = Reserved	 (0, 0): The monitor speaker is disabled all through the communication. (0, 1): The monitor speaker is on up to phase B in the T.30 protocol. (1, 0): Used for testing. The monitor speaker is on all through the communication. Make sure that you reset these bits after testing. 			
2	Monitor speaker during memory transmission O: Disabled 1: Enabled	1: The monitor speaker is enabled during memory transmission.			
3-7	Not used	Do not change the settings.			

G3 S	G3 Switch 01 [SP No. 1-105-002]				
No	FUNCTION	COMMENTS			
0-1	Not used	Do not change the settings.			
2-3	Not used	Do not change the settings.			
4	DIS frame length 0: 10 bytes 1: 4 bytes	1: The bytes in the DIS frame after the 4th byte will not be transmitted (set to 1 if there are communication problems with PC-based faxes which cannot receive the extended DIS frames).			
5	Not used	Do not change the setting.			
6	Forbid CED/AMsam output 0: Off 1: On (Forbid output)	Do not change this setting (Default: 0: Off), unless communication problem is caused by a CED or ANSam transmission.			
7	Not used	Do not change the setting.			

G3 Switch 02 [SP No. 1-105-003]				
No	FUNCTION	COMMENTS		
0	G3 protocol mode used 0: Standard and non-standard 1: Standard only	Change this bit to 1 only when the other end can only communicate with machines that send T.30-standard frames only. 1: Disables NSF/NSS signals (these are used in non-standard mode communication)		
1-6	Not used	Do not change the settings.		
7	Short preamble 0: Disabled 1: Enabled	Refer to Appendix B in the Group 3 Facsimile Manual fo details about Short Preamble.		

G3 Switch 03 [SP No. 1-105-004]					
No	FUNCTION	COMMENTS			
0	DIS detection number (Echo countermeasure) 0: 1 1: 2	O: The machine will hang up if it receives the same DIS frame twice. 1: Before sending DCS, the machine will wait for the second DIS which is caused by echo on the line.			
1	Not Used	Do not change the settings.			
2	V.8 protocol 0: Disabled 1: Enabled	0: V.8/V.34 communications will not be possible. Note: Do not set to 0 unless the line condition is always bad enough to slow down the data rate to 14.4 kbps or lower.			
3	ECM frame size 0: 256 bytes 1: 64 bytes	Keep this bit at "0" in most cases.			
4	CTC transmission conditions O: After one PPR signal received 1: After four PPR signals received (ITU-T standard)	0: When using ECM in non-standard (NSF/NSS) mode, the machine sends a CTC to drop back the modem rate after receiving a PPR, if the following condition is met in communications at 14.4, 12.0, 9.6, and 7.2 kbps. ✓ NTransmit ≤ NResend NTransmit- Number of transmitted frames			

		NResend- Number of frames to be retransmitted
		1: When using ECM, the machine sends a CTC to drop back the modem rate after receiving four PPRs.
		PPR, CTC: These are ECM protocol signals.
		This bit is not effective in V.34 communications.
5	Modem rate used for the next page after receiving a negative code (RTN or PIN) 0: No change 1: Fallback	1: The machine's tx modem rate will fall back before sending the next page if a negative code is received. This bit is ignored if ECM is being used.
6	Not Used	Do not change the settings
7	Select detection of reverse polarity in ringing 0: Off 1: On	This switch is used to prevent reverse polarity in ringing on the phone line (applied to PSTN-G3 ringing). Do not change this setting 0: No detection → Outside Japan 1: Detection → Inside Japan only

G3 Switch 04 [SP No. 1-105-005]			
No	Function	Comments	
0-3	Training error detection threshold	0 - F (Hex); 0 - 15 bits If the number of error bits in the received TCF is below this threshold, the machine informs the sender that training has succeeded.	
4-7	Not used	Do not change the settings.	

G3 S	G3 Switch 05 [SP No. 1-105-006]					
No	No FUNCTION					COMMENTS
	Initial Tx modem rate					These bits set the initial starting modem rate for
	Bit 3	Bit 2	Bit 1	Bit O	bps	transmission. Use the dedicated transmission parameters if you need
0-3	0	0	0	1	2.4k	to change this for specific receivers.
	0	0	1	0	4.8k	If a modem rate 14.4 kbps or slower is selected, V.8 protocol should be disabled manually.
	0	0	1	1	7.2k	Cross reference

	0	1	0	0	9.6k	
	0	1	0	1	12.0k	
	0	1	1	0	14.4k	
	0	1	1	1	16.8k	
	1	0	0	0	19.2k	
	1	0	0	1	21.6k	V.8 protocol on/off - G3 switch 03, bit2
	1	0	1	0	24.0k	v.o prolocol only on - G5 switch 05, bitz
	1	0	1	1	26.4k	
	1	1	0	0	28.8k	
	1	1	0	1	31.2k	
	1	1	1	0	33.6k	
	Other	settings	- Not u	sed		
	Initial kbps.	modem	type fo	r 9.6 k	or 7.2	
, -	Bit 5: (D, Bit 4:	0 = V.2	29		These bits set the initial modem type for 9.6 and 7.2 kbps, if the initial modem rate is set at these speeds.
4-5	Bit 5: (O, Bit 4:	1 = V.1	7		
	Bit 5:	1, Bit 4:	0 = V.3	34		
	Bit 5:	1, Bit 4:	1 = Re	served		
6-7	Not us	sed				Do not change the settings.

G3 S	G3 Switch 06 [SP No. 1-105-007]								
No			FUNC	TION		COMMENTS			
	Initial	Rx mod	em rate			These bits set the initial starting modem rate for			
	Bit 3	Bit 2	Bit 1	Bit O	bps	reception. • Use a lower setting if high speeds pose			
0-3	0	0	0	1	2.4k	problems during reception.			
	0	0	1	0	4.8k	If a modem rate 14.4 kbps or slower is selected, V.8 protocol should be disabled			
	0	0	1	1	7.2k	manually. Cross reference:			

	0	1	0	0	9.6k		
	0	1	0	1	12.0k		
	0	1	1	0	14.4k		
	0	1	1	1	16.8k		
	1	0	0	0	19.2k	V.8 protocol on/off - G3 switch 03, bit2	
	1	0	0	1	21.6k		
	1	0	1	0	24.0k	v.o prolocol only on Go switch Go, bill2	
	1	0	1	1	26.4k		
	1	1	0	0	28.8k		
	1	1	0	1	31.2k		
	1	1	1	0	33.6k		
	Other	settings	- Not u	sed			
	Mode	m types	availak	ole for r	eception		
	Bit 7	Bit 6	Bit 5	Bit 4	Setting		
	0	0	0	1	V.27ter		
	0	0	1	0	V.27ter, V.29	The setting of these bits is used to inform the transmitting terminal of the available modem	
4-7	0	0	1	1	V.27ter, V. 29, V.33	type for the machine in receive mode. • If V.34 is not selected, V.8 protocol must be	
	0	1	0	0	V.27ter, V. 29, V.17/ V.33	disabled manually. Cross reference: V.8 protocol on/off - G3 switch 03, bit2	
	0	1	0	1	V.27ter, V. 29, V.17/ V33, V.34		
	Other	settings	- Not u	sed			

G3 Switch 07 [SP No. 1-105-008]

No	FUNCTION	COMMENTS
0-1	PSTN cable equalizer (tx mode: Internal) Bit 1: 0, Bit 0: 0 = None Bit 1: 0, Bit 0: 1 = Low Bit 1: 1, Bit 0: 0 = Medium Bit 1: 1, Bit 0: 1 = High	Use a higher setting if there is signal loss at higher frequencies because of the length of wire between the modem and the telephone exchange. Use the dedicated transmission parameters for specific receivers. Also, try using the cable equalizer if one or more of the following symptoms occurs. Communication error Modem rate fallback occurs frequently. • This setting is not effective in V.34 communications.
2-3	PSTN cable equalizer (rx mode: Internal) Bit 3: 0, Bit 2: 0 = None Bit 3: 0, Bit 2: 1 = Low Bit 3: 1, Bit 2: 0 = Medium Bit 3: 1, Bit 2: 1 = High	Use a higher setting if there is signal loss at higher frequencies because of the length of wire between the modem and the telephone exchange. Also, try using the cable equalizer if one or more of the following symptoms occurs. Communication error with error codes such as 0-20, 0-23, etc. Modem rate fallback occurs frequently. • This setting is not effective in V.34 communications.
4	PSTN cable equalizer (V.8/V.17 rx mode: External) 0: Disabled 1: Enabled	Keep this bit at "1".
5	Not used	Do not change the settings.
6	Parameter selection for dial tone detection O: Normal parameter 1: Specific parameter	0: This uses the fixed table in the ROM for dial tone detection. 1: This uses the specific parameter adjusted with SRAM (69ECBEH - 69ECDEH). Select this if the dial tone cannot be detected when the "Normal parameter: 0" is selected.
7	Not used	Do not change the settings.

G3 Switch 08 - Not used (do not change the settings)

G3 Switch 09 - Not used (do not change the settings)

G3 Sw	G3 Switch 0A [SP No. 1-105-011]						
No	FUNCTION	COMMENTS					
	Maximum allowable carrier drop during image data reception						
0.1	Bit 1: 0, Bit 0: 0 = 200	These bits set the acceptable modem carrier drop time.					
0-1	Bit 1: 0, Bit 0: 1 = 400	Try using a longer setting if error code 0-22 is frequent.					
	Bit 1: 1, Bit 0: 0 = 800						
	Bit 1: 1, Bit 0: 1 = Reserved						
2	Select cancellation of high-speed RX if carrier signal lost while receiving 0: Off 1: On	This switch setting determines if high-speed receiving ends if the carrier signal is lost when receiving during non-ECM mode					
3	Not used	Do not change the settings					
4	Maximum allowable frame interval during image data reception. 0: 5 s 1: 13 s	This bit set the maximum interval between EOL (end-of-line) signals and the maximum interval between ECM frames from the other end. Try using a longer setting if error code 0-21 is frequent.					
5	Not used	Do not change the settings.					
6	Reconstruction time for the first line in receive mode 0: 6 s 1: 12 s	When the sending terminal is controlled by a computer, there may be a delay in receiving page data after the local machine accepts set-up data and sends CFR. This is outside the T.30 recommendation. But, if this delay occurs, set this bit to 1 to give the sending machine more time to send data. Refer to error code 0-20. ITU-T T.30 recommendation: The first line should come within 5 s of CFR.					
7	Not used	Do not change the settings.					

G3 Switch OB Not used (do not change the settings).

G3 Switch OC Not used (do not change the settings).

G3 Switch 0D Not used (do not change the settings).

G3 S	G3 Switch OE [SP No 1-105-015]						
	Set CNG send time interval Some machines on the receiving side interval.	e may not be able to automatically switch the 3-second CNG					
0-7	High order bit	3000-2250ms: 3000-50xNms 3000 – 50 x Nms 0F (3000 ms) ≤ N ≤ FF (2250 ms)					
	Low order bit	00-0E(3000-3700ms: 3000+50xNms 3000 – 50 x Nms 0F (3000 ms) ≤ N ≤ 0F (3700 ms)					

G3 S	G3 Switch OF [SP No. 1-105-016]					
No	FUNCTION	COMMENTS				
0	Alarm when an error occurred in Phase C or later 0: Disabled 1: Enabled	If the customer wants to hear an alarm after each error communication, change this bit to "1".				
1	Alarm when the handset is off-hook at the end of communication O: Disabled 1: Enabled	If the customer wants to hear an alarm if the handset is off-hook at the end of fax communication, change this bit to "1".				
2-3	Not used	Do not change the settings.				
4	Sidaa manual calibration setting 0: Off 1: On	manually calibrates for communication with a line, whose current change occurs such as an optical fiber line.				
5-6	Not used	Do not change the settings.				

IP Fax Switches

IP Fax Switch 00 [SP No. 1-111-001]						
No.	FUNCTION	COMMENTS				
0	Not used	Do not change this setting.				
1	IP Fax Transport 0: TCP, 1: UDP	Selects TCP or UDP protocol for IP-Fax				
2	IP Fax single port selection 0: OFF, 1: ON (enable)	Selects single data port.				
3	IP Fax double ports (single data port) selection 0: OFF, 1: ON (enable)	Selects whether IP-Fax uses a double port.				
4	IP Fax Gatekeeper 0: OFF, 1: ON (enable)	Enables/disables the communication via the gatekeeper for IP-Fax.				
5	IP Fax T30 bit signal reverse O: LSB first, 1: MSB first	Reverses the T30 bit signal.				
6	IP Fax max bit rate setting O: Not affected, 1: Affected	When "0" is selected, the max bit rate does not affect the value of the DIS/DCS. When "1" is selected, the max bit rate affects the value of the DIS/DCS.				
7	IP Fax received telephone number confirmation O: No confirmation, 1: Confirmation	When "0" is selected, fax data is received without checking the telephone number. When "1" is selected, fax data is received only when confirming that the telephone number from the sender matches the registered telephone number in this machine. If this confirmation fails, the line is disconnected.				

IP-Fax	IP-Fax Switch 01 [SP No. 1-111-002]							
No.	FUNCTION	COMMENTS						

	Select	IP FAX	Delay l	.evel		Raise the level by selecting a higher setting if too
0-3	Bit3	Bit2	Bit1	BitO	Setting	many transmission errors are occurring on the network.
	0	0	0	0	Level 0	If TCP/UDP is enabled on the network, raise this
	0	0	0	1	Level 1	setting on the T.30 machine. Increasing the delay time allows the recovery of more lost packets.
	0	0	1	0	Level 2	If only UDP is enabled, increase the number of
	0	0	1	1	Level 3	redundant packets. Level 1 to 2: 3 Redundant packets
						Level 3: 4 Redundant packets
						Selects the preamble wait time.
						[00 to 0f]
4-7	IP Fax	preaml	ole wait	time se	etting	There are 16 values in this 4-bit binary switch combination.
						Waiting time: set value level x 100 ms
						Max: Of (1500 ms) Min: 00 (No wait time)
						The default is "0000" (00H).

IP Fax	IP Fax Switch 02 [SP No. 1-111-003]						
No.	FUNCTION	COMMENTS					
0	IP Fax bit signal reverse setting O: Maker code setting 1: Internal bit switch setting	When "0" is selected, the bit signal reverse method is decided by the maker code. When "1" is selected, the bit signal reverse method is decided by the internal bit switch. (When communicating between IP Fax devices, LSB first is selected.)					
1	IP Fax transmission speed setting 0: Modem speed 1: No limitation	Selects the transmit speed for IP Fax communication.					
2	SIP transport setting 0: TCP 1: UDP	This bit switch sets the transport that has priority for receiving IP Fax data. This function is activated only when the sender has both TCP and UDP.					

3	CCM connection 0: No CCM connection 1: CCM connection	When "1" is selected, only the connection call message with H.323 or no tunneled H.245 is transmitted via CCM.
4	Message reception selection from non-registered SIP server 0: Answer 1: Not answer	O: This answers the INVITE message from the SIP server not registered for the machine. 1: This does not receive the INVITE message from the SIP server not registered for the machine and send a refusal message.
5	ECM communication setting 0: No limit for image compression 1: Limit for image compression	O: This does not limit the type of the image compression with ECM communication. 1: When the other end machine is Ciscco, this permits the image compression other than JBIG or MMR with ECM communication.
6-7	Not used	Do not change these settings.

IP Fax	P Fax Switch 03 [SP No. 1-111-004]				
No.	FUNCTION	COMMENTS			
0	Effective field limitation for G3 standard function information 0: OFF, 1: 4byte (DIS)	Limits the effective field for standard G3 function information.			
1	Switching between G3 standard and G3 non standard 0: Enable switching 1: G3 standard only	Enables/disables switching between G3 standard and G3 non-standard.			
2	Not used.	Do not change this setting.			
3	ECM frame size selection at transmitting 0: 256byte, 1: 64byte	Selects the ECM frame size for sending.			
4	DIS detection times for echo prevention 0: 1 time, 1: 2 times	Sets the number of times for DIS to detect echoes.			
5	CTC transmission selection 0: PPRx1 1: PPRx4	When "0" is selected, the transmission condition is decided by error frame numbers.			

		When "1" is selected, the transmission condition is based on the ITU-T method.
6	Shift down setting at receiving negative code 0: OFF, 1: ON	Selects whether to shift down when negative codes are received.
7	Not used	Do not change this setting.

IP Fax	IP Fax Switch 04 [SP No. 1-111-005]					
No.	FUNCTION	COMMENTS				
0						
1	TCF error threshold	Sets the TCF error threshold level.				
2		[00 to 0f] The default is "1111" (0fH).				
3						
4-7	Not used	Do not change these settings.				

IP Fax	Switch 05 [SP No. 1-111-006]								
No.	FUNCTION			COMMENTS					
		Modem bit rate setting for transmission Sets the modem bit rate for transmission. The default is "0110" (14.4K bps).							
	Bit 4	Bit 3		Bit 2	Bit 1				
	0	0		0	1	2400 bps			
	0	0		1	1	4800 bps			
0-3	0	0		1	1	7200 bps			
	0	1		0	0	9600 bps			
	0	1		0	1	12.0 Kbps			
	0	1		1	0	14.4 Kbps			
	0	1		1	1	16.8 Kbps			
	1	0		0	0	19.2 Kbps			

	1	0	0	1	21.6 Kbps		
	1	0	1	0	24.0 Kbps		
	1	0	1	1	26.4 Kbps		
	1	1	0	0	28.8 Kbps		
	1	1	0	1	31.2 Kbps		
	1	1	1	0	33.6 Kbps		
	Modem setting for transmission						
	Sets the modem for transmission.						
	The default is "00" (V29).						
4.5	Bit 5: 0, Bit 4: 0 = V29						
4-5	Bit 5: 0, Bit 4: 1 = V17						
	Bit 5: 1, Bit 4: 0 = V34*						
	Bit 5: 1, Bit 4: 1 = Not used						
	*V34 is not sup	ported for IP-Fax co	ommunication.				
6-7	Not used Do not change these settings.				gs.		

IP Fax	IP Fax Switch 06 [SP No. 1-111-007]								
No.	FUNCTION			COMMENTS					
		Modem bit rate setting for reception Sets the modem bit rate for reception. The default is "0110" (14.4K bps).							
	Bit 3	Bit 2		Bit 1	Bit O				
	0	0		0	1	2400 bps			
	0	0		1	0	4800 bps			
0-3	0	0		1	1	7200 bps			
	0	1		0	0	9600 bps			
	0	1		0	1	12.0 Kbps			
	0	1		1	0	14.4 Kbps			
	0	1		1	1	16.8 Kbps			

	1	0	0	0	19.2 Kbps		
	1	0	0	1	21.6 Kbps		
	1	0	1	0	24.0 Kbps		
	1	0	1	1	26.4 Kbps		
	1	1	0	0	28.8 Kbps		
	1	1	0	1	31.2 Kbps		
	1	1	1	0	33.6 Kbps		
		type for reception.			/29, V17).		
	Bit 7	Bit 6	Bit 5	Bit 4			
	0	0	0	1	V27ter		
	0	0	1	0	V27ter, V29		
4-7	0	0	1	1	V27ter, V29, V33 (invalid)		
	0	1	0	0	V27ter, V29, V17		
	0	1	0	1	V27ter, V29, V17, V34*		
	*V34 is not sup	ported for IP-Fax co	ommunication.				

IP Fax	P Fax Switch 07 [SP No. 1-111-008]				
No.	FUNCTION	COMMENTS			
0	TSI information 0: Not added, 1: Added	Adds or does not add TSI information to NSS(S).			
1	DCN transmission setting at T1 timeout 0: Not transmitted, 1: Transmitted	Transmits or does not transmit DCN at T1 timeout.			
2	Not used	Do not change this setting.			

3	Hang up setting at DIS reception disabled 0: No hang up 1: Hang up after transmitting DCN	Sets whether the machine disconnects after DIS reception.
4	Number of times for training 0: 1 time, 1: 2 times	Selects the number of times training is done at the same bit rate.
5	Space CSI transmission setting at no CSI registration O: Not transmitted, 1: Transmitted	When "0" is selected, frame data is enabled. When "1" is selected, the transmitted data is all spaces.
6-7	Not used	Do not change these settings.

IP Fax	Switch 08 [SP No. 1-111-009]	
No.	FUNCTION	COMMENTS
0-1	T1 timer adjustment Adjusts the T1 timer. The default is "00" (35 seconds). Bit 1: 0, Bit 0: 0 = 35 sec Bit 1: 0, Bit 0: 1 = 40 sec Bit 1: 1, Bit 0: 0 = 50 sec Bit 1: 1, Bit 0: 1 = 60 sec	-
2-3	T4 timer adjustment Adjust the T4 timer. The default is "00" (3 seconds). Bit 3: 0, Bit 2: 0 = 3 sec Bit 3: 0, Bit 2: 1 = 3.5 sec Bit 3: 1, Bit 2: 0 = 4 sec Bit 3: 1, Bit 2: 1 = 5 sec	-
4-5	T0 timer adjustment Bit 5: 0, Bit 4: 0 = 75 sec Bit 5: 0, Bit 4: 1 = 120 sec	Adjusts the fail safe timer. This timer sets the interval between "setup" data transmission and T.38 phase decision. If your destination return is late on the

	Bit 5: 1, Bit 4: 0 = 180 sec Bit 5: 1, Bit 4: 1 = 240 sec	network or G3 fax return is late, adjust the longer interval timer. The default is "00" (75 seconds).
6-7	Not used	Do not change these settings.

Address

The following tables give the RAM addresses and the parameter calculation units that the machine uses for ringing signal detection and automatic dialing. The factory settings for each country are also given. Most of these must be changed by RAM read/write (SP2-102), but some can be changed using NCU Parameter programming (SP2-103); if SP2-103 can be used, this will be indicated in the Remarks column. The RAM is programmed in hex code unless (BCD) is included in the Unit column.

Function

Address	Function								
	Country/Area co	Country/Area code for NCU parameters							
		Use the Hex value to program the country/area code directly into this address, or use the decimal value to program it using SP2-103-001							
	Country /Area	Decimal	Hex	Country /Area	Decimal	Hex			
	France	00	00	USA	17	11			
	Germany	01	01	Asia	18	12			
	UK	02	02	Hong Kong	20	14			
	Italy	03	03	South Africa	21	15			
	Austria	04	04	Australia	22	16			
680500	Belgium	05	05	New Zealand	26	17			
	Denmark	06	06	Singapore	24	18			
	Finland	07	07	Malaysia	25	19			
	Ireland	08	08	China	26	1A			
	Norway	09	09	Taiwan	27	1 B			
	Sweden	10	0A	Korea	28	1C			
	Switzerland	11	ОВ	Turkey	32	20			
	Portugal	12	0C	Greece	33	21			
	Holland	13	OD	Hungary	34	22			
	Spain	14	OE	Czech	35	23			

4

Address	Function					
	Israel	15	OF	Poland	36	24

Address	Function	Unit	Remarks	
680501	Line current detection time		Line current detection is	
680502	Line current wait time	20 ms	disabled. Line current is not detected if	
680503	Line current drop detect time		680501 contains FF.	
680504	PSTN dial tone frequency upper limit (high byte)	Hz (BCD)	If both addresses contain FF (H), tone detection is	
680505	PSTN dial tone frequency upper limit (low byte)	HZ (BCD)	disabled.	
680506	PSTN dial tone frequency lower limit (high byte)	H= (BCD)	If both addresses contain FF	
680507	PSTN dial tone frequency lower limit (low byte)	Hz (BCD)	(H), tone detection is disabled.	
680508	PSTN dial tone detection time			
680509	PSTN dial tone reset time (LOW)		If 680508 contains FF(H), the machine pauses for the	
68050A	PSTN dial tone reset time (HIGH)		pause time (address 68050D / 68050E).	
68050B	PSTN dial tone continuous tone time	20 ms	Italy: See Note 2.	
68050C	PSTN dial tone permissible drop time		·	
68050D	PSTN wait interval (LOW)			
68050E	PSTN wait interval (HIGH)		-	
68050F	PSTN ring-back tone detection time	20 ms	Detection is disabled if this contains FF.	
680510	PSTN ring-back tone off detection time	20 ms	-	
680511	PSTN detection time for silent period after ring-back tone detected (LOW)	20 ms	-	
680512	PSTN detection time for silent period after ring-back tone detected (HIGH)		-	

Address	Function	Unit	Remarks
680513	PSTN busy tone frequency upper limit (high byte)	- Hz (BCD)	If both addresses contain FF (H), tone detection is
680514	PSTN busy tone frequency upper limit (low byte)	TIZ (BCD)	disabled.
680515	PSTN busy tone frequency lower limit (high byte)	H- (BCD)	If both addresses contain FF (H), tone detection is
680516	PSTN busy tone frequency lower limit (low byte)	Hz (BCD)	disabled.
680517	PABX dial tone frequency upper limit (high byte)	H- (BCD)	If both addresses contain FF
680518	PABX dial tone frequency upper limit (low byte)	Hz (BCD)	(H), tone detection is disabled.
680519	PABX dial tone frequency lower limit (high byte)		If both addresses contain FF
68051A	PABX dial tone frequency lower limit (low byte)	Hz (BCD)	(H), tone detection is disabled.
68051B	PABX dial tone detection time		If 68051B contains FF, the
68051C	PABX dial tone reset time (LOW)		
68051D	PABX dial tone reset time (HIGH)		machine pauses for the pause time (680520 /
68051E	PABX dial tone continuous tone time	20 ms	680521).
68051F	PABX dial tone permissible drop time		
680520	PABX wait interval (LOW)		
680521	PABX wait interval (HIGH)		-
680522	PABX ringback tone detection time		If both addresses contain FF
680523	PABX ringback tone off detection time		(H), tone detection is disabled.
PABX detection time for silent period after ringback tone detected (LOW)		20 ms	If both addresses contain FF (H), tone detection is disabled.

Address	Function	Unit	Remarks		
680525	PABX detection time for silent period after ringback tone detected (HIGH)	20 ms			
680526	PABX busy tone frequency upper limit (high byte)		If both addresses contain FF (H), tone detection is		
680527	PABX busy tone frequency upper limit (low byte)	Hz (BCD)	disabled.		
680528	PABX busy tone frequency lower limit (high byte)	II (DCD)	If both addresses contain FF		
680529	PABX busy tone frequency lower limit (low byte)	Hz (BCD)	(H), tone detection is disabled.		
68052A	Busy tone ON time: range 1				
68052B	Busy tone OFF time: range 1				
68052C	Busy tone ON time: range 2	20 ms			
68052D	Busy tone OFF time: range 2				
68052E	Busy tone ON time: range 3		-		
68052F	Busy tone OFF time: range 3				
680530	Busy tone ON time: range 4				
680531	Busy tone OFF time: range 4	20 ms			
680532	Busy tone continuous tone detection time				
Busy tone signal state time tolerance for all ranges, and number of cycles re detection (a setting of 4 cycles means that ON-OFF-ON or OFF-ON-OFF n detected twice).					
	Tolerance (±)				
680533	Bit 1: 0, Bit 0: 0 = 75% Bits 2 and 3 must always be kept at 0. Bit 1: 0, Bit 0: 0 = 50% Bits 2 and 3 must always be kept at 0.				
	Bit 1: 0, Bit 0: 0 = 25%	amaya sa kapi	u. v.		
	Bit 1: 0, Bit 0: 0 = 12.5%				
	Bits 7, 6, 5, 4 - number of cycles require	d for cadence de	etection		

Address	Function	Unit	Remarks	
680534	International dial tone frequency upper limit (high byte)	H= (BCD)	If both addresses contain FF	
680535	International dial tone frequency upper limit (low byte)	Hz (BCD)	(H), tone detection is disabled.	
680536	80536 International dial tone frequency lower limit (high byte)		If both addresses contain FF	
680537	International dial tone frequency lower limit (low byte)	Hz (BCD)	(H), tone detection is disabled.	
680538	International dial tone detection time			
680539	International dial tone reset time (LOW)		If 680538 contains FF, the	
68053A	International dial tone reset time (HIGH)		machine pauses for the pause time (68053D / 68053E). Belgium: See Note 2.	
68053B	International dial tone continuous tone time	20 ms		
68053C	International dial tone permissible drop time			
68053D	68053D International dial wait interval (LOW)			
68053E	International dial wait interval (HIGH)		-	
68053F	Country dial tone upper frequency limit (HIGH)		If both addresses contain FF (H), tone detection is disabled. If both addresses contain FF (H), tone detection is disabled.	
680540	Country dial tone upper frequency limit (LOW)	11. (0.00)		
680541	Country dial tone lower frequency limit (HIGH)	Hz (BCD)		
680542	Country dial tone lower frequency limit (LOW)			
680543	,		If 680543 contains FF, the	
680544			machine pauses for the pause time (680548 /	
680545	Country dial tone reset time (HIGH)		680549).	
680546	Country dial tone continuous tone time	-	-	

Address	Function	Unit	Remarks
680547	Country dial tone permissible drop time		
680548	Country dial wait interval (LOW)	20 ms	-
680549	Country dial wait interval (HIGH)		
68054A	Time between opening or closing the DO relay and opening the OHDI relay	1 ms	See Notes 3, 6 and 8. SP2-103-012 (parameter 11).
68054B	Break time for pulse dialing	1 ms	See Note 3. SP2-103-013 (parameter 12).
68054C	Make time for pulse dialing	1 ms	See Note 3. SP2-103-014 (parameter 13).
68054D	Time between final OHDI relay closure and DO relay opening or closing	1 ms	See Notes 3, 6 and 8. SP2-103-015 (parameter 14). This parameter is only valid in Europe.
68054E	Minimum pause between dialed digits (pulse dial mode)	20 ms	See Note 3 and 8. SP2-103-016 (parameter 15).
68054F	Time waited when a pause is entered at the operation panel		SP2-103-017 (parameter 16). See Note 3.
680550	DTMF tone on time	1 ms	SP2-103-018 (parameter 17).
680551	DTMF tone off time	1 ms	SP2-103-019 (parameter 18).
680552	Tone attenuation level of DTMF signals while dialing	-N x 0.5 –3.5 dBm	SP2-103-020 (parameter 19). See Note 5.

Address	Function	Unit	Remarks
680553	Tone attenuation value difference between high frequency tone and low frequency tone in DTMF signals	-dBm x 0.5	SP2-103-021 (parameter 20). The setting must be less than –5dBm, and should not exceed the setting at 680552h above. See Note 5.
680554	PSTN: DTMF tone attenuation level after dialling	-N x 0.5 -3.5 dBm	SP2-103-022 (parameter 21). See Note 5.
680555	ISDN: DTMF tone attenuation level after dialling	-dBm x 0.5	See Note 5
680556	Not used -		Do not change the settings.
680557	Time between 68054Dh (NCU parameter 14) and 68054Eh (NCU parameter 15)		This parameter takes effect when the country code is set to France.
680558	Not used	-	Do not change the setting.
680559	Grounding time (ground start mode)	20 ms	The Gs relay is closed for this interval.
68055A	Break time (flash start mode)	1 ms	The OHDI relay is open for this interval.
68055B	International dial access code (High)		For a code of 100:
68055C	International dial access code (Low)	BCD	68055B - F1 68055C - 00
68055D	PSTN access pause time	20 ms	This time is waited for each pause input after the PSTN access code. If this address contains FF[H], the pause time stored in address 68054F is used. Do not set a number more than 7 in the UK.

Address	Function	Unit	Remarks	
		Bit 7: 0, Bit 6: 0, Bit 5: 0 = -25.0 dBm		
		Bit 7: 0, Bit 6: 0, Bit 5: 1 = -35.0 dBm		
68055E	Progress tone detection level, and	Bit 7: 0, Bit 6: 1	, Bit 5: 0 = -30.0 dBm	
000335	cadence detection enable flags	Bit 7: 1, Bit 6: 0	Bit $5: 0 = -40.0 \text{ dBm}$	
		Bit 7: 1, Bit 6: 1	, Bit 5: 0 = -49.0 dBm	
		Bits 2, 0 - See Note 2		
68055F				
То	Not used	-	Do not change the settings.	
680564				
680565	Long distance call prefix (HIGH)	BCD	For a code of 0:	
		BCD	680565 – FF	
680566	0566 Long distance call prefix (LOW)		680566 - FF	
680567				
to	Not used	_	Do not change the settings.	
680571				
680572	Acceptable ringing signal frequency: range 1, upper limit		SP2-103-003 (parameter 02).	
680573	Acceptable ringing signal frequency: range 1, lower limit	1000/N	SP2-103-004 (parameter 03).	
680574	Acceptable ringing signal frequency: range 2, upper limit	(Hz).	SP2-103-005 (parameter 04).	
680575	Acceptable ringing signal frequency: range 2, lower limit		SP2-103-006 (parameter 05).	
680576	Number of rings until a call is detected	1	SP2-103-007 (parameter 06). The setting must not be zero.	
680577	Minimum required length of the first ring	20 ms	See Note 4.	
300077	Transfer required length of the hist fing	20 1110	SP2-103-008 (parameter 07).	

Address	Function	Unit	Remarks
680578	Minimum required length of the second and subsequent rings	20 ms	SP2-103-009 (parameter 08).
680579	Ringing signal detection reset time (LOW)	- 20 ms	SP2-103-010 (parameter 09).
68057A	Ringing signal detection reset time (HIGH)	ZO IIIS	SP2-103-011 (parameter 10).
68057B to 680580	Not used	-	Do not change the settings.
680581	Interval between dialing the last digit and switching the Oh relay over to the external telephone when dialing from the operation panel in handset mode.	20 ms	Factory setting: 500 ms
680582	Bits 0 and 1 - Handset off-hook detection Bit 1:0, Bit 0: 0 = 200 ms Bit 1:0, Bit 0: 1 = 800 ms Other Not used Bits 2 and 3 - Handset on-hook detection Bit 3: 0, Bit 2: 0 = 200 ms Bit 3: 0, Bit 2: 1 = 800 ms Other Not used Bits 4 to 7 - Not used		-
680583 To 6805A0	Not used -		Do not change the settings.
Acceptable CED detection frequency upper limit (high byte)		DCD (H-)	If both addresses contain FF
6805A2	Acceptable CED detection frequency upper limit (low byte)	BCD (Hz)	(H), tone detection is disabled.
6805A3	Acceptable CED detection frequency lower limit (high byte) BCD (Hz)		If both addresses contain FF (H), tone detection is disabled.

Address	Function	Unit	Remarks
6805A4	Acceptable CED detection frequency lower limit (low byte)		
6805A5	CED detection time	20 ms ± 20 ms	Factory setting: 200 ms
6805A6	Acceptable CNG detection frequency upper limit (high byte)	BCD (Hz)	If both addresses contain FF (H), tone detection is
6805A7	Acceptable CNG detection frequency upper limit (low byte)	BCD (HZ)	disabled.
6805A8	Acceptable CNG detection frequency lower limit (high byte)	PCD (H-)	If both addresses contain FF
6805A9	Acceptable CNG detection frequency lower limit (low byte)	BCD (Hz)	(H), tone detection is disabled.
6805AA	D5AA Not used		Do not change the setting.
6805AB	5AB CNG on time		Factory setting: 500 ms
6805AC	CNG off time	20 ms	Factory setting: 3000 ms
6805AD	Number of CNG cycles required for detection	-	The data is coded in the same way as address 680533.
6805AE	Not used	-	Do not change the settings.
6805AF	Acceptable AI short protocol tone (800Hz) detection frequency upper limit (high byte)		If both addresses contain FF (H), tone detection is
6805B0	Acceptable AI short protocol tone (800Hz) detection frequency upper limit (low byte)	Hz (BCD)	disabled.
6805B1	Acceptable AI short protocol tone (800Hz) detection frequency lower limit (high byte)		If both addresses contain FF (H), tone detection is
6805B2	Acceptable AI short protocol tone (800Hz) detection frequency lower limit (low byte)	Hz(BCD)	disabled.
6805B3	Detection time for 800 Hz AI short protocol tone		Factory setting: 360 ms

Address	Function			Unit	Remarks	
6805B4	PSTN: Tx level from the modem			-N – 3 dBm	SP2-103-002 (parameter 01).	
6805B5	PSTN: 1100 Hz tone transmission level			- N 6805B4 - See Note 7.	- N 6805B4 - 0.5N 6805B5 -3.5 (dB) See Note 7.	
6805B6	PSTN: 2100 Hz tone tro	ınsmission	level	- N6805B4 - (See Note 7.	0.5N 6805B6 -3 (dB)	
6805B7	PABX: Tx level from the r	modem		- dBm		
6805B8	PABX: 1100 Hz tone tro	ınsmission	level	- N 6805B7 -	0.5N 6805B8 (dB)	
6805B9	PABX: 2100 Hz tone tro	ınsmission	level	- N 6805B7 -	0.5N 6805B9 (dB)	
6805BD	Modem turn-on level (incoming signal detection level)			-37-0.5N (dBm)		
6805BE to 6805C6	Not used			-	Do not change the settings.	
6805C7	Bits 0 to 3 – Not used Bit 4 = V.34 protocol dump 0: Simple, 1 Bits 5 to 7 – Not used .			1: Detailed (defau	ult)	
6805C8 to 6805D9	Not used			-	Do not change the settings.	
6805DA	T.30 T1 timer			1 s		
6805E0 bit 3	Maximum wait time for post message			0: 12 s 1: 30 s	1: Maximum wait time for post message (EOP/EOM/MPS) can be changed to 30 s. Change this bit to "1" if communication errors occur frequently during V.17 reception.	
			0	RT=O (Low)		
6805E4	Bit 1 sets the level of the call signal, Bit 3 sets the	Bit 1	1	RT=1 (High)	- -	
	call signal impedance	Bit 3	0	RZ=0 (High)	1	

Address	Function			Unit	Remarks
			1	RZ=1 (Composite)	
		Bit 0 sets the ring Bit 0 1 Fixed 1 Fany	0	Auto	
	Bit 0 sets the ring detection method, Bit 1		ыо	ыго	DII O
6805E5	sets the ring detection	D: 1	0	Use RDTP	select a setting that is higher
	memod when fixed.	Bit 1	1	Use RDTN	than the default setting.
	Bits 2 to 7: Not used				

NOTES

- 1. If a setting is not required, store FF in the address.
- 2. Italy and Belgium only

RAM address 68055E: the lower four bits have the following meaning.

Bit 2 - 1: International dial tone cadence detection enabled (Belgium)

Bit 1 - Not used

Bit 0 - 1: PSTN dial tone cadence detection enabled (Italy)

If bit 0 or bit 2 is set to 1, the functions of the following RAM addresses are changed.

680508 (if bit 0 = 1) or 680538 (if bit 2 = 1): tolerance for on or off state

duration (%), and number of cycles required for detection, coded as in address 680533.

68050B (if bit 0 = 1) or 68053B (if bit 2 = 1): on time, hex code (unit = 20 ms)

68050C (if bit 0 = 1) or 68053C (if bit 2 = 1): off time, hex code (unit = 20 ms)

- 3. Pulse dial parameters (addresses 68054A to 68054F) are the values for 10 pps. If 20 pps is used, the machine automatically compensates.
- 4. The first ring may not be detected until 1 to 2.5 wavelengths after the time specified by this parameter.
- 5. The calculated level must be between 0 and 10.

The attenuation levels calculated from RAM data are:

High frequency tone:

- $-0.5 \times N_{680552}/_{680554}-3.5 \text{ dBm}$
- $-0.5 \times N_{680555} dBm$

Low frequency tone:

- $-0.5 \times (N_{680552}/_{680554} + N_{680553}) -3.5 \text{ dBm}$
- $-0.5 \times (N_{680555} + N_{680553}) dBm$



- N₆₈₀₅₅₂, for example, means the value stored in address 680552(H)
- 6. 68054A: Europe Between Ds opening and Di opening, France Between Ds closing and Di opening 68054D: Europe Between Ds closing and Di closing, France Between Ds opening and Di closing
- 7. Tone signals which frequency is lower than 1500Hz (e.g., 800Hz tone for AI short protocol) refer to the setting at 6805B5h. Tones which frequency is higher than 1500Hz refer to the setting at 6805B6h.
- 8. 68054A, 68054D, 68054E: The actual inter-digit pause (pulse dial mode) is the sum of the period specified by the RAM addresses 68054A, 68054D, and 68054E.

4

Dedicated Transmission Parameters

There are two sets of transmission parameters: Fax and E-mail

Each Quick Dial Key and Speed Dial Code has eight bytes of programmable parameters allocated to it. If transmissions to a particular machine often experience problems, store that terminal's fax number as a Quick Dial or Speed Dial, and adjust the parameters allocated to that number.

The programming procedure will be explained first. Then, the eight bytes will be described.

Programming Procedure

- 1. Set the bit 0 of System Bit Switch 00 to 1.
- Enter Address Book Management mode ([User Tools]> System Settings> Administrator Tools > Address Book Management).
- 3. Select the address book that you want to program.
- 4. Press the "Dest." Key to enter the fax and e-mail parameter settings.
- 5. For the fax parameter, select "Fax Settings", for the E-mail parameter, select "E-mail Settings".
- 6. Press the "OK" key, and then press "Start" key. Make sure that the LED of the Start button lights green.
- 7. The settings for the switch 00 are now displayed. Press the bit number that you wish to change.
- 8. To scroll through the parameter switches, either:
- 9. Select the next switch: press "Next" or Select the previous switch: "Prev." until the correct switch is displayed. Then go back to step 6.
- 10. After the setting is changed, press "OK" key.
- 11. After finishing, reset bit 0 of System Bit Switch 00 to 0.

Parameters

Fax Parameters

The initial settings of the following fax parameters are all FF(H) - all the parameters are disabled.

Switch 00

FUNCTION AND COMMENTS

ITU-T T1 time (for PSTN G3 mode)

If the connection time to a particular terminal is longer than the NCU parameter setting, adjust this byte. The T1 time is the value stored in this byte (in hex code), multiplied by 1 second.

Range:

0 to 120 s (00h to 78h)

FFh - The local NCU parameter factory setting is used.

Do not program a value between 79h and FEh.

Switch	01						
No	FUNCTION					COMMENTS	
	Tx lev	Tx level					
	Bit4	Bit3	Bit2	Bit1	BitO		
	0	0	0	0	0	0	If communication with a particular remote terminal often contains errors, the signal
	0	0	0	0	1	-1	level may be inappropriate. Adjust the Tx level for communications with that terminal
0.4	0	0	0	1	0	-2	until the results are better.
0-4	0	0	0	1	1	-3	If the setting is "Disabled", the NCU parameter 01 setting is used.
	0	0	1	0	0	-4	Note
	1	1	1	1	1	1	Do not use settings other than listed on
	0	1	1	1	1	-15	the left.
	1	1	1	1	1	Disabled	
	Cable	Cable equalizer					Use a higher setting if there is signal loss at higher frequencies because of the length of wire between the modem and the telephone exchange when calling the number stored in this Quick/Speed Dial.
5-7		•	0, Bit 5				Also, try using the cable equalizer if one or more of the following symptoms occurs.
J-/			1, Bit 5				Communication error with error codes such as 0-20, 0-23, etc.
	Bit 7:	1, Bit 6:	1, Bit 5	5: 1 = D	isabled		Modem rate fallback occurs frequently.
		Bit 7: 1, Bit 6: 1, Bit 5: 1 = Disabled					 Note Do not use settings other than listed on the left.

4

If the setting is "Disabled", the bit switch setting is used.

Switch 02						
No	FUNCTION					COMMENTS
	Initial	Initial Tx modem rate				
	Bit3	Bit2	Bit1	BitO	bps	
	0	0	0	0	Not used	
	0	0	0	1	2400	
	0	0	1	0	4800	
	0	0	1	1	7200	
	0	1	0	0	9600	If training with a particular remote terminal always
	0	1	0	1	12000	takes too long, the initial modem rate may be too high. Reduce the initial Tx modem rate using these
	0	1	1	0	14400	bits.
0-3	0	1	1	1	16800	For the settings 14.4 or kbps slower, Switch 04 bit 4 must be changed to 0.
	1	0	0	0	19200	₩Note
	1	0	0	1	21600	Do not use settings other than listed on the left. If the setting is "Disabled", the bit switch setting.
	1	0	1	0	24000	is used.
	1	0	1	1	26400	
	1	1	0	0	28800	
	1	1	0	1	31200	
	1	1	1	0	33600	
	1	1	1	1	Disabled	
	Other	settings	: Not u	sed		
4-7	Not u	sed				Do not change the settings.

Switch 03

No	FUNCTION	COMMENTS
0-1	Inch-mm conversion before tx Bit 1: 0, Bit 0: 0 = Inch-mm conversion available Bit 1: 0, Bit 0: 1 = Inch only Bit 1: 1, Bit 0: 0 = Not used Bit 1: 1, Bit 0: 1 = Disabled	The machine uses inch-based resolutions for scanning. If "inch only" is selected, the printed copy may be slightly distorted at the other end if that machine uses mm-based resolutions. If the setting is "Disabled", the bit switch setting is used.
2-3	DIS/NSF detection method Bit 3: 0, Bit 2: 0 = First DIS or NSF Bit 3: 0, Bit 2: 1 = Second DIS or NSF Bit 3: 1, Bit 2: 0 = Not used Bit 3: 1, Bit 2: 1 = Disabled	(0, 1): Use this setting if echoes on the line are interfering with the set-up protocol at the start of transmission. The machine will then wait for the second DIS or NSF before sending DCS or NSS. If the setting is "Disabled", the bit switch setting is used.
4	V.8 protocol 0: Off 1: Disabled	If transmissions to a specific destination always end at a lower modem rate (14,400 bps or lower), disable V.8 protocol so as not to use V.34 protocol. O: V.34 communication will not be possible. If the setting is "Disabled", the bit switch setting is used.
5	Compression modes available in transmit mode 0: MH only 1: Disabled	This bit determines the capabilities that are informed to the other terminal during transmission. If the setting is "Disabled", the bit switch setting is used.
6-7	ECM during transmission Bit 7: 0, Bit 6: 0 = Off Bit 7: 0, Bit 6: 1 = On Bit 7: 1, Bit 6: 0 = Not used Bit 7: 1, Bit 6: 1 = Disabled	For example, if ECM is switched on but is not wanted when sending to a particular terminal, use the (0, 0) setting. • V.8/V.34 protocol and JBIG compression are automatically disabled if ECM is disabled. • If the setting is "Disabled", the bit switch setting is used.

Switch 04 - Not used (do not change the settings)

Switch 05 - Not used (do not change the settings)

Switch 06 - Not used (do not change the settings)

Switch 07 - Not used (do not change the settings)

Switch 08 - Not used (do not change the settings)

Switch 09 - Not used (do not change the settings)

E-mail Parameters

The initial settings of the following e-mail parameters are all "0" (all parameters disabled).

Switch 00		
No	FUNCTION	COMMENTS
0	MH Compression mode for e-mail attachments 0: Off 1: On	Switches MH compression on and off for files attached to e-mails for sending.
1	MR Compression mode for e-mail attachments 0: Off 1: On	Switches MR compression on and off for files attached to e-mails for sending.
2	MMR Compression mode for e-mail attachments 0: Off 1: On	Switches MMR compression on and off for files attached to e-mails for sending.
3-6	Not used	Do not change these settings.
7	Designates the bits to reference for compression method of e-mail attachments O: Registered (Bit 0 to 6) 1: No registration.	The "0" selection (default) references the settings for Bits 00, 01, 02 above. The "1" selection ignores the selections of Bits 00, 01, 02.

Switch 0	1	
No	FUNCTION	COMMENTS

0	Original width of e-mail attachment: A4 0: Off 1: On	Sets the original width of the e-mail attachment as A4.
1	Original width of e-mail attachment: B4 0: Off 1: On	Sets the original width of the e-mail attachment as B4.
2	Original width of e-mail attachment: A3 0: Off 1: On	Sets the original width of the e-mail attachment as A3.
3-6	Not used	Do not change these settings.
7	Designates the bits to reference for original size of e-mail attachments O: Registered (Bit 0 to 6) 1: No registration.	The "O" selection (default) references the settings for Bits 00, 01, 02 above. The "1" selection ignores the selections of Bits 00, 01, 02.

Switch ()2	
No	FUNCTION	COMMENTS
0	Line resolution of e-mail attachment: 200 x 100 0: Off 1: On	Sets the line resolution of the e-mail attachment as 200 x 100.
1	Line resolution of e-mail attachment: 200 x 200 0: Off 1: On	Sets the line resolution of the e-mail attachment as 200 x 200.
2	Line resolution of e-mail attachment: 200 x 400 0: Off	Sets the line resolution of the e-mail attachment as 200 x 400.

	1: On	
3	Not used	Do not change these settings.
4	Line resolution of e-mail attachment: 400 x 400 0: Off 1: On	Sets the line resolution of the e-mail attachment as 400 x 400.
5-6	Not used	Do not change these settings.
7	Designates the bits to reference for original size of e-mail attachments O: Registered (Bit 0 to 6) 1: No registration.	The "O" selection (default) references the settings for Bits 00, 01, 02, 04 above. The "1" selection ignores the selections of Bits 00, 01, 02, 04.

Switch 03 - Not used (do not change the settings)

Switch 04		
No	FUNCTION	COMMENTS
	Full mode address selection	If the other ends have the addresses, which have the full mode function flag ("O"), this machine determines them as full mode standard machines.
0	0: Full mode address 1: No full mode (simple mode)	 This machine attaches the "demand of reception confirmation" to a message when transmitting. This machine updates the reception capability to the address book when receiving.
1-7	Not used	Do not change these settings.

Switch 05		
No	FUNCTION	COMMENTS
0	Directr transmission selection to SMTP server 0: ON 1: OFF	Allows or does not allow the direct transmission to SMTP server.

1-7	Not used	Do not change these settings.
Switch 0	6 - Not used (do not change the	e settings)
Switch 0	7 - Not used (do not change the	e settings)

Switch 08 - Not used (do not change the settings)

Switch 09 - Not used (do not change the settings)

Service RAM Addresses

CAUTION

• Do not change the settings which are marked as "Not used" or "Read only."

680000(H) - Machine code

680001 to 680004(H) - ROM version (Read only)

680001(H) - Revision number (BCD)

680002(H) - Year (BCD)

680003(H) - Month (BCD)

680004(H) - Day (BCD)

680005(H) - Machine code 2 (check ram2)

680006 to 680015(H) - Machine's serial number (16 digits - ASCII)

680016(H) - Language code

BitO: Japanese, Bit1: English (UK), Bit2: English (USA), Bit3: French,

Bit4: German, Bit5: Spanish, Bit6: Italian, Bit7: Dutch, Bit8: Swedish,

Bit9: Norwegian, Bit10: Danish, Bit11: Finnish, Bit12: Czech,

Bit13: Hungarian, Bit14: Polish, Bit15: Portuguese, Bit16: Russian,

Bit17: Traditional Chinese, Bit18: Simplified Chinese, Bit19: Hangul

680018(H) - Total program checksum (low)

680019(H) - Total program checksum (high)

680020 to 68003F(H) - System bit switches

680050 to 68005F(H) - Printer bit switches

680060 to 68007F(H) - Communication bit switches

680080 to 68008F(H) - G3 bit switches

680090 to 68009F(H) - G3-2 bit switches: Not used

6800A0 to 6800AF(H) - G3-3 bit switches: Not used

6800D0(H) - User parameter switch 00 (SWUER_00): Not used

6800D1(H) - User parameter switch 01 (SWUSR_01): Not used

6800D2(H) - User parameter switch 02 (SWUSR_02)

Bit 0: Forwarding mark printing on forwarded messages

0: OFF, 1: ON (Print)

Bit 1: Center mark printing on received copies

(This switch is not printed on the user parameter list.)

0: OFF, 1: ON (Print) Bit 2: Reception time printing

(This switch is not printed on the user parameter list.)

0: OFF, 1: ON (Print)

Bit 3: TSI print on received messages 0: OFF, 1: ON (Print)

Bit 4: Checkered mark printing

(This switch is not printed on the user parameter list.)

0: OFF, 1: ON (Print)

Bit 5: Not used

Bit 6: Not used

Bit 7: Not used

6800D3(H) - User parameter switch 03 (SWUSR_03: Automatic report printout)

Bit 0: Transmission result report (memory transmissions) 0: Off, 1: On

Bit 1: Not used

Bit 2: Memory storage report 0: Off, 1: On

Bit 3: Polling reserve report (polling reception) 0: Off, 1: On

Bit 4: Polling result report (polling reception) 0: Off, 1: On

Bit 5: Transmission result report (immediate transmissions) 0: Off, 1: On

Bit 6: Not used

Bit 7: Journal 0: Off, 1: On

6800D4(H) - User parameter switch 04 (SWUSR_04: Automatic report printout)

Bit 0: Not used

Bit 1: Automatic communication failure report and transfer result report output 0: Off, 1: On

Bits 2 to 3: Not used

Bit 4: Indicates the parties 0: Not indicated, 1: Indicated

Bit 5: Include sender's name on reports 0: Off, 1: On

Bit 6: Not used

Bit 7: Inclusion of a sample image on reports 0: Off, 1: On

6800D5(H) - User parameter switch 05 (SWUSR_05)

Bit 0: Substitute reception when the base copier is in an SC condition

0: Enabled, 1: Disabled

Bits 1 and 2: Condition for substitute rx when the machine cannot print messages (Paper end, toner end, jam, and during night mode)

Bit 2: 0, Bit 1: 0 = The machine receives all the fax messages.

Bit 2: 0, Bit 1: 1 = The machine receives the fax messages with RTI or CSI.

Bit 2: 1, Bit 1: 0 = The machine receives the fax messages with the same ID code.

Bit 2: 1, Bit 1: 1 = The machine does not receive anything.

Bits 3 and 4: Not used

Bit 5: Just size printing 0: Off, 1: On

Bit 6: Not used

Bit 7: Add paper display when a cassette is empty 0: Off, 1: On

6800D6(H) - User parameter switch 06 (SWUSR_06): Not used

6800D7(H) - User parameter switch 07 (SWUSR_07)

Bits 0 and 1: Not used

Bit 2: Parallel memory transmission 0: Off, 1: On

Bits 3 to 7: Not used

6800D8(H) - User parameter switch 08 (SWUSR_08)

Bits 0 and 1: Not used.

Bit 2: Authorized reception

0: Only faxes from senders whose RTIs/CSIs are specified for this feature are accepted.

1: Only faxes from senders whose RTIs/CSIs are not specified for this feature are accepted.

Bits 3 to 7: Not used.

6800D9(H) - User parameter switch 09 (SWUSR_09): Not used

6800DA(H) - User parameter switch 10 (SWUSR_OA)

Bits 0 to 2: Not used

Bit 3: Page reduction 0: Off, 1: On

Bits 4 and 5: Not used

Bit 6: Use both e-mail notification and printed reports to confirm the transmission results 0: Off, 1: On

Bit 7: Not used

6800DB(H) - User parameter switch 11 (SWUSR_OB)

Bits 0 and 1: Not used

Bit 2: White original detection 0: Off, 1: On (alarm and alert message on the LCD)

Bits 3 and 4: Not used

Bit 6: Printout of messages received while acting as a forwarding station 0: Off, 1: On

Bit 7: Not used

6800DC(H) - User parameter switch 12 (SWUSR_0C): Not used

6800DD(H) - User parameter switch 13 (SWUSR_0D): Not used

6800DE(H) - User parameter switch 14 (SWUSR_OE)

Bit 0: Message printout while the machine is in Night Printing mode 0: On, 1: Off

Bit 1: Maximum document length detection 0: Double letter, 1: Longer than double-letter (well log) – up to 1,200 mm

Bit 2: Not used

Bit 3: Fax mode settings, such as resolution, before a mode key (Copy/Fax/Printer/Scanner) is pressed 0: Not cleared. 1: Cleared

Bits 4 to 7: Not used

6800DF(H) - User parameter switch 15 (SWUSR_OF)

(This switch is not printed on the user parameter list.)

Bits 0, 1 and 2: Cassette for fax printout

Bit 2: 0, Bit 1: 0, Bit 0: 1 = 1st paper feed station

Bit 2: 0, Bit 1: 1, Bit 0: 0 = 2nd paper feed station

Bit 2: 0, Bit 1: 1, Bit 0: 1 = 3rd paper feed station

Bit 2: 1, Bit 1: 0, Bit 0: 0 = 4th paper feed station

Bit 2: 1, Bit 1: 0, Bit 0: 1 = LCT

Other settings Not used

Bits 3 and 4: Not used

Bit 5: Using the cassette specified by bits 0, 1 and 2 above only 0: On, 1: Off

Bits 6 and 7: Not used

6800E0(H) – User parameter switch 16 (SWUSR_10)

(This switch is not printed on the user parameter list.)

Bits 0 and 1: Not used

Bit 2: Paper size selection priority for an A4 size fax message when A4/LT size paper is not available. 0: A3 has priority, 1: B4 has priority

Bits 3 to 7: Not used

6800E1(H) – User parameter switch 17 (SWUSR_11)

Bits 0 and 1: Not used

Bit 2: Inclusion of the "Add" button when a sequence of Quick/Speed dials is selected for broadcasting 0: Not needed. 1: Needed

Bits 3 to 6: Not used

Bit 7: Press "Start" key without an original when using the on hook dial or the external telephone,

0: displays "Cannot detect original size". 1: Receives fax messages.

6800E2(H) - User parameter switch 18 (SWUSR_12)

Bit 0: TTI date 0: Off, 1: On

Bit 1: TTI sender 0: Off, 1: On

Bit 2: TTI file number 0: Off, 1: On

Bit 3: TTI page number 0: Off, 1: On

Bits 4 to 7: Not used

6800E3(H) - User parameter switch 19 (SWUSR_13)

Bit 0: Not used

Bit 1: Journal format

0: The Journal is separated into transmissions and receptions

1: The Journal is separated into G3-1, G3-2, and G3-3 communications

Bit 2: Not used

Bit 3: 90° image rotation during B5 portrait Tx (This switch is not printed on the user parameter list.) 0: Off, 1: On

Bit 4: Reduction of sample images on reports to 50% in the main scan and sub-scan directions. (This switch is not printed on the user parameter list.) 0: Technician adjustment (printer switch 0E bits 3 and 4), 1: 50% reduction

Bit 5: Use of A5 size paper for reports (This switch is not printed on the user parameter list.) 0: Off, 1: On

Bits 6 and 7: Not used

6800E4(H) - User parameter switch 20 (SWUSR_14)

Bit 0: Automatic printing of the LAN fax result report 0: Off, 1: On

Bit 1: Not used.

Bits 2 to 5: Store documents in memory which could not be printed from PC fax (LAN fax) driver

Bit 5	Bit 4	Bit 3	Bit 2	Setting
0	0	0	0	0 min.
0	0	0	1	1 min.
↓ ↓	↓	+	•	↓
1	1	1	0	↓ 14 min.

Bits 6 and 7: Not used.

6800E5(H) - User parameter switch 21 (SWUSR_15)

4

Bit 0: Print results of sending reception notice request message 0: Disabled (print only when error occurs),

1: Enabled

Bit 1: Respond to e-mail reception acknowledgment request 0: Disabled, 1: Enabled

Bit 2: Not used

Bit 3: File format for forwarded folders 0: TIFF, 1:PDF

Bit 4: Transmit Journal by E-mail 0: Disabled, 1: Enabled

Bit 5: Not used

Bit 6: Network error display 0: Displayed, 1: Not displayed

Bit 7: Transmit error mail notification 0: Enabled, 1: Disabled

6800E6(H) - User parameter switch 22 (SWUSR_16)

(This switch is not printed on the user parameter list.)

Bit 0: Dial tone detection (PSTN 1) 0: Disabled, 1: Enabled

Bits 1 to 7: Not used

6800E7(H) - User parameter switch 23 (SWUSR_17): Not used

6800E8(H) - User parameter switch 24 (SWUSR_18): Not used

6800E9(H) - User parameter switch 25 (SWUSR_19)

Bits 0 to 3: Not used

Bit 4: RDS operation 0: Not acceptable, 1: Acceptable for the limit specified by system switch 03



 This bit is only effective when RDS operation can be selected by the user (see system switch 02).

Bits 5 to 7: Not used

6800EA(H) and 6800EB(H) - User parameter switches 26 and 27 (SWUSR_1A and 1B): Not used 6800EC(H) - User parameter switch 28 (SWUSR_1C)

- Ringing times setting in the TEL line priority mode: 00 to 99 (BCD)

6800ED(H) - User parameter switch 29 (SWUSR_1D): Not used

6800EE(H) and 6800EF(H) - User parameter switches 30 and 31 (SWUSR_1E and 1F): Not used 6800F0(H) - User parameter switch 32 (SWUSR_20)

Bit 0: Quotation priority for a destination when there is no destination of the specified type

O: Paper output priority = Priority order: 1. IP-fax destination, 2. Fax Number, 3. E-mail address, 4. Folder

1: Electric putout order = Priority order: 1. E-mail address, 2. Folder, 3. IP-fax destination, 4. Fax number

Bits 1 to 7: Not used

6800F1(H) - User parameter switch 33 (SWUSR_21): Not used

6800F2(H) - User parameter switch 34 (SWUSR_22)

```
Bit 1: SIP server used with IP-Fax 0: Disabled, 1: Enabled
Bits 2 to 7: Not used
680100 to 68010F(H) - G4 Parameter Switches - Not used
680110 to 68012F(H) - G4 Internal Switches - Not used
680130 to 68016F(H) - Service Switches (SCU) - Not used
680170 to 68017F(H) - IFAX Switches
680180 to 68018F(H) - IP-FAX Switches
680190 to 6801AF(H) - Service station's fax number (SP3-101)
6801B0 to 6801B9(H) - Own fax PABX extension number
6801BA to 6801C3(H) - Own fax number (PSTN) - Not used
6801C4 to 6801D7(H) - Own fax number (ISDN G4) - Not used
6801D8 to 6801E3(H) - The first subscriber number (ISDN G3) - Not used
6801E4 to 6801EF(H) - The second subscriber number (ISDN G3) - Not used
6801F0 to 6801FB(H) - The first subscriber number (ISDN G4) - Not used
6801FC to 680207(H) - The second subscriber number (ISDN G4) - Not used
680208 to 68021B(H) - PSTN-1 RTI (Max. 20 characters - ASCII) - See the following note.
68021C to 68022F(H) - PSTN-2 RTI (Max. 20 characters - ASCII) - Not used
680230 to 680246(H) - PSTN-3 RTI (Max. 20 characters - ASCII) - Not used
680247 to 680286(H) - TTI 1 (Max. 64 characters - ASCII) - See the following note.
680287 to 6802C6(H) - TTI 2 (Max. 64 characters - ASCII) - Not used
6802C7 to 680306(H) - TTI 3 (Max. 64 characters - ASCII) - Not used
680307 to 68031A(H) - PSTN-1 CSI (Max. 20 characters - ASCII)
68031B to 68032E(H) - PSTN-2 CSI (Max.20 characters - ASCII) - Not used
68032F to 680342(H) - PSTN-3 CSI (Max.20 characters - ASCII) - Not used
680343(H) - Number of PSTN-1 CSI characters (Hex)
680344(H) - Number of PSTN-2 CSI characters (Hex) - Not used
680345(H) Number of PSTN-3 CSI characters (Hex) - Not used
₩ Note
```

Bit O: Gatekeeper server used with IP-Fax O: Disabled, 1: Enabled

• If the number of characters is less than the maximum (20 for RTI, 64 for TTI), add a stop code (00[H]) after the last character.

680370(H) ID for transmission and reception (Read only – Do not change the settings)

680374 to 680375(H) - Memory Lock ID for the memory reception (BCD)


```
4
```

```
680380 to 680387(H) - Last power off time (Read only)
680380(H) - 01(H) - 24-hour clock, 00(H) - 12-hour clock (AM), 02(H) - 12-hour clock (PM)
680381(H) - Year (BCD)
680382(H) - Month (BCD)
680383(H) - Day (BCD)
680384(H) - Hour
680385(H) - Minute
680386(H) - Second
680387(H) - 00: Monday, 01: Tuesday, 02: Wednesday, ///, 06: Sunday
680394(H) - Optional equipment - Not used
680395(H) - Optional equipment (Read only – Do not change the settings)
Bits 0 to 3: Not used
Bit 4: G3-2 0: Not installed, 1: Installed
Bit 5: G3-3 0: Not installed, 1: Installed
Bit 6 and 7: Not used
680401 to 68040D - Not used
680410(H) - G3-1 Modem ROM version (Read only)
680412(H) - G3-2 Modem ROM version - Not used
680414(H) - G3-3 Modem ROM version - Not used
680420(H) - Number of multiple sets print (Read only)
680476(H) - Time for economy transmission - Not used
68048C(H) - Dial in (BCD)
680492(H) - Transmission monitor volume 00 - 07(H)
680493(H) - Reception monitor volume 00 - 07(H)
680494(H) - On-hook monitor volume 00 - 07(H)
680495(H) - Dialing monitor volume 00 - 07(H)
680496(H) - Buzzer volume 00 - 07(H)
680497(H) - Beeper volume 00 - 07(H)
6804A8(H) - Machine code (Check ram 4)
6804D2(H) - Serial number (Max. 8 characters ASCII)
685E6C to 685E6F(H) - Transmission counter (HEX)
685E70 to 685E73(H) - Reception counter (HEX)
685EDC to 685EDF(H) - E-mail transmission counter (HEX)
```

```
685EE0 to 685EE3(H) - E-mail reception counter (HEX)
688E8E to 68918D(H) - SIP server address (Read only)
688E8E(H) - Proxy server - Main (Max. 128 characters - ASCII)
688F0E(H) - Proxy server - Sub (Max. 128 characters - ASCII)
688F8E(H) - Redirect server - Main (Max. 128 characters - ASCII)
68900E(H) - Redirect server - Sub (Max. 128 characters - ASCII)
68908E(H) - Registrar server - Main (Max. 128 characters - ASCII)
68910E(H) - Registrar server - Sub (Max. 128 characters - ASCII)
68918E(H) - Gatekeeper server address - Main (Max. 128 characters - ASCII)
68920E(H) - Gatekeeper server address - Sub (Max. 128 characters - ASCII)
68928E(H) - Arias Number (Max. 128 characters - ASCII)
68930E(H) - SIP user name (Max. 128 characters - ASCII)
68938E(H) - SIP authentication password (Max. 128 characters - ASCII)
68938E(H) - SIP digest authentication password (Max. 128 characters - ASCII)
68940E(H) - Gateway address information (Max. 7100 characters - ASCII)
68AFCA(H) - Stand-by port number for H.232 connection
68AFCCH) - Stand-by port number for SIP connection
68AFCE(H) - RAS port number
68AFDO(H) - Gatekeeper port number
68AFD2(H) - Port number of data waiting for T.38
68AFD4(H) - Port number of SIP server
68AFD6(H) - Priority for SIP and H.323 0: H.323, 1: SIP
68AFD7(H) - SIP function 0: Disabled, 1: Enabled
68AFD8(H) - H.323 function 0: Disabled, 1: Enabled
68AFD9(H) - SIP digest authentication function 0: Disabled, 1: Enabled
68AFDA(H) - IP-Fax backup data 00 - 600 (H)
69ECBE(H) - 69ECDE(H) - Dial tone detection parameter (Max. 11 x 3 lines)
This initializes following order. [0x04, 0x40, 0x03, 0x60, 0x64, 0xf4, 0x01,0x64, 0x04, 0xc8, 0x00]
```

5. Detailed Section Descriptions

Overview

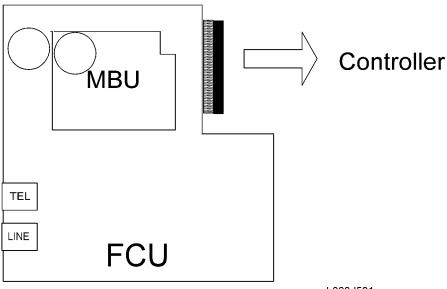


b868d501

The basic fax unit consists of two PCBs: an FCU and an MBU.

The FCU controls all the fax communications and fax features, in cooperation with the controller board. The MBU contains the ROM and SRAM. Also, the FCU has an NCU circuit.

Boards

FCU

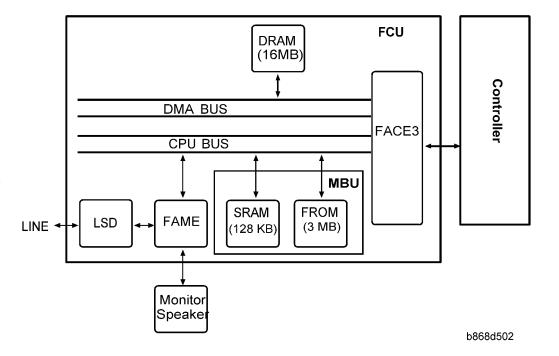

The FCU (Facsimile Control Unit) controls fax communications, the video interface to the base copier's engine, and all the fax options.

FACE3 (Fax Application Control Engine)

- CPU
- Data compression and reconstruction (DCR)
- DMA control
- Clock generation
- DRAM backup control

Modem (FAME)

• V.34, V33, V17, V.29, V.27ter, V.21, and V.8

Ę

5

DRAM

• The 16 MB of DRAM is shared as follows.

SAF memory: 4MB

Working memory: 8MB

Page memory: 4MB

• The SAF memory is backed up by a rechargeable battery.

Memory Back-up

• A Rechargeable battery backs up the SAF memory (DRAM) for 12 hour.

MBU

On this board, the flash ROM contains the FCU firmware, and the SRAM contains the system data and user parameters. Even if the FCU is changed, the system data and user parameters are kept on the MBU board.

ROM

3MB flash ROMs for system software storage
 2MB (16bit x 1MB) + 1MB (16bit x 512K)

SRAM

• The 128 KB SRAM for system and user parameter storage is backed up by a lithium battery.

Memory Back-up

• A lithium battery backs up the system parameters and programmed items in the SRAM, in case the base copier's main switch is turned off.

Switches

Item	Description	
SW1	Switches the SRAM backup battery on/off.	

Fax Communication Features

Internet Mail Communication

Mail Transmission

This machine supports T.37 full mode. (ITU-, RFC232). The difference between T.37 simple mode and full mode is as follows.

Function	T.37 Simple Mode	T.37 Full Mode
		200 x100
Resolution	200 x 100	200 x 200
Resolution	200 x 200	200 x 400
		400 x 400 (if available)
RX Paper Width	A4	A4, B4, A3
RX Data Compression Method	МН	MH (default), MR, MMR,
Signals	Image data transmission only	Image data transmission, exchange of capability information between the two terminals, and acknowledgement of receipt of fax messages

Data Formats

The scanned data is converted into a TIFF-F formatted file.

The fields of the e-mail and their contents are as follows:

Field	Content
From	Mail address of the sender
Reply To	Destination requested for reply
То	Mail address of the destination
Всс	Backup mail address
Subject	From CSI or RTI (Fax Message No. xxxx)

Content Type	Multipart/mixed Attached files: image/tiff
Content Transfer Encoding	Base 64, 7-bit, 8-bit, Quoted Printable
Message Body	MIME-converted TIFF-F (MIME standards specify how files are attached to e-mail messages)

Direct SMTP Transmission

Internet Fax documents can be sent directly to their destinations without going through the SMTP server. (Internet Faxes normally transmit via the SMTP server.)

For example:

e-mail address:	gts@ricoh.co.jp
SMTP server address:	gts.abcd.com

In this case this feature destination e-mail address (gts@ricoh.co.jp) is read as the SMTP server address "gts.abcd.com" and the transmissions bypass the SMTP server.

Selectable Options

These options are available for selection:

- With the default settings, the scan resolution can be either standard or detail. Inch-mm conversion before TX depends on IFAX SW01 Bit 7. Detail resolution will be used if Super Fine resolution is selected, unless Fine resolution is enabled with IFAX SW01.
- The requirements for originals (document size, scan width, and memory capacity) are the same as for G3 fax memory TX.
- The default compression is TIFF-F format.
- IFAX SW00: Acceptable paper widths for sending
- IFAX SW09: Maximum number of attempts to the same destination

Secure Internet Transmission

- SMTP Authentication: User Tools> System Settings> File Transfer> SMTP Authentication
- POP Before SMTP: User Tools> System Settings> File Transfer> POP Before SMTP

Mail Reception

This machine supports three types of e-mail reception:

- POP3 (Post Office Protocol Ver. 3.)
- IMAP4 (Internet Messaging Access Protocol)
- SMTP (Simple Mail Transfer Protocol)

For details: Core Technology Manual – Facsimile Processes – Faxing from a PC – Internet/LAN Fax Boards – Mail Reception

POP3/IMAP4 Mail Reception Procedure

The machine automatically picks up e-mail from the server at an interval which is adjustable in the range 2 to 1440 min. in 1-minute steps: User Tools> System Settings> File Transfer> E-mail Reception Interval

SMTP Reception

- The IFAX must be registered as an SMTP server in the MX record of the DNS server, and the address
 of the received mail must specify the IFAX.
- Enable SMTP reception: User Tools> System Settings> File Transfer> Reception Protocol
 Even if the MX record on the DNS server includes the IFAX, mail cannot be received with SMTP until SMTP reception is enabled:

However, if SMTP reception is selected and the machine is not registered in the MX record of the DNS server, then either IMAP4 or POP3 is used, depending on the setting: User Tools> System Settings> File Transfer> Reception Protocol

Mail Delivery Conditions: Transferring Mail Received With SMTP

- The machine must be set up for SMTP mail delivery: User Tools> Facsimile Features> E-mail Settings> SMTP RX File Delivery Settings
- If the user wishes to limit this feature so that the machine will only deliver mail from designated senders, the machine's "Auth. E-mail RX" feature must be set (User Tools> Facsimile Features> E-mail Settings> SMTP RX File Delivery Settings).
- 3. If the "SMTP RX File Delivery Setting" is set to 0 to prohibit SMTP receiving, and if there is mail designated for delivery, then the machine responds with an error. (User Tools> Facsimile Features> E-mail Settings> SMTP RX File Delivery Settings)
- 4. If the quick dial, speed dial, or group dial entry is incorrect, the mail transmission is lost, and the IFAX issues an error to the SMTP server and outputs an error report.

Auth. E-mail RX

In order to limit access to mail delivery with IFAX, the addresses of senders must be limited using the Access Limit Entry. Only one entry can be registered.

1. Access Limit Entry

For example, to limit access to @IFAX.ricoh.co.jp:

gts@IFAX.ricoh.co.jp	Matches and is delivered.	
gts@IFAX.abcde.co.jp	Does not match and is not delivered.	
IFAX@ricoh.co.jp	Does not match and is not delivered.	

2. Conditions

- The length of the Access Limit Entry is limited to 127 characters.
- If the Access Limit Entry address and the mail address of the incoming mail do not match, the
 incoming mail is discarded and not delivered, and the SMTP server responds with an error.
 However, in this case an error report is not output.
- If the Access Limit Entry address is not registered, and if the incoming mail specifies a delivery destination, then the mail is delivered unconditionally.

Handling Mail Reception Errors

Abnormal files

When an error of this type occurs, the machine stops receiving and commands the server to erase the message. Then the machine prints an error report and sends information about the error by e-mail to the sender address (specified in the "From" or "Reply-to" field of the message). If there is an incomplete received message in the machine memory, it will be erased.

The machine prints an error message when it fails to send the receive error notification after a certain number of attempts.

The following types of files are judged to be abnormal if one or more of the following are detected:

1. Unsupported MIME headers.

Supported types of MIME header

Header	Supported Types
Content-Type	Multipart/mixed, text/plain, message/rfc822 lmage/tiff
Charset	US-ASCII, ISO 8859 X. Other types cannot be handled, and some garbage may appear in the data.
Content-Transfer-Encoding	Base 64, 7-bit, 8-bit, Quoted Printable

- 2. MIME decoding errors
- 3. File format not recognized as TIFF-F format
- 4. Resolution, document size, or compression type cannot be accepted

Remaining SAF capacity error

The machine calls the server but does not receive e-mail if the remaining SAF capacity is less than a certain value (the value depends on IFAX Switch 08. The e-mail will be received when the SAF capacity increases (for example, after substitute reception files have been printed). The error handling method for this type of error is the same as for "Abnormal files".

If the capacity of the SAF memory drops to zero during reception, the machine operates in the same way as when receiving an abnormal file (refer to "Abnormal files" above).

Secure Internet Reception

To enable password encryption and higher level security: User Tools> System Settings> File Transfer> POP3/IMAP4 Settings> Encryption (set to "On")

Transfer Request: Request By Mail

For details: Core Technology Manual – Facsimile Processes – Faxing from a PC – Internet/LAN Fax Boards – Transfer Request

The fields of the e-mail and their contents are as follows:

Field	Content
From	E-mail address of the requesting terminal
То	Destination address (Transfer Station address)
Всс	Blind carbon copy
Subject	From TSI (Fax Message No. xxxx)
Content-Type	Multipart/mixed Text/Plain (for a text part), image/tiff (for attached files)
Content-Transfer-Encoding	Base 64, 7-Bit, 8-bit, Quoted Printable
Mail body (text part)	RELAY-ID-: xxxx (xxxx: 4 digits for an ID code) RELAY: #01#*X#**01
Message body	MIME-converted TIFF-F.

E-Mail Options (Sub TX Mode)

The following features are available as options for mail sending: entering a subject, designating the level of importance, confirming reception of the mail.

Subject and Level of Importance

You can enter a subject message with: Sub TX Mode> E-mail Options

The Subject entry for the mail being sent is limited to 64 characters. The subject can also be prefixed with an "Urgent" or "High" notation.


How the Subject Differs According to Mail Type

Mail Type	1	2		3	
Subject Entry		Entry Condition			
	-	1. "CSI" ("RTI")		Fax Message No.	
No Subject		2. "RTI"	CSI not registered	+ File No.	
Entry		3. "CSI"	RTI not registered		
		4. None	CSI, RTI not registered		
	From	1. "CSI" ("RTI")		Normal:	
		2. "RTI"	CSI not registered	Return Receipt (dispatched).	
Confirmation of Reception				You can select "displayed" with IFAX SW02 Bits 2 and 3.	
		3. "CSI"	RTI not registered	Error:	
		4. None	CSI, RTI not registered	Return Receipt (processed/error)	
Mail delivery, memory transfer, SMTP	From	RTI or CSI of the station designated for delivery	Mail delivery	Fax Message No. + File Number	
receiving and delivery		RTI or CSI of sender	Mail sending from G3 memory		

	Mail address of sender	Memory sending	
	Mail address of sender	SMTP receiving and delivery (Off Ramp Gateway)	
Mail error notification	 Error Message No. xxxx From CSI (RTI)		

Items 1 2 3 of the table above are in the Subject.

Subjects Displayed on the PC



b868d505

E-mail Messages

After entering the subject, you can enter a message with:

Sub TX Mode> E-mail Options

An e-mail message (up to 5 lines) can be pre-registered with: User Tools> System Settings> File Transfer> Program/Change/Delete E-mail Message

Limitations on Entries

Item	Maximum
Number of Lines	5 lines
Line Length	80 characters
Name Length	20 characters

Message Disposition Notification (MDN)

For details: Core Technology Manual – Facsimile Processes – Faxing from a PC – Internet/LAN Fax Boards – E-mail Options

The network system administrator can confirm whether a sent mail has been received correctly or not. This function is enabled only when "I-FAX switch 02 Bit 4" is set to "1"This confirmation is done in four steps.

- 1. Send request for confirmation of mail reception. To enable or disable this request (known as MDN):
- 2. Sub TX Mode> E-mail Options
- 3. Mail reception (receive confirmation request)
- 4. Send confirmation of mail reception
- 5. Receive confirmation of mail reception

The other party's machine will not respond to the request unless the two conditions below are met:

- The other party's machine must be set up to respond to the confirmation request.
- The other party's machine must support MDN (Message Disposition Notification).
- Setting up the Receiving Party -

The receiving party will respond to the confirmation request if:

- 1. The "Disposition Notification To" field is in the received mail header (automatically inserted in the 4th line in the upper table on the previous page, if MDN is enabled), and
- 2. Sending the disposition notification must be enabled (User Parameter Setting SW21 (15 [H]) Bit 1 for this model). The content of the response is as follows:

Normal reception:	"Return Receipt (dispatched)" in the Subject line
IFAX SW02 (Bit 2, 3)	"Return Receipt (displayed)" in the Subject line
Error:	"Return Receipt (processed/error)" in the Subject line

Handling Reports

1. Sending a Request for a Return Receipt by Mail

After the mail sender transmits a request for a return receipt, the mail sender's journal is annotated with two hyphens (--) in the Result column and a "Q" in the Mode column.

- 2. Mail Receipt (Request for Receipt Confirmation) and Sending Mail Receipt Response
 - After the mail receiver sends a response to the request for a return receipt, the mail receiver's journal is annotated with two hyphens (--) in the Result column and an "A" in the Mode column.
- 3. Receiving the Return Receipt Mail
 - After the mail sender receives a return receipt, the information in the mail sender's journal about
 the receipt request is replaced, i.e. the journal is annotated with "OK" in the Result column.
 - When the return receipt reports an error, the journal is annotated with an "E" in the Result column.
 - The arrival of the return receipt is not recorded in the journal as a separate communication. Its arrival is only reported by the presence of "OK" or "E" in the Result column.

If the mail address used by the sender specifies a mailing list (i.e., a Group destination; the
machine sends the mail to more than one location. See "How to set up Mail Delivery"), the Result
column of the Journal is updated every time a return receipt is received. For example, if the
mailing list was to 5 destinations, the Result column indicates the result of the communication with
the 5th destination only. The results of the communications to the first 4 destinations are not shown.

Exceptions: If one of the communications had an error, the Result column will indicate E, even if subsequent communications were OK.

If two of the communications had an error, the Journal will indicate the destination for the first error only.

Report Sample

DATE	TIME	ADDRESS MODE TIME	PAGE
		RESULT	
MAY. 5	10:15	fuser_01@dom1g. ricoh. co. Mail SM 0'09"	2
	10:16	fuser_01@dom1g. ricoh. co. Mail SMQ 0'05"	1
	10:17	s_tadashi@dom1g. ricoh. co. Mail SMQ 0'09"	2
	10:19	m_masataka@dom1g. ricoh. co. Mail SMA 0'05"	1

b868d506

IP-Fax

What is IP-FAX?

For details: Core Technology Manual – Facsimile Processes – Faxing from a PC – Internet/LAN Fax Boards – IP-FAX

T.38 Packet Format

TCP is selected by default for this machine, but you can change this to UDP with IPFAX SW 00 Bit 1.

UDP Related Switches

IP-Fax Switch 01						
No.	FUNCTION					COMMENTS
	Select IP FAX Delay Level					Raise the level by selecting a higher setting if too
	Bit3	Bit2	Bit 1	BitO	Setting	many transmission errors are occurring on the network.
	0	0	0	0	Level 0	If TCP/UDP is enabled on the network, raise this
0-3	0	0	0	1	Level 1	setting on the T.30 machine. Increasing the delay time allows the recovery of more lost packets.
	0	0	1	0	,	If only UDP is enabled, increase the number of
	0	0	1	1	Level 3	redundant packets. Level 1~2: 3 Redundant packets
						Level 3: 4 Redundant packets

Settings

User parameter switch 34 (22[H]), bit 0

IP-Fax Gate Keeper usage 0: No, 1: Yes

IP Fax Switches: Various IP-FAX settings (see the bit switch table)

6. Specifications

General Specifications

Туре:	Desktop type transceiver			
C: 'i	PSTN			
Circuit:	PABX			
Connection:	Direct couple			
	Book (Face down)			
	Maximum Length: 432 mm [17 ins]			
	Maximum Width: 297 mm [11.7 ins]			
	ARDF (Face up)			
Original Sizar	(Single-sided document)			
Original Size:	Length: 128 - 1200 mm [5.0 - 47.2 ins]			
	Width: 105 - 297 mm [4.1 - 11.7 inch]			
	(Double-sided document)			
	Length: 128 - 432 mm [5.0 - 17 inch]			
	Width: 105 - 297 mm [4.1 - 11.7 inch]			
Scanning Method:	Flat bed, with CCD			
	G3			
	8 x 3.85 lines/mm (Standard)			
Resolution:	8 x 7.7 lines/mm (Detail)			
Resolution:	8 x 15.4 line/mm (Fine)			
	200 x 100 dpi (Standard)			
	200 x 200 dpi (Detail)			
Transmission Time: G3: 3 s at 28800 bps; Measured with G3 ECM using memory T #1 test document (Slerexe letter) at standard resolution				
Data Compression:	MH, MR, MMR, JBIG			
Protocol:	Group 3 with ECM			
Modulation:	V.34, V.33, V.17 (TCM), V.29 (QAM),			

	V.27ter (PHM), V.8, V.21 (FM)		
Data Rate:	G3: 33600/31200/28800/26400/24000/21600/ 19200/16800/14400/12000/9600/7200/4800/2400 bps Automatic fallback		
With ECM: 0 ms/line Without ECM: 2.5, 5, 10, 20, or 40 ms/line			
Memory Capacity:	ECM: 128 KB SAF Standard: 4 MB Page Memory: Standard: 4 MB (Print: 2 MB + Scanner: 2 MB)		

IFAX Specifications


	Local area network		
Connectivity:	Ethernet 100base-Tx/10base-T		
Commounting.	IEEE1394 (IP over 1394)		
	IEEE802.11b (wireless LAN)		
	Main scan: 400 dpi, 200 dpi		
Resolution:	Sub scan: 400 dpi, 200 dpi, 100 dpi		
	To use 400 dpi, IFAX SW01 Bit 4 must be set to "1".		
	1 s (through a LAN to the server)		
	Condition: ITU-T #1 test document (Selerexe Letter)		
	MTF correction: OFF		
T	TTI: None		
Transmission Time:	Resolution: 200 x 100 dpi		
	Communication speed: 10 Mbps		
	Correspondent device: E-mail server		
	Line conditions: No terminal access		
	Maximum message width is A4/LT.		
Document Size:	U Note		
Document Size.	• To use B4 and A3 width, IFAX SW00 Bit 1 (B4) and/or Bit 2 (A3) must be set to "1".		
	Single/multi-part		
E-mail File Format:	MIME conversion		
	Image: TIFF-F (MH, MR, MMR)		
	Transmission:		
Darland	SMTP, TCP/IP		
Protocol:	Reception:		
	POP3, SMTP, IMAP4, TCP/IP		
Data Rate:	100 Mbps(100base-Tx)		
Dala Kale:	10 Mbps (10base-T)		

Authentication Method:	SMTP-AUTH POP before SMTP A-POP
Remark:	The machine must be set up as an e-mail client before installation. Any client PCs connected to the machine through a LAN must also be e-mail clients, or some features will not work (e.g. Autorouting).

IP-FAX Specifications

Network:	Local Area Network Ethernet/10base-T, 100base-TX IEEE1394 (IP over 1394) IEEE802.11b (wireless LAN)			
Scan line density:	8 x 3.85 lines/mm, 200 x 100dpi (standard characters) 8 x 7.7lines/mm, 200 x 200dpi (detailed characters)			
Original size:	Maximum A3 or 11"x 17" (DLT)			
Maximum scanning size:	Standard: A3, 297mm x 432mm Irregular: 297mm x 1200mm			
Transmission protocol:	Recommended: T.38 Annex protocol, TCP, UDP/IP communication			
Compatible machines:	IP-Fax compatible machines			
IP-Fax transmission function:	Specify IP address and send fax to an IP-Fax compatible fax through a network. Also capable of sending fax from a G3 fax connected to the public telephone lines via a VoIP gateway.			
IP-Fax reception function:	Receive a fax sent from an IP-Fax compatible fax through a network. Also capable of receiving fax from a G3 fax connected the public telephone lines via a VoIP gateway.			

Fax Unit Configuration

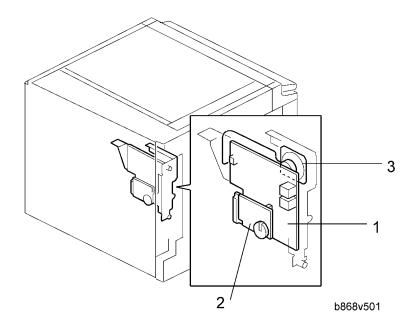

Component	Code	No.	Remarks
FCU		1	
MBU	B868	2	Included with fax unit
Speaker		3	
Handset Type 1018	B433	-	NA only. Common with PG-C1