

PAPER TRAY UNIT

(Machine Code: G313)

1. REPLACEMENT AND ADJUSTMENT

⚠ CAUTION


Turn off the main power switch and unplug the machine before beginning any of the procedures in this section.

NOTE: This manual uses the following symbols.

☛ : See or Refer to 🔩 : Screws 📡 : Connector 📌 : Clip ring

1.1 REAR COVER


1. 2 brackets (1 Cylinder-headed screw for each)
2. Rear cover [A] (🔩 x 2)

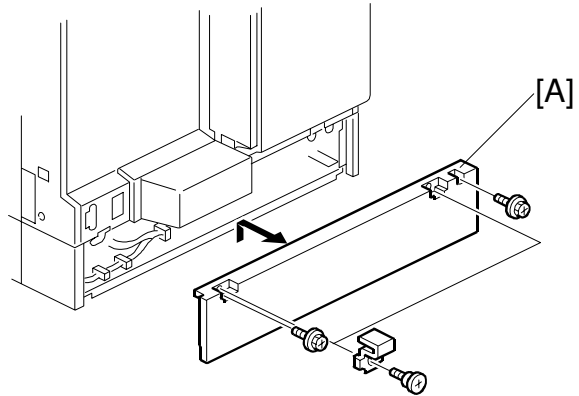

G313R101.WMF

1.2 PAPER FEED CLUTCH

1. Rear cover (☛ 1.1)
2. Bracket [A] (🔩 x 1)
3. Clutch [B] (1 bearing, 📡 x 1)

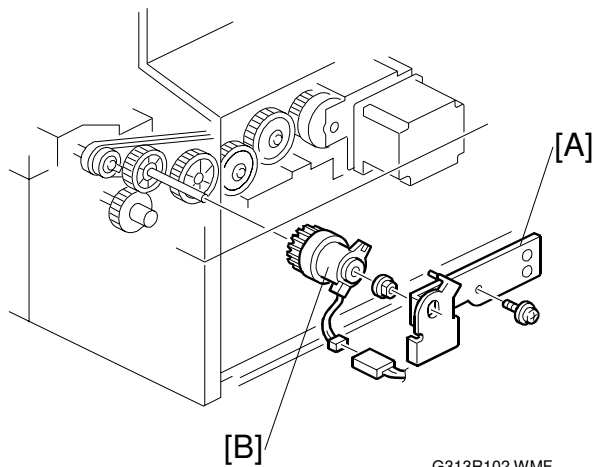


G313R102.WMF

Peripherals

1.3 LIFT MOTOR

1. Rear cover (☛ 1.1)
2. Lift motor [A] (⚙ x 2, 📏 x 1)

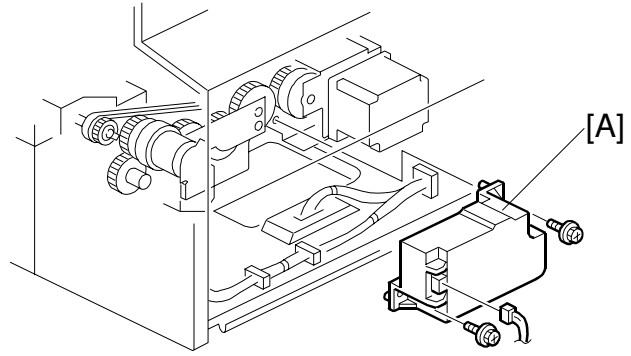


G313R103.WMF

1.4 PAPER FEED MOTOR

1. Rear cover (☛ 1.1)
2. Paper feed motor [A] (📏 x 1, ⚙ x 3)


NOTE: Remove the motor with its bracket, then separate the motor from the bracket.

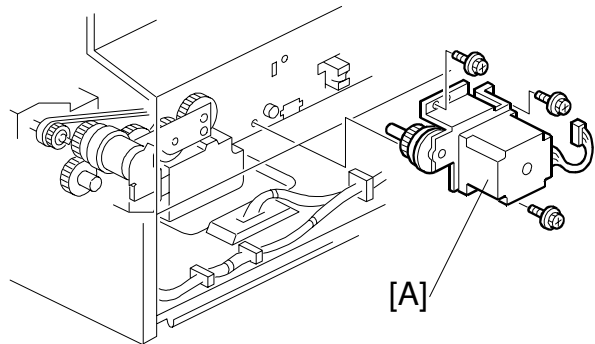

G313R104.WMF

1.5 CONTROLLER BOARD


1. Rear cover (☛ 1.1)
2. Controller board [A] (📏 x 7, ⚙ x 2)

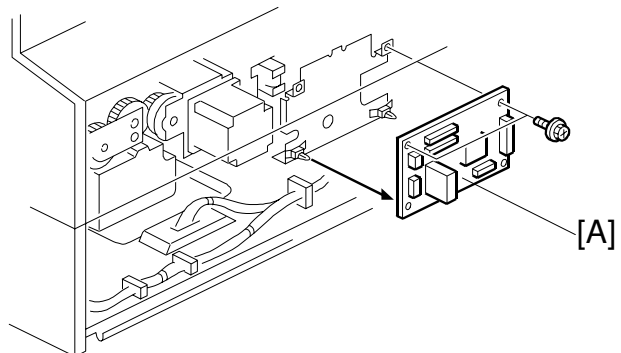

G313R105.WMF

1.6 PICK-UP/FEED/SEPARATION ROLLERS


1. Paper tray [A]
2. Pick-up roller [B] (1 hook)
3. Paper feed roller [C] (⌘ x 1)
4. Separation roller [D] (⌘ x 1)

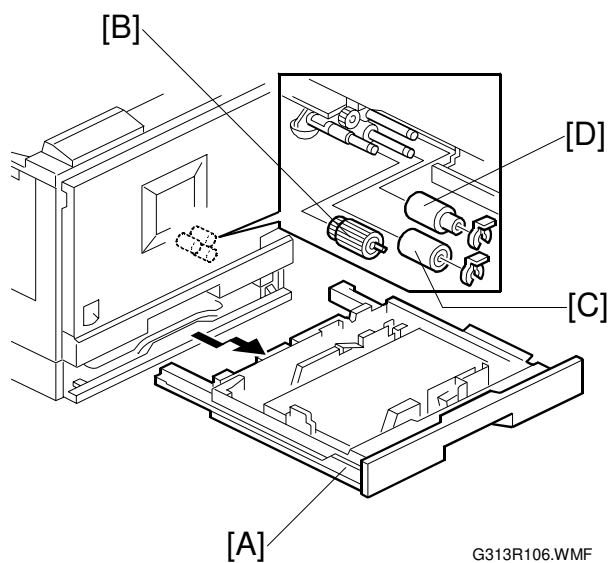

G313R106.WMF

2. DETAILED DESCRIPTIONS

2.1 MECHANICAL COMPONENT LAYOUT

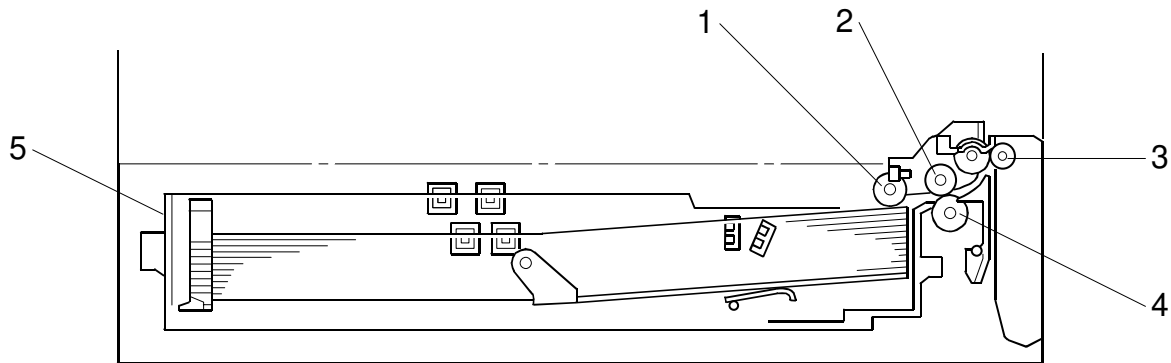

G313D101.WMF

1. Pick-up roller
2. Feed roller
3. Relay roller
4. Separation roller
5. Tray

Feed and Reverse Roller (FRR)

☛ **CT** Handling Paper – Paper Feed – Paper Feed Methods


Drive Path

Paper feed motor → Timing belt → Gears → Paper feed clutch → Rollers

Paper End Feeler Method

☛ **CT** Handling Paper – Paper End Detection


2.2 ELECTRICAL COMPONENT LAYOUT

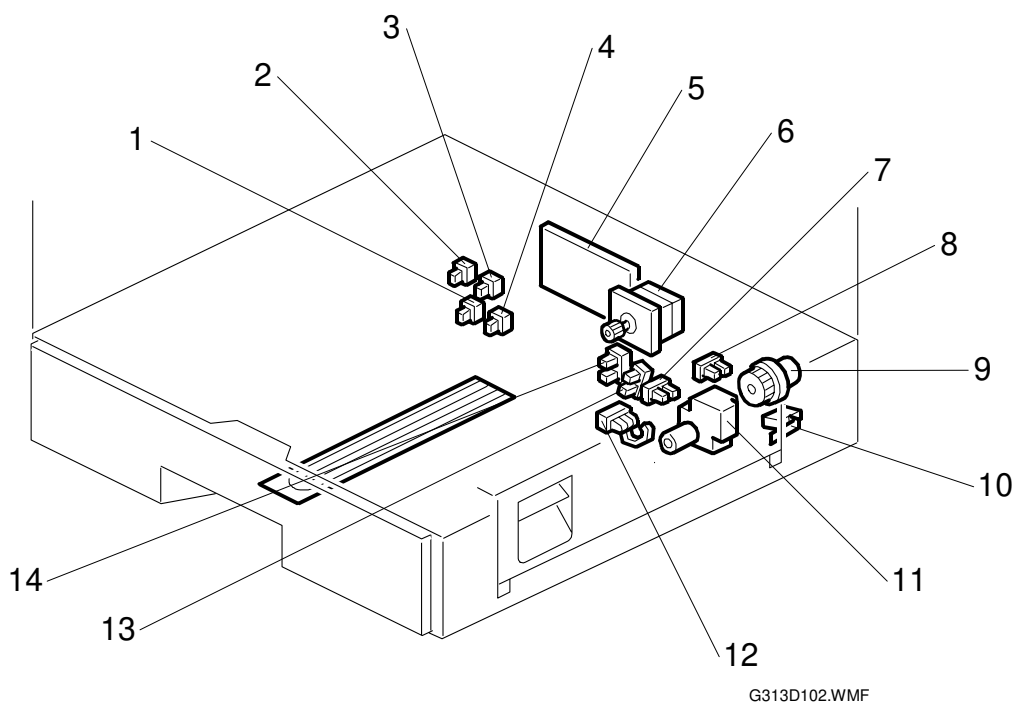

G313D102.WMF

- | | |
|------------------------|---------------------------|
| 1. Paper size switch 2 | 8. Lift sensor |
| 2. Paper size switch 1 | 9. Paper feed clutch |
| 3. Paper size switch 3 | 10. Vertical guide switch |
| 4. Paper size switch 4 | 11. Tray lift motor |
| 5. Main board | 12. Relay sensor |
| 6. Paper feed motor | 13. Paper height 2 sensor |
| 7. Paper end sensor | 14. Paper height 1 sensor |


2.3 DRIVE LAYOUT

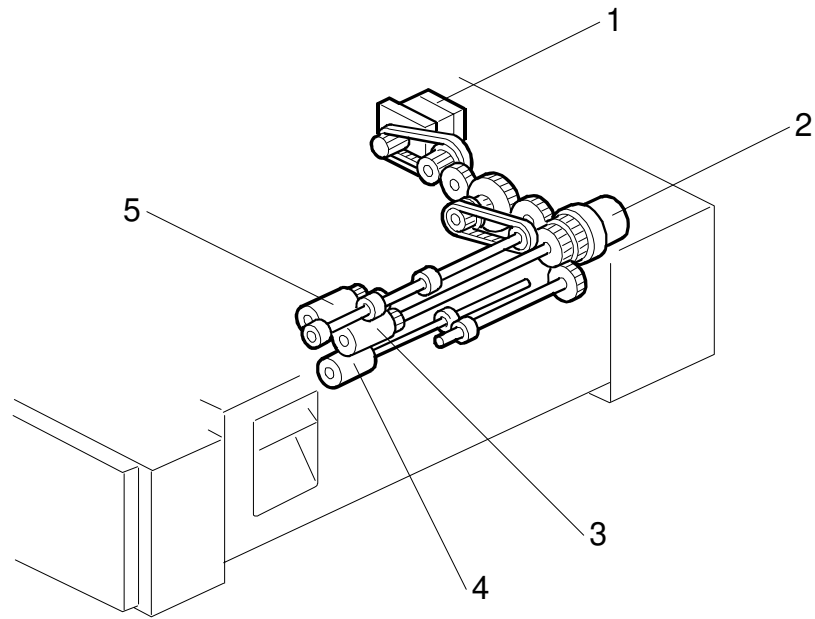

G313D103.WMF

1. Paper feed motor
2. Paper feed clutch
3. Paper feed roller
4. Separation roller
5. Pick-up roller

2.4 PAPER SIZE DETECTION

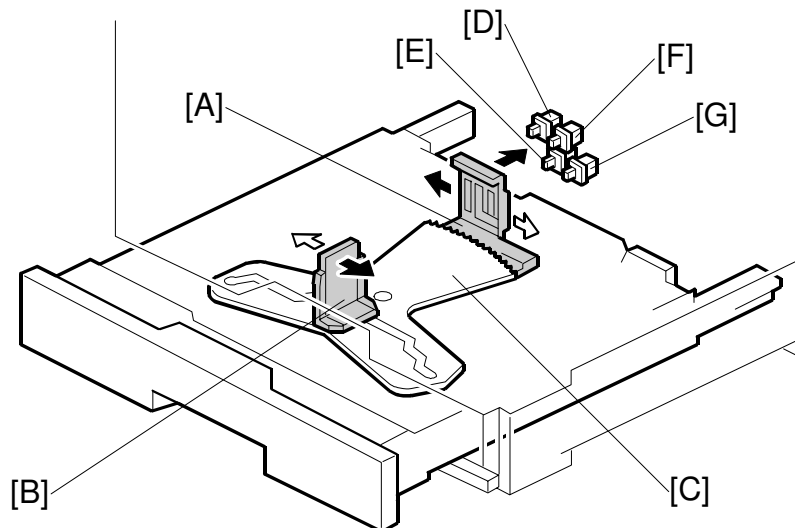

G313D104.WMF


Four paper size switches [D] to [G], working in combination, detect the paper size as shown in the table below. The actuators are on the side plate [A]. The side plate is moved by the end plate [B] through a cam [C].

Models		Switch Location			
North America	Europe/Asia	1 [D]	2 [E]	3 [F]	4 [G]
11" x 17" SEF	11" x 17" SEF	0	0	1	0
A3 SEF	A3 SEF	0	1	0	1
8 1/2" x 14" SEF	B4 SEF	1	0	1	1
8 1/2" x 11" SEF	A4 SEF	0	1	1	0
11" x 8 1/2" LEF	11" x 8 1/2" LEF	1	1	0	1
A4 LEF	A4 LEF	1	0	1	0
B5 LEF	B5 LEF	0	1	0	0
A5 LEF	A5 LEF	1	0	0	0

1: Pushed

NOTE: 1) Other paper sizes cannot be automatically detected. Use the user tool to select them.
 2) The machine disables feed from a tray if the paper size cannot be detected (when the paper size actuator is broken or no tray is installed).


2.5 PAPER LIFT

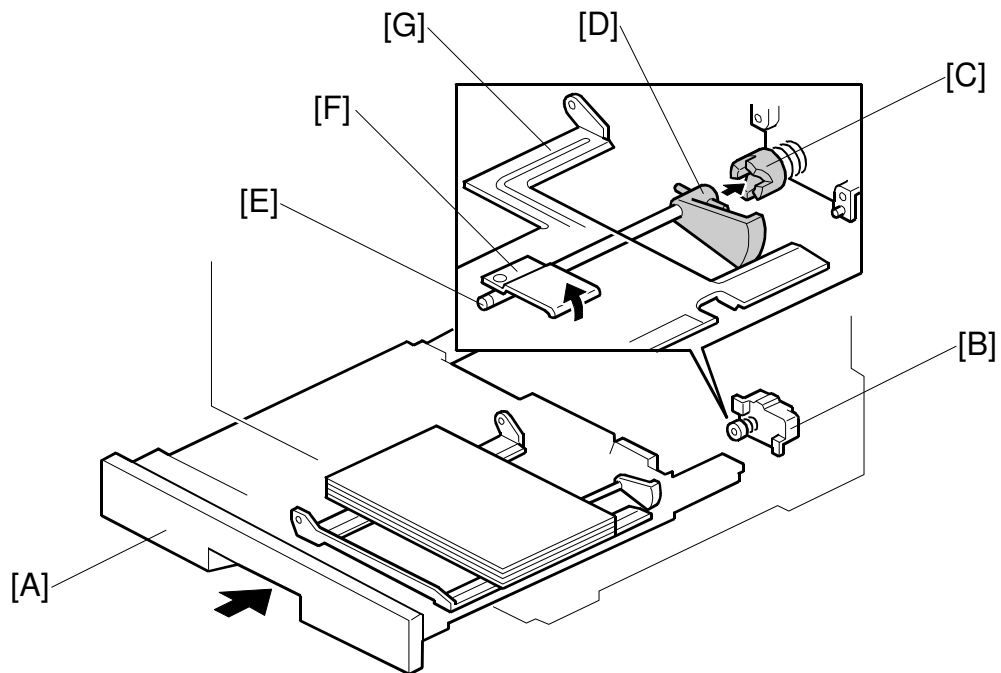

G313D105.WMF

The paper size switches (➡ 2.4) detect when the paper tray [A] is placed in the machine. When the machine detects that a tray has been placed in the machine, the tray lift motor [B] rotates and the coupling gear [C] on the tray lift motor engages the pin [D] on the lift arm shaft [E]. Then the tray lift arm [F] lifts the tray bottom plate [G] until the paper lift sensor for the tray detects that the top of the stack is at the paper feed position.

2.6 PAPER HEIGHT AND END DETECTION

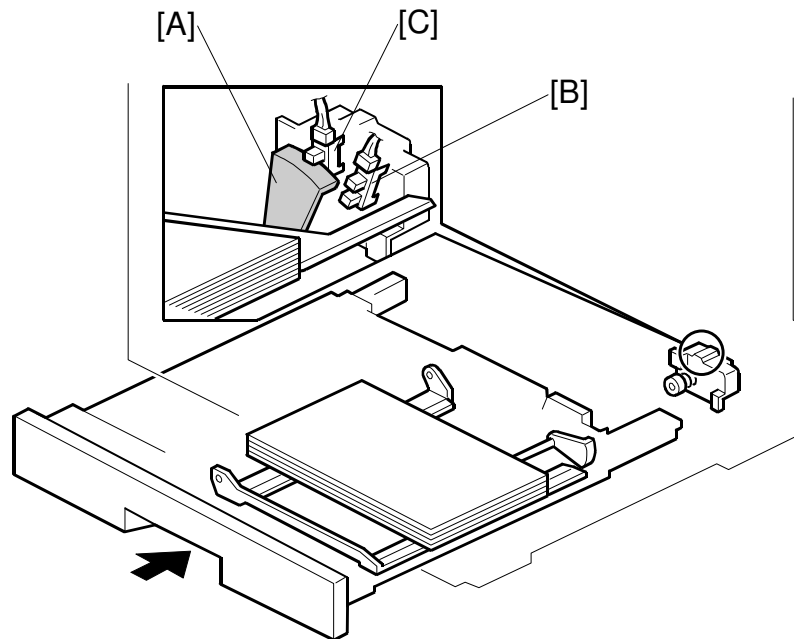

G313D106.WMF

Paper Height Detection

Two paper height sensors, working in combination, detect the amount of paper in the tray.

When the amount of paper decreases, the bottom plate pressure lever moves up and the actuator [A] (on the pressure lever drive shaft) rotates.

Remaining paper	Paper height sensor 2 [B]	Paper height sensor 1 [C]
Full	ON	ON
Nearly full	OFF	ON
Near end	OFF	OFF

On: Actuator inside sensor, Off: Actuator not inside sensor

Paper End Detection

If there is some paper in the paper tray, the paper stack raises the paper end feeler and the paper end sensor deactivates.

When the paper tray runs out of paper, the paper end feeler drops into the cutout in the tray bottom plate, and this activates the paper end sensor.