

Network Interface Board Type GX3

For Machine Code: J016

(Code:J512-17)

INSTALLATION GUIDE


Important

- ☐ Be sure to switch the printer off before installing or removing the network interface board.
- ☐ When installing the network interface board, be sure to secure it using the screw that is supplied with the board.
- ☐ After installing the network interface board, be sure to reattach the network interface board cover to the printer.
- ☐ Before touching the network interface board, ground yourself by touching something metal to discharge any static electricity.
- ☐ Do not subject the network interface board to impact or other physical stress.

1 Make sure the printer's power cord is unplugged.

2 Using a coin, turn the network interface board cover screw counterclockwise, and then remove the cover.


3 Remove the spacer in the network interface board cover.



AKR130S

The removed spacer will not be used again.

4 Align network interface board notch with the triangular mark on the printer, and then push in the network interface board in by pressing the part marked "PUSH".

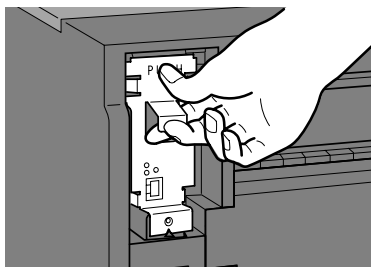

BAH330S

5 Reattach the network interface board cover to the printer, and then secure it with the screw provided.

Note

- ❑ Be sure to push the network interface board fully into the printer.
- ❑ If the network interface board is not installed properly, repeat the entire installation procedure.
- ❑ To check whether the network interface board has been installed correctly, print the configuration page. If the network interface board has been installed correctly, its device name appears under "Connection Equipment".
- ❑ If you cannot install it properly even after attempting reinstallation, contact your sales or service representative.

Reference

For details about specifying the network settings and printing the configuration page, see User Guide.

Dispose of the removed component as general plastic waste or hand it in for collection.

CE Marking Traceability Information (For EU Countries Only.)

Manufacturer:

Ricoh Co., Ltd.

3-6 Nakamagome 1-chome, Ohta-ku,
Tokyo, 143-8555 Japan

Authorized representative:

Ricoh Europe PLC

66 Chiltern Street London W1U 4AG
U.K.