

C9065/C9075
MP C6501sp/C7501sp
LD365C/LD375C
Aficio™ MP C6501sp/C7501sp

Operating Instructions Printer Reference



- 1 Preparing the Machine
- 2 Printing Documents
- 3 Printing Stored Documents
- 4 Printing a PDF File Directly
- Saving and Printing Using the Document Server
- 6 Printer Features
- 7 Appendix

TABLE OF CONTENTS

Manuals for This Machine	5
Notice	7
Important	7
How to Read This Manual	8
Symbols	8
Machine Types	8
Names of Major Items	8
Notes	9
Laws and Regulations	10
Legal Prohibition	10
Model-Specific Information	11
1. Preparing the Machine	
Confirming the Connection Method	13
Network Connection	13
Local Connection	15
Installing the Printer Driver	17
Quick Install	18
Installing the Printer Driver for the Selected Port	20
Using the Standard TCP/IP Port	20
Using the IPP Port	21
Using the LPR Port	22
Using the WSD Port	24
Using the SmartDeviceMonitor for Client Port	25
Using as a Windows Network Printer	30
Using as a NetWare Print Server/Remote Printer	32
Form Feed	33
Banner Page	34
Printing after Resetting the Printer	34
Installing the Printer Driver Using USB	35
Windows 2000 - USB	35
Windows XP, Windows Server 2003/2003 R2 - USB	36
Windows Vista, Windows Server 2008 - USB	37
Printing with Parallel Connection	39

Making Option Settings for the Printer	41
Conditions for Bidirectional Communication	41
If Bidirectional Communication Is Disabled	42
Installing Font Manager	43
Using Adobe PageMaker Version 6.0, 6.5, or 7.0	44
2. Printing Documents	
Displaying the Printer Driver Settings Screen	45
Making Printer Default Settings - the Printer Properties	45
Making Printer Default Settings - Printing Preferences	45
Making Printer Settings from an Application	46
Making Printer Settings - One Click Presets	47
Setting Paper on the Bypass Tray	48
Setting the Paper Size Using the Control Panel	49
Setting Custom Size Paper Using the Control Panel	51
Setting Thick Paper, Thin Paper or OHP Transparencies Using the Control Panel	53
Setting Envelopes Using the Control Panel	55
Printing on Orientation-Fixed or Two-Sided Paper	60
Frequently Used Print Methods	62
Standard Printing	62
Printing on Both Sides of Sheets	64
Combining Multiple Pages into Single Page	66
Advanced Printing	70
Menu Names and Brief Overview of Each Function	70
Collate	71
Staple	73
Punch	77
Fold	79
Tab Stock Printing	82
Ring Binding	83
Cover Sheet	84
Chapter Page	87
Slip Sheets	89
User Defined Pages	90

Watermarks	91
If Error Occurs with the Specified Paper Size and Type	94
Printing from a Selected Tray	95
Canceling a Print Job	95
Spool Printing	97
Registering Classification Codes	99
Configuring Classification Codes	100
Specifying the Classification Code for a Print Job	100
3. Printing Stored Documents	
Display Panel	
Initial Display	103
Simplified Display	104
Using the Print Job Function	106
Selecting the Initial Print Job List	106
Printing from the Print Job Screen	111
Sample Print	111
Locked Print	114
Hold Print	117
Stored Print	120
Printing from the Jobs Per User ID Screen	125
Printing the Selected Print Job	125
Printing All Print Jobs	126
Job List	129
Job List Screen	129
Checking Jobs in the Job List	130
Changing the Order of Jobs	131
Holding Jobs	131
Deleting Jobs	132
Checking the Job History	132
Canceling a Print Job	134
Canceling a Print Job Using the Control Panel	134
Windows - Canceling a Print Job from the computer	135
Checking the Error Log	136

4. Printing a PDF File Directly

Using DeskTopBinder Lite	139
Expanding DeskTopBinder Lite Features	139
Function Palette	140
PDF Direct Printing Using Function Palette	141
PDF Direct Print Properties	142
Using UNIX Commands	144
Sending a PDF file	144
Entering the PDF Password	144
5. Saving and Printing Using the Document Server	
Accessing the Document Server	
6. Printer Features	
Accessing User Tools	147
Changing Default Settings	147
Quitting User Tools	147
List / Test Print	149
Printing the Configuration Page	150
Maintenance	152
System	153
Host Interface	157
PCL Menu	158
PS Menu	160
PDF Menu	162
7. Appendix	
Using the Virtual Printer	165
Adding a Virtual Printer	165
Changing a Virtual Printer Configuration	166
Confirming a Virtual Printer Configuration	166
Deleting a Virtual Printer	167
Printing Using a Virtual Printer	167
Specifications	169
Trademarks	171
INDEX	173

Manuals for This Machine

Read this manual carefully before you use this machine.

Refer to the manuals that are relevant to what you want to do with the machine.

- · Media differ according to manual.
- The printed and electronic versions of a manual have the same contents.
- Adobe Acrobat Reader/Adobe Reader must be installed in order to view the manuals as PDF files.
- A Web browser must be installed in order to view the html manuals.

About This Machine

Before using the machine, be sure to read the section of this manual entitled Safety Information.

This manual introduces the machine's various functions. It also explains the control panel, preparation procedures for using the machine, how to enter text, how to install the CD-ROMs provided, and how to replace paper, toner, staples, and other consumables.

Troubleshooting

Provides a guide for resolving common usage-related problems.

Copy and Document Server Reference

Explains Copier and Document Server functions and operations. Also refer to this manual for explanations on how to place originals.

Facsimile Reference

Explains Facsimile functions and operations.

Printer Reference

Explains Printer functions and operations.

Scanner Reference

Explains Scanner functions and operations.

Network and System Settings Reference

Explains how to connect the machine to a network, configure and operate the machine in a network environment, and use the software provided. Also explains how to change User Tools settings and how to register information in the Address Book.

Security Reference

This manual is for administrators of the machine. It explains security functions that you can use to prevent unauthorized use of the machine, data tampering, or information leakage. For enhanced security, we recommend that you first make the following settings:

- Install the Device Certificate.
- Enable SSL (Secure Sockets Layer) Encryption.

• Change the user name and password of the administrator using Web Image Monitor.

For details, see "Setting Up the Machine", Security Reference.

Be sure to read this manual when setting the enhanced security functions, or user and administrator authentication.

PostScript 3 Supplement

Explains how to set up and use PostScript 3.

VM Card Extended Feature Settings Device Reference

Explains how to set up the extended features settings with the machine.

VM Card Extended Feature Settings Web Reference

Explains how to set up the extended features settings using Web Image Monitor.

Other manuals

- UNIX Supplement
- · Quick Reference Copy Guide
- Quick Reference Printer Guide
- Quick Reference Fax Guide
- Quick Reference Scanner Guide
- App2Me Start Guide



- Manuals provided are specific to machine types.
- For "UNIX Supplement", please visit our Web site or consult an authorized dealer. This manual includes descriptions of functions and settings that might not be available on this machine.

Notice

Important

In no event will the company be liable for direct, indirect, special, incidental, or consequential damages as a result of handling or operating the machine.

For good copy quality, the supplier recommends that you use genuine toner from the supplier.

The supplier shall not be responsible for any damage or expense that might result from the use of parts other than genuine parts from the supplier with your office products.

How to Read This Manual

Symbols

This manual uses the following symbols:

Indicates points to pay attention to when using the machine, and explanations of likely causes of paper misfeeds, damage to originals, or loss of data. Be sure to read these explanations.

UNote

Indicates supplementary explanations of the machine's functions, and instructions on resolving user errors.

■ Reference

This symbol is located at the end of sections. It indicates where you can find further relevant information.

[]

Indicates the names of keys on the machine's display or control panels.

Machine Types

This machine comes in two models which vary in copy/print speed.

	Туре 1	Туре 2
Copy/print speed (Full Color)	60 sheets/minute (A4 \overline{D} , 8 $^{1}/_{2}$ × 11 \overline{D})	70 sheets/minute (A4 \overline{D} , 8 $^{1}/_{2}$ × 11 \overline{D})
Copy/print speed (B&W)	65 sheets/minute (A4 ^D , 8 ¹ / ₂ × 11 ^D)	75 sheets/minute (A4 \overline{D} , 8 $^1/_2$ × 11 \overline{D})

Names of Major Items

Major items of this machine are referred to as follows in this manual:

- Auto Document Feeder → ADF
- Large capacity tray → LCT
- Wide large capacity tray → Wide LCT
- Multi-Folding Unit FD5000 → Multi-Folding Unit
- Ring Binder RB5000 → Ring Binder

Notes

Contents of this manual are subject to change without prior notice.

Colors on color keys or the color circle may differ slightly from the colors of actual copies.

Two kinds of size notation are employed in this manual.

Some illustrations in this manual might be slightly different from the machine.

Certain options might not be available in some countries. For details, please contact your local dealer.

Depending on which country you are in, certain units may be optional. For details, please contact your local dealer.

Laws and Regulations

Legal Prohibition

Do not copy or print any item for which reproduction is prohibited by law.

Copying or printing the following items is generally prohibited by local law:

bank notes, revenue stamps, bonds, stock certificates, bank drafts, checks, passports, driver's licenses.

The preceding list is meant as a guide only and is not inclusive. We assume no responsibility for its completeness or accuracy. If you have any questions concerning the legality of copying or printing certain items, consult with your legal advisor.

This machine is equipped with a function that prevents making counterfeit bank bills. Due to this function the original images similar to bank bills may not be copied properly.

Model-Specific Information

In this manual, model-specific information is indicated by the following marks:

220-240V


Indicates information that is specific to the 220 to 240 V model.

110-127V / 208-240V

Indicates information that is specific to the 110 to 127 V model or 208 to 240 V model.



• To identify the model, open the bypass tray, and then check the label on the right side of the machine.



 Dimensions in this manual are given in two units of measure: metric and inch. If your machine is the 220 to 240 V model, refer to the metric units. If your machine is the 110 to 127 V model or 208 to 240 V model, refer to the inch units.

1. Preparing the Machine

This chapter describes how to connect this machine to your computer, and install the printer driver.

Confirming the Connection Method

This machine supports network and local connection.

Before installing the printer driver, check how the machine is connected. Follow the driver installation procedure that is appropriate to the connection method.


Network Connection

This machine can be used as a Windows printing port or network printer.

Using this machine as the Windows printing port

Network connections can be established through Ethernet, and Wireless LAN.

Available ports are determined based on the combination of Windows operating system version and connection method used.

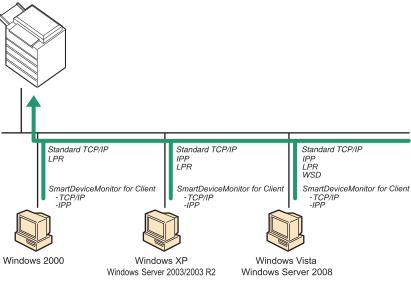

BVC013S

13

Windows 2000

Connection Method	Available Ports
• Ethernet	Standard TCP/IP port
Wireless LAN	LPR port
	SmartDeviceMonitor for Client port

Windows XP, Windows Server 2003/2003 R2

Connection Method	Available Ports
Ethernet	Standard TCP/IP port
Wireless LAN	IPP port
	• LPR port
	SmartDeviceMonitor for Client port

Windows Vista, Windows Server 2008

Connection Method	Available Ports
• Ethernet	Standard TCP/IP port
Wireless LAN	IPP port
	• LPR port
	WSD port
	SmartDeviceMonitor for Client port

U Note

- See the explanation about how to install the printer driver for each type of port.
- For details about Standard TCP/IP port, see "Installing the Printer Driver".
- For details about IPP port, see "Installing the Printer Driver".
- For details about LPR port, see "Installing the Printer Driver".
- For details about WSD port, see "Installing the Printer Driver".
- For details about SmartDeviceMonitor for Client port, see "Installing the Printer Driver".


■ Reference

• p.17 "Installing the Printer Driver"

Using as a network printer

This machine can be used as the Windows network printer, the NetWare print server, or the NetWare remote printer.

IPX/SPX (NetWare) cannot be used under Windows Vista and Windows Server 2008.

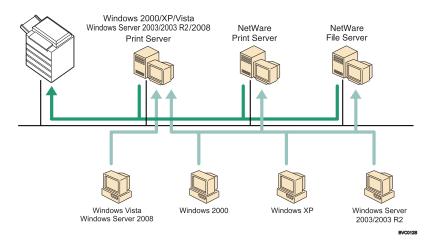



- In an IPv6 environment, NetWare servers cannot be used.
- See the explanation about how to install the printer driver for each type of network printer.
- For details about Windows network printer, see "Using as a Windows Network Printer".
- For details about NetWare print server and remote printer, see "Using as a NetWare Print Server/ Remote Printer".

■ Reference

- p.30 "Using as a Windows Network Printer"
- p.32 "Using as a NetWare Print Server/Remote Printer"

Local Connection

Local connections can be established via parallel, USB, and Bluetooth connections.

UNote

- See the explanation about how to install the printer driver for each method of connections.
- For details about Bluetooth connections, see "Printing with Bluetooth Connection", Network and System Settings Reference.
- For details about USB connections, see "Installing the Printer Driver Using USB".

• For details about parallel connections, see "Printing with Parallel Connection".

■ Reference

- p.35 "Installing the Printer Driver Using USB"
- p.39 "Printing with Parallel Connection"

Installing the Printer Driver

This section explains how to install the printer driver. There are two ways to install the printer driver: using Quick Install, which installs the printer driver, or installing the appropriate driver according to the port you want to use.

Downloading the Printer Driver

You can install the printer driver from the CD-ROM provided with this machine or download it from the supplier's Web site.

If your operating system is Windows XP Pro x64, Windows Vista x64, or Windows Server 2003 x64/2003 R2 x64/2008 x64, you must download the printer driver from the supplier's Web site. Select this machine and the operating system you are using, and then download it.



• The PostScript 3 printer driver is also available for this machine. For details about installing and configuring the PostScript 3 printer driver, see PostScript 3 Supplement.

1

Quick Install

You can install the printer drivers easily from the CD-ROM provided with this machine.

Using Quick Install, the PCL 6 printer driver is installed under network environment, and the Standard TCP/IP port will be set.



- Manage Printers permission is required to install the drivers. Log on as an Administrators group member.
- If you connect using USB, see "Installing the Printer Driver Using USB" and install the printer driver.
- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [Quick Install].

The software license agreement appears in the [License Agreement] dialog box.

- 5. After reading the agreement, click [I accept the agreement.], and then click [Next >].
- 6. Select the machine model you want to use in the [Select Printer] dialog box.

For network connection via TCP/IP, select the machine whose IP address is displayed in [Connect Tol.

For parallel connection, select the machine whose printer port is displayed in [Connect To].

7. Click [Install].

The printer driver installation starts.

The PCL 6 printer driver is installed in the language specified by your operating system.

8. Click [Finish].

A message about restarting the computer appears. Restart the computer to complete installation.

9. Click [Exit] in the first dialog box of the installer, and then take out the CD-ROM.



- To stop installation of Quick Install, click [Cancel] before installation is complete.
- Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.
- Quick Install is not available unless bidirectional communication between the machine and computer
 is enabled via parallel connection. For details about meeting the bidirectional communication
 conditions, see "Making Option Settings for the Printer".

■ Reference

- p.35 "Installing the Printer Driver Using USB"
- p.41 "Making Option Settings for the Printer"

٦

Installing the Printer Driver for the Selected Port

You can install the appropriate driver according to the port you want to use.

Using the Standard TCP/IP Port

This describes how to install the PCL printer driver using the Standard TCP/IP port.



- Manage Printers permission is required to install the driver. Log on as an Administrators group member.
- In an IPv6 environment, you cannot use the Standard TCP/IP Port. Use the SmartDeviceMonitor for Client port.

Installing the PCL printer driver

- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [PCL Printer Driver].
- 5. The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next >].

6. Select a printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 7. Click [Next >].
- 8. Select the machine model you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

9. Double-click the machine name to display the printer settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 10. Click [Port], and then click [Add].
- 11. Click [Standard TCP/IP Port], and then click [OK].

If [Standard TCP/IP Port] does not appear, see Windows Help and then configure the settings.

12. Click [Next >] in the [Add Standard TCP/IP Printer Port Wizard] dialog box.

13. Enter the machine name or IP address in the [Printer Name or IP Address] box.

The [Port Name] text box automatically obtains a port name. Change this name if necessary. When the device selection appears, select "RICOH NetworkPrinter Driver C Model".

- 14. Click [Next >].
- 15. Click [Finish] in the [Add Standard TCP/IP Printer Port Wizard] dialog box.
 The installation start dialog box reappears.
- 16. Check that the port of the selected printer is displayed in [Port].
- 17. Configure the default printer as necessary.
- 18. Click [Continue].

The printer driver installation starts.

19. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].

Restart the computer to complete installation.



- To stop installation of the selected driver, click [Cancel] before installation is complete.
- Auto Run may not work with certain operating system settings. In that case, launch "Setup.exe" on the CD-ROM root directory.
- A message appears if there is a newer version of the printer driver already installed. If there is, you
 cannot install the printer driver using Auto Run. If you still want to install the printer driver, use [Add
 Printer]. See "Messages Displayed When Installing the Printer Driver", Troubleshooting.

Using the IPP Port

This describes how to install the PCL printer driver using the IPP port.



- Manage Printers permission is required to install the driver. Log on as an Administrators group member.
- In an IPv6 environment, you cannot use the IPP Port. Use the SmartDeviceMonitor for Client port.
- The IPP port cannot be used under Windows 2000. If you are using Windows 2000, install the PCL printer driver using the SmartDeviceMonitor for Client port. To use the SmartDeviceMonitor for Client port, you must first download SmartDeviceMonitor for Client from the supplier's Web site. For details about the SmartDeviceMonitor for Client port, see "Using the SmartDeviceMonitor for Client Port".
- To print via IPP-SSL under Windows Vista or Windows Server 2008, you must install the certificate
 on your computer before you install the printer driver using the IPP port. For details, consult your
 administrator.

Installing the PCL printer driver

- 1. Quit all applications currently running.
- 2. On the [Start] menu, click [Printers and Faxes].
- 3. Click [Add a printer].

The [Add Printer Wizard] dialog box appears.

- 4. Click [Next>].
- 5. Click [A network printer, or a printer attached to another computer].
- 6. Click [Next>].
- 7. Click [Connect to a printer on the Internet or on a home or official network:].
- 8. In the [URL:] box, enter "http:// machine's IP address/ printer (or ipp)" as the machine's address, and then click [Next>].
- 9. Click [Have Disk...].
- 10. Insert the provided CD-ROM into the computer's CD-ROM drive.

If the [AutoPlay] dialog box appears, click the [close] button.

11. Click [Browse...], and then specify a location for the INF file.

If the CD-ROM drive letter is D, the printer driver's source files are stored in "D:\DRIVERS\PCL5C\XP_VISTA\(Language\)\DISK1" or "D:\DRIVERS\PCL6\XP_VISTA\MUI\DISK1".

The PCL 6 printer driver is installed in the language specified by your operating system.

- 12. Click [OK] to close the Install From Disk window.
- 13. Select the machine you want to use, and then click [OK].

If the [Software Installation] message appears, click [Continue Anyway].

- 14. Configure the default printer as necessary, and then click [Next >].
- 15. Click [Finish].

If installation is successful, the icon of the printer connected to the IPP port is added to the [Printers and Faxes] window.



• To stop installation of the selected driver, click [Cancel] before installation is complete.

Reference

• p.25 "Using the SmartDeviceMonitor for Client Port"

Using the LPR Port

This describes how to install the PCL printer driver using the LPR port.

- Manage Printers permission is required to install the driver. Log on as an Administrators group member.
- In an IPv6 environment, you cannot use the LPR Port. Use the SmartDeviceMonitor for Client port.

Installing the PCL printer driver

- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [PCL Printer Driver].
- 5. The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next>].

6. Select a printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 7. Click [Next >].
- 8. Select the machine model you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

9. Double-click the machine name to display the printer settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 10. Click [Port], and then click [Add].
- 11. Click [LPR Port], and then click [OK].

If [LPR Port] does not appear, see Windows Help and install it.

- 12. Enter the machine's IP address in the [Name or address of server providing lpd] box.
- 13. Enter "lp" in the [Name of printer or print queue on that server] box, and then click [OK].
 The port is added.
- 14. Check that the port of the selected printer is displayed in [Port].
- 15. Configure the default printer as necessary.
- 16. Click [Continue].

The printer driver installation starts.

17. Click [Finish].

1

18. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].

Restart the computer to complete installation.



- To stop installation of the selected driver, click [Cancel] before installation is complete.
- Auto Run may not work with certain operating system settings. In that case, launch "Setup.exe" on the CD-ROM root directory.
- A message appears if there is a newer version of the printer driver already installed. If there is, you
 cannot install the printer driver using Auto Run. If you still want to install the printer driver, use [Add
 Printer]. See "Messages Displayed When Installing the Printer Driver", Troubleshooting.

Using the WSD Port

This describes how to install the PCL printer driver using the WSD port.

Mportant !

- The WSD port can be used under Windows Vista or Windows Server 2008.
- Manage Printers permission is required to install the driver. Log on as an Administrators group member.
- You can connect to the printer only if both the printer and computer are on the same network segment, or "Network discovery" is enabled. For details, see Windows Help.

Installing the PCL printer driver

- 1. Quit all applications currently running.
- 2. On the [Start] menu, click [Network].

The [Network] window appears, and the device search begins automatically.

3. Right-click the machine's icon, and then click [Install].

If the [User Account Control] dialog box appears, click [Continue].

The [Found New Hardware] dialog box appears.

4. Click [Locate and install driver software (recommended)].

If the [User Account Control] dialog box appears, click [Continue].

- 5. Click [Don't search online].
- 6. Click [Browse my computer for driver software (advanced)].
- Insert the provided CD-ROM into the computer's CD-ROM drive.

If the [AutoPlay] dialog box appears, click the [close] button and then proceed to step 8.

8. Click [Browse...], and then specify a location for the printer driver.

If the CD-ROM drive letter is D, the printer driver's source files are stored in "D:\DRIVERS\PCL5C\XP_VISTA\(Language)\DISK1" or "D:\DRIVERS\PCL6\XP_VISTA\MUI\DISK1".

The PCL 6 printer driver is installed in the language specified by your operating system.

9. Click [Next].

If the [Windows can't verify the publisher of this driver software] message appears, click [Install this driver software anyway].

10. Click [Close].

If installation is successful, the icon of the printer connected to the "WSD" port is added to the [Printers] window.



- The port name that follows "WSD" uses random character strings. It cannot be changed freely.
- To stop installation of the selected driver, click [Cancel] before the installation is complete. When reinstalling the WSD Port, right-click the machine's icon in the [Network] window, and then click
 [Uninstall].

Using the SmartDeviceMonitor for Client Port

This describes how to install the printer driver using the SmartDeviceMonitor for Client port.

To use this function, you must first download SmartDeviceMonitor for Client from the supplier's Web site and install it on your computer. Contact your local dealer for information on downloading SmartDeviceMonitor for Client.



Manage Printers permission is required to install the driver. Log on as an Administrators group member.

Installing the PCL printer driver (TCP/IP)

- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [PCL Printer Driver].
- 5. The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next >].

1

6. Select the printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 7. Click [Next >].
- 8. Select the machine model you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

9. Double-click the machine name to display the printer settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 10. Click [Port], and then click [Add].
- 11. Click [SmartDeviceMonitor], and then click [OK].
- 12. Click [TCP/IP], and then click [Search].

A list of printers using TCP/IP appears.

13. Select the machine you want to use, and then click [OK].

Only machines that respond to a broadcast from the computer appear. To use a machine not listed here, click [Specify Address], and then enter the IP address or host name of the machine.

- 14. Check that the port of the selected printer is displayed in [Port].
- 15. Set a user code, if necessary.

Up to 8 numeric characters can be entered. No alphabetic characters or symbols can be entered.

- 16. Select the [Default Printer] check box to configure the printer as default.
- 17. Click [Continue].

Installation starts.

- 18. Click [Finish].
- 19. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].



- Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.
- A message appears if there is a newer version of the printer driver already installed. If there is, you
 cannot install the printer driver using Auto Run. If you still want to install the printer driver, use [Add
 Printer]. See "Messages Displayed When Installing the Printer Driver", Troubleshooting.

Installing the PCL printer driver (IPP)

1. Quit all applications currently running.

2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [PCL Printer Driver].
- 5. The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next >].

6. Select a printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 7. Click [Next>].
- 8. Select the machine model you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

9. Double-click the machine name to display the printer settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 10. Click [Port], and then click [Add].
- 11. Click [SmartDeviceMonitor], and then click [OK].
- 12. Click [IPP].
- In the [Printer URL] box, enter "http:// machine's IP address/printer" as the machine's address.

If the server authentication is issued, enter "https:// machine's IP address/printer" to enable SSL (a protocol for encrypted communication). Internet Explorer 5.0.1, or higher version must be installed to use SSL (example IP address: 192.168.15.16)

http://192.168.15.16/printer

https://192.168.15.16/printer

You can enter "http:// machine's IP address/ipp" as the machine's address.

14. Enter a name for identifying the printer in [IPP Port Name]. Use a name different from the one of any existing ports.

If a name is not specified here, the address entered in the [Printer URL] box becomes the IPP port name.

15. Click [Detailed Settings] to make necessary settings, and then click [OK].

For details about the settings, see SmartDeviceMonitor for Client Help.

- 16. Click [OK].
- 17. Check that the port of the selected printer is displayed in [Port].

1

18. Set a user code, if necessary.

Up to 8 numeric characters can be entered. No alphabetic characters or symbols can be entered.

- 19. Select the [Default Printer] check box to configure the printer as default.
- 20. Click [Continue].

Installation starts.

- 21. Click [Finish].
- 22. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].

Restart the computer to complete installation.



- To stop installation of the selected driver, click [Cancel] before installation is complete.
- Auto Run may not work with certain operating system settings. In that case, launch "Setup.exe" on the CD-ROM root directory.
- Setting a user code allows a SmartDeviceMonitor for Admin user to display and check the number of sheets each user prints. For details, see SmartDeviceMonitor for Admin Help.
- A message appears if there is a newer version of the printer driver already installed. If there is, you
 cannot install the printer driver using Auto Run. If you still want to install the printer driver, use [Add
 Printer]. See "Messages Displayed When Installing the Printer Driver", Troubleshooting.

Changing the port settings for SmartDeviceMonitor for Client

Follow the procedure below to change the SmartDeviceMonitor for Client settings, such as TCP/IP timeout, recovery/parallel printing, and printer groups.

Windows 2000:

- 1. On the [Start] menu, point to [Settings], and then click [Printers].
 - The [Printers] window appears.
- 2. Click the icon of the printer you want to use. On the [File] menu, click [Properties].
- 3. On the [Ports] tab, click [Configure Port...].

The [Configuration] dialog box appears.

Windows XP, Windows Server 2003/2003 R2:

- 1. On the [Start] menu, click [Printers and Faxes].
 - The [Printers and Faxes] window appears.
- 2. Click the icon of the printer you want to use. On the [File] menu, click [Properties].

3. Click the [Ports] tab, and then click [Configure Port...].

The [Port Configuration] dialog box appears.

Windows Vista, Windows Server 2008:

1. On the [Start] menu, click [Control Panel].

The [Control Panel] window appears.

2. Click [Printer].

The [Printers] window appears.

- 3. Right-click the icon of the printer you want to use, and then click [Properties].
- 4. Click the [Ports] tab, and then click [Configure Port].

The [Port Configuration:] dialog box appears.

U Note

- For TCP/IP, timeout setting can be configured.
- User, proxy, and timeout settings can be configured for IPP.
- If no settings on the [Recovery/Parallel Printing] tab are available, follow the procedure below.
 - 1. Click [Cancel] to close the [Port Configuration:] dialog box.
 - 2. Start SmartDeviceMonitor for Client, and then right-click the SmartDeviceMonitor for Client icon on the task tray.
 - 3. Point to [Properties], and then click [Extended Features Settings].
 - 4. Select the [Set Recovery/Parallel Printing for each port] check box.
 - 5. Click [OK] to close the [Extended Features Settings] dialog box.
- For details about these settings, see "Using the SmartDeviceMonitor for Client Port", or SmartDeviceMonitor for Client Help.

Reference

• p.25 "Using the SmartDeviceMonitor for Client Port"

1

Using as a Windows Network Printer

This describes how to install the PCL printer driver when using the printer as a Windows network printer.

To use the print server, install the printer driver by selecting "Network printer server", and then select the Windows 2000/XP/Vista, or Windows Server 2003/2003 R2/2008 shared printer.

This section assumes that the client computer has already been configured to communicate with a Windows 2000/XP/Vista, or Windows Server 2003/2003 R2/2008 print server. Do not begin the following procedure before the client computer is set up and configured correctly.

Mportant (

- Manage Printers permission is required to install the drivers. Log on as an Administrators group member.
- If you print with a print server connected to the machine using the SmartDeviceMonitor for Client port,
 Recovery Printing and Parallel Printing cannot be used from the client computer.
- If you print under Windows XP/Vista or Windows Server 2003/2003 R2/2008 print server, notification functions of SmartDeviceMonitor for Client may not be used with the client computer.
- You can install the printer driver from the CD-ROM provided with this printer or download it from the supplier's Web site.
- If your operating system is Windows XP Pro x64, Windows Vista x64, Windows Server 2003 x64/2003 R2 x64/2008 x64, you must download the printer driver from the manufacturer's Web site. Select this machine and the operating system you are using, and then download it.

Installing the PCL Printer Driver

- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [PCL Printer Driver].
- The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next >].

6. Select the printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 7. Click [Next>].
- 8. Select the [Printer Name] check box to select the machine models you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

9. Double-click the machine name to display the machine settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 10. Click [Port], and then click [Add].
- 11. Click [Network Printer], and then click [OK].
- 12. Double-click the computer name you want to use as a print server in the [Browse for Printer] window.
- 13. Select the printer you want to use, and then click [OK].
- 14. Check that the port of the selected printer is displayed in [Port].
- 15. Configure the user code as necessary.

For details about user code, see the printer driver Help.

- 16. Select the [Default Printer] check box to configure the printer as default.
- 17. Click [Continue].

The printer driver installation starts.

18. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].

Restart the computer to complete installation.



- A user code can be set after the printer driver installation. For information about user code, see the
 printer driver Help.
- To stop installation of the selected drivers, click [Cancel] before installation is complete.
- Auto Run may not work with certain operating system settings. In that case, launch "Setup.exe" on the CD-ROM root directory.
- A message appears if there is a newer version of the printer driver already installed. If there is, you cannot install the printer driver using Auto Run.
- If you still want to install the printer driver, use [Add Printer]. See "Messages Displayed When Installing the Printer Driver", Troubleshooting.

Using as a NetWare Print Server/Remote Printer

This describes how to set up the Windows computer used as the NetWare client.

Mportant !

- Under Windows 2000/XP, and Windows Server 2003/2003 R2, Manage Printers permission is required to install the drivers. Log on as an Administrators group member.
- IPX/SPX (NetWare) cannot be used under Windows Vista and Windows Server 2008.
- In an IPv6 environment, NetWare servers cannot be used.

The following explanation assumes NetWare Client is installed on the client computer and the NetWare server environment is correctly set up. Install all necessary client applications before following this procedure.

Set up the printer driver while logging on to the NetWare file server.

The following values are used in the example:

- NetWare version: 4.1
- File server name: CAREE
- Queue name: R-QUEUE
- 1. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 2. Select an interface language, and then click [OK].
- 3. Click [PCL Printer Driver].
- 4. The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next>].

5. Select the printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 6. Click [Next>].
- 7. Select the [Printer Name] check box to select the machine model you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

8. Double-click the machine name to display the printer settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 9. Click [Port], and then click [Add].
- 10. Click [Network Printer], and then click [OK].

11. Double-click the name of the NetWare file server on the network tree.

The created queue is displayed.

- 12. Select the print queue, and then click [OK].
- 13. Check that the port of the selected printer is displayed in [Port].
- 14. Click [Continue].

The printer driver installation starts.

- 15. Click [Finish] in the [Select Program] dialog box.
- 16. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].

Restart the computer to complete installation.

17. After restarting the computer, open the printer properties from the [Printers and Faxes] window.

Under Windows 2000 or Windows Server 2003/2003 R2, launch the [Printers] window, and then open the printer properties.

18. Click the [NetWare setting] tab.

Under Windows Server 2003/2003 R2, on the [Printer Settings] tab, clear the [Form Feed] and [Enable Banner] check boxes.

Do not select these check boxes since they are automatically selected by the printer driver. If you select the check boxes, the printer may not print correctly.

19. Click [OK] to close the printer properties dialog box.



- Auto Run may not work with certain operating system settings. In that case, launch "Setup.exe" on the CD-ROM root directory.
- To stop installation of the selected drivers, click [Cancel] before installation is complete.
- The protocol is set to inactive as default. Enable the protocol on the control panel, using Web Image Monitor or using telnet.

Form Feed

Do not use NetWare to configure form feed. Form feed is controlled by the printer driver on Windows. If NetWare form feed is configured, the printer may not print properly.

Under Windows 2000/XP or Windows Server 2003/2003 R2, follow the procedure below to disable form feed according to the operating system used:

Clear the [Form feed] check box on the [NetWare Settings] tab in the printer properties dialog box.

Banner Page

Do not use NetWare to configure banner page.

Under Windows 2000/XP or Windows Server 2003/2003 R2, follow the procedure below to disable banner page according to the operating system used:

Clear the [Enable banner] check box on the [NetWare Settings] tab in the printer properties dialog box.

Printing after Resetting the Printer

Printer to print server connection requires 30 - 40 seconds to resume after the printer is reset. During this period, jobs may be accepted (depending on NetWare specifications) but not printed.

To print after resetting the printer as the remote printer, check on the print server that the remote printer is disconnected, or wait for two minutes before trying to print.

1

Installing the Printer Driver Using USB

This section explains how to install the PCL printer drivers using USB.

Before installing, check that only the operating system is running on the computer and no print jobs are in progress.

Windows 2000 - USB

Mportant !

 Manage Printers permission is required to install the drivers. Log on as an Administrators group member.

If the printer driver has already been installed, and plug and play is enabled, the icon of the machine connected to the "USB" port is added to the [Printers] window.

If the printer driver is not installed, follow the plug-and-play instructions of the machine to install it from the CD-ROM provided with this machine.

- 1. Check that the power of the machine is off.
- 2. Connect the machine and computer using the USB cable.

Connect the USB cable firmly.

3. Turn on the power of the machine.

Found New Hardware Wizard starts, and USB Printing Support is installed automatically.

- 4. Click [Next>].
- In the Found New Hardware Wizard window, click [Search for a suitable driver for my device [recommended]], and then click [Next >].
- 6. Select the [Specify a location] check box, and then click [Next >].
- 7. Insert the CD-ROM in the CD-ROM drive.

If Auto Run starts, click [Cancel] and then [Exit].

8. Specify the location where the source files of the printer driver is stored.

If the CD-ROM drive is D, the source files of the printer driver are stored in the following locations:

- PCL 5c
 - D:\DRIVERS\PCL5C\XP_VISTA\(Language)\DISK1
- PCL 6

D:\DRIVERS\PCL6\XP_VISTA\MUI\DISK1

The PCL 6 printer driver is installed in the language specified by your operating system.

9. Check the printer driver location, and then click [OK].

1

- 10. Click [Next>].
- 11. Click [Finish].

If the installation is successful, the icon of the machine connected to the "USB001" port is added to the [Printers] window.



- To disable Auto Run, press the left Shift key when inserting the CD-ROM into the drive and keep it
 pressed until the computer finishes reading from the CD-ROM.
- The number after "USB" varies depending on the number of printers connected.

Windows XP, Windows Server 2003/2003 R2 - USB

 Manage Printers permission is required to install the drivers. Log on as an Administrators group member.

If the printer driver has already been installed, and plug and play is enabled, the icon of the machine connected to the "USB" port is added to the [Printers and Faxes] window.

If the printer driver is not installed, follow the plug-and-play instructions of the machine to install it from the CD-ROM provided with this machine.

- 1. Check that the power of the machine is off.
- 2. Connect the machine and computer using the USB cable.

Connect the USB cable firmly.

3. Turn on the power of the machine.

Found New Hardware Wizard starts, and USB Printing Support is installed automatically.

- 4. In the Found New Hardware Wizard window, click [Install from a list or specific location [Advanced]], and then click [Next >].
- Insert the CD-ROM in the CD-ROM drive.

If Auto Run starts, click [Cancel] and then [Exit].

- 6. Select the [Include this location in the search] check box under [Search for the best driver in these locations], and then click [Browse].
- 7. Specify the location where the source files of the printer driver is stored, and then click [OK].

If the CD-ROM drive is D, the source files of the printer driver are stored in the following locations:

PCL 5c

D:\DRIVERS\PCL5C\XP_VISTA\(Language)\DISK1

PCL 6

D:\DRIVERS\PCL6\XP_VISTA\MUI\DISK1

1

- 8. Click [Next>].
- 9. Click [Finish].

If the installation is successful, the icon of the machine connected to the "USB001" port is added to the [Printers and Faxes] window.



- To disable Auto Run, press the left Shift key when inserting the CD-ROM into the drive and keep it
 pressed until the computer finishes reading from the CD-ROM.
- The number after "USB" varies depending on the number of printers connected.

Windows Vista, Windows Server 2008 - USB

 Manage Printers permission is required to install the drivers. Log on as an Administrators group member.

If the printer driver has already been installed, and plug and play is enabled, the icon of the machine connected to the "USB" port is added to the [Printers] window.

The printer drivers can be installed from the CD-ROM provided with this machine.

If the printer driver is not installed, follow the plug-and-play instructions of the machine to install it from the CD-ROM provided with this machine.

- 1. Check that the power of the machine is off.
- 2. Connect the machine and computer using a USB cable.

Connect the USB cable firmly.

3. Turn on the power of the machine.

Found New Hardware Wizard starts, and USB Printing Support is installed automatically.

4. In the Found New Hardware Wizard window, click [Locate and install driver software (recommended)], and then click [Next >].

Click [Continue] if the [User Account Control] window appears.

5. Insert the CD-ROM into the CD-ROM drive.

If Auto Run starts, click [Cancel], and then [Exit].

Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

If the [Windows can't verify the publisher of this driver software] message appears, click [Install this driver software anyway].

7. Click [Close].

If the installation is successful, the icon of the machine connected to the "USB001" port is added to the [Printers] window.

U Note

- To disable Auto Run, press the left Shift key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.
- The number after "USB" varies depending on the number of printers connected.

Printing with Parallel Connection

This section describes how to install the PCL printer drivers when using the parallel port.

To use a printer connected using a parallel interface, click [LPT1] when installing the printer driver.

Mportant (

- Manage Printers permission is required to install the drivers. Log on as an Administrators group member.
- If your operating system is Windows XP Pro x64, Windows Vista x64, or Windows Server 2003 x64/2003 R2 x64/2008 x64, you must download the printer driver from the manufacturer's Web site. Select this machine and the operating system you are using, and then download it.

Installing the PCL printer driver:

- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [PCL Printer Driver].
- 5. The software license agreement appears in the [License Agreement] dialog box.

After reading the agreement, click [I accept the agreement.], and then click [Next >].

6. Select the printer driver you want to use in the [Select Program] dialog box.

You can select several printer drivers.

The PCL 6 printer driver is installed in the language specified by your operating system.

- 7. Click [Next>].
- 8. Select the [Printer Name] check box to select the machine model you want to use.

The machine name can be changed in the [Change settings for 'Printer Name'] box.

9. Double-click the machine name to display the printer settings.

The details shown in [Comment], [Driver], and [Port] vary depending on the operating system, machine model, and port.

- 10. Check that [LPT1:] is shown in [Port].
- 11. Select the [Default Printer] check box to configure the printer as default.
- 12. Click [Continue].

The printer driver installation starts.

13. After the installation is completed, select one of the options to restart the computer either now or later, and then click [Finish].

Restart the computer to complete installation.

1

U Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.
- To stop installation of the selected software, click [Cancel] before installation is complete.
- Auto Run may not work with certain operating system settings. In that case, launch "Setup.exe" on the CD-ROM root directory.
- A message appears if there is a newer version of the printer driver already installed. If there is, you cannot install the printer driver using Auto Run. If you still want to install the printer driver, use [Add Printer]. See "Messages Displayed When Installing the Printer Driver", Troubleshooting.

Making Option Settings for the Printer

When bidirectional communication works correctly, your computer obtains information about option, paper size and paper feed direction settings from the machine automatically. Bidirectional communication also allows you to monitor machine status.

When bidirectional communication is disabled, you have to set up option, paper size and paper feed direction settings on your computer manually.

Conditions for Bidirectional Communication

To support bidirectional communication, the following conditions must be met:

When connected with parallel cables

- The computer must support bidirectional communication.
- The machine must support bidirectional communication.
- The interface cable must support bidirectional communication.
- The machine must be connected to the computer using the standard parallel cables and parallel connectors.
- Under Windows 2000, [Enable bidirectional support] must be selected, and [Enable printer pooling] must not be selected on the [Ports] tab with the printer driver.

When connected with the network

- The machine must support bidirectional communication.
- The Standard TCP/IP port must be used.
- [Enable bidirectional support] must be selected, and [Enable printer pooling] must not be selected on the [Ports] tab with the printer driver.
- In addition to the above, one of the following conditions must also be met:
 - The TCP/IP protocol must be used.
 - IPP port name must include the IP address when using the IPP protocol.

When connected with USB

- The machine must be connected to the computer's USB port using the USB interface cable.
- The computer must support bidirectional communication.



- The PCL 6 printer driver supports bidirectional communication and updates the machine status automatically.
- The PCL 5c printer driver supports bidirectional communication. You can update the machine status manually.

If Bidirectional Communication Is Disabled

This section describes how to set up option, paper size and paper feed direction settings on your computer manually.



- Manage Printers permission is required to change the printer properties in the [Printers] folder. Log
 on as an Administrators group member.
- 1. On the [Start] menu, click [Printers and Faxes].

When using Windows 2000, point to [Settings] on the [Start] menu, and then click [Printers]. The [Printers] window appears.

When using Windows Vista or Windows Server 2008, click [Control Panel] on the [start] menu, and then click [Printer]. The [Printers] window appears.

- 2. Click the icon of the printer you want to use.
- 3. On the [File] menu, click [Properties].

When using Windows Vista or Windows Server 2008, right-click the icon of the printer you want to use, and then click the [Properties].

4. Click the [Accessories] tab.

If options in the [Accessories] tab are disabled, bidirectional connection is enabled. In this case, no change is necessary for option settings.

- 5. Select options installed from the [Options] area, and then make the necessary settings.
- 6. In [Input Tray:] select which trays to use, and then, in [Paper Size:] select the size of the paper that you want to load in each tray.

Click [Update] in the [Input Tray Settings] area to apply the setting for each tray.

7. Click [OK] to close the printer properties dialog box.

Installing Font Manager

Mportant (

- Manage Printers permission is required to install Font Manager. Log on as an Administrators group member.
- 1. Quit all applications currently running.
- 2. Insert the CD-ROM into the CD-ROM drive.

The installer starts.

- 3. Select an interface language, and then click [OK].
- 4. Click [Font Manager].
- 5. Follow the instructions on the display.

1

Using Adobe PageMaker Version 6.0, 6.5, or 7.0

Under Windows 2000/XP with Adobe PageMaker, you need to copy PPD files to the PageMaker folder.

PPD files have the .ppd extension in the folder "DRIVERS \ PS \ XP_VISTA \ (Language) \ DISK1" on the CD-ROM provided with this machine.

The "XP_VISTA" folder inside the "PS" folder is for Windows 2000/XP, Windows Server 2003/2003 R2/2008. Use the folder that is appropriate for the operating system you are currently using.

The third folder "(Language)" may be substituted by an appropriate language name.

Copy the .ppd file to the PageMaker folder.

• For PageMaker 6.0 default installation

The directory is "C:\PM6\RSRC\PPD4".

• For PageMaker 6.5 default installation

The directory is "C: \PM65 \RSRC \USENGLISH \PPD4".

The "USENGLISH" may vary depending on your language selection.

• For PageMaker 7.0 default installation

The directory is "C:\PM7\RSRC\USENGLISH\PPD4".

The "USENGLISH" may vary depending on your language selection.



- If the driver is not set correctly after copying the ".ppd" file, printing may not be performed properly.
- When using PageMaker, the optional features that can be selected by the printer driver will not be
 active. The following procedure describes how to activate the optional printer features.
 - On the [File] menu, click [Print].
 The [Print Document] dialog box appears.
 - 2. Make the necessary settings in the [Features] box.

2. Printing Documents

This chapter explains how to print documents using the printer driver. It also describes advanced printing functions such as staple, punch and fold.

Displaying the Printer Driver Settings Screen

This section explains how to open and configure the printer driver properties.

The following procedure explains how to configure the printer driver under Windows XP. If you are using another operating system, the procedure might vary slightly.

Making Printer Default Settings - the Printer Properties

This section explains how to open the printer driver properties from [Printers and Faxes].

Mportant (

- Manage Printers permission is required to change the printer settings. Log on as an Administrators group member.
- You cannot change the machine default settings for individual users. Settings made in the [Printer Properties] dialog box are applied to all users.
- On the [Start] menu, click [Printers and Faxes].
 The [Printers and Faxes] window appears.
- 2. Click the icon of the printer you want to use.
- On the [File] menu, click [Properties].
 The [Printer Properties] dialog box appears.
- Make the settings you require, and then click [OK].



- · Depending on the applications, the settings you make here may not be used as the default settings.
- For details, see the printer driver Help.

Making Printer Default Settings - Printing Preferences

This section explains how to open the [Printing Preferences] dialog box from [Printers and Faxes].



• When the printer driver is distributed from the print server, the setting values specified by the server are displayed as the default for [Printing Defaults...].

1. On the [Start] menu, click [Printers and Faxes].

The [Printers and Faxes] window appears.

- 2. Click the icon of the printer you want to use.
- 3. On the [File] menu, click [Printing Preferences...].

The [Printing Preferences] dialog box appears.

4. Make the settings you require, and then click [OK].

The setting is temporarily registered as [Unregistered] in the [One Click Preset List:] area.

U Note

- · Depending on the applications, the settings you make here may not be used as the default settings.
- The [Unregistered] setting is invalid if the other [One Click Presets] icon is selected. If you wish to
 confirm the [Unregistered] setting, click [Register Current Settings...]. For details about confirming the
 setting, see "Making Printer Settings One Click Presets".
- For details, see the printer driver Help.

Reference

p.47 "Making Printer Settings - One Click Presets"

Making Printer Settings from an Application

You can make printer settings for a specific application.

To make printer settings for a specific application, open the [Printing Preferences] dialog box from that application. The following procedure explains how to make printer settings for a specific application using Windows XP WordPad as an example.

1. On the [File] menu, click [Print...].

The [Print] dialog box appears.

- 2. In the [Select Printer] list, select the printer you want to use.
- 3. Click [Preferences].

The [Printing Preferences] dialog box appears.

4. Make the settings you require, and then click [OK].

U Note

- Procedures for opening the [Printing Preferences] dialog box vary depending on the application. For
 details, see the manuals provided with the application.
- Depending on the applications, the printer default settings may not be applied.
- The printer settings you configure in the current application before printing might not be saved as the
 default settings.

- General users can change the properties displayed in the [Print] dialog box of an application. Settings
 made here are used as the defaults when printing from the application.
- For details, see the printer driver Help.

Making Printer Settings - One Click Presets

This section explains how to register and use one click presets.

Each function explained in this chapter is preconfigured and registered under [One Click Preset List:] on the [One Click Presets] tab.

You can apply the relevant setting simply by clicking on the one click preset name. This helps to avoid incorrect settings and misprints.

One click presets can be added, modified, and deleted as required. By using registered one click presets, users without in-depth knowledge of the printer driver can utilize advanced printing functions easily.

Follow the procedure to register one click presets.

- 1. In the application, on the [File] menu, click [Print].
 - The [Print] dialog box appears.
- Select the machine, and then open the [Printing Preferences] dialog box in the document's native application.

The [Printing Preferences] dialog box appears.

- 3. Make the settings you require.
- Click [Register Current Settings...]. Enter a name and comment that describe the setting, and then click [OK].

The newly registered icon appears with its registered name in the [One Click Preset List:] area.

5. Click [OK].




- Under Windows operating systems, this function is available through the PCL 6 and PostScript 3 printer driver. When using this function using the PostScript 3 printer driver, see PostScript 3 Supplement.
- For details about modifying and deleting one click presets, see the printer driver Help.

Setting Paper on the Bypass Tray

You can load paper which does not support in the paper trays. Additionally, you can print on paper such as thick paper, OHP transparency, and label paper by using the bypass tray.



- Paper sizes that can be loaded onto the bypass tray can be 100.0 to 305.0 mm (3.94 to 12.00 in.) vertically, and 148.0 to 457.2 mm (5.83 to 18.00 in.) horizontally.
- When prints are delivered to the finisher shift tray of Finisher SR5000, an available paper size can be 139.0 to 305.0 mm (5.48 to 12.00 in.) vertically.
- The machine can automatically detect the following sizes as regular size copy paper:
 - 220-240V : A3□. A4□. A5□. 8 " × 13 "□
 - $\boxed{110-127V}/\boxed{208-240V}$: A3 \Box , 11 "× 17" \Box , 81/2" × 14" \Box , 51/2" × 81/2" \Box
- If you want to use the size of paper other than the above, be sure to specify the size.
- The following functions are disabled when printing from the bypass tray:
 - Duplex/Booklet printing
 - Auto Tray Select
 - Extended Auto Tray Switching
 - Rotating Collate
 - Staple (when an optional finisher is installed)
 - Punch (when an optional finisher and punch unit are installed)
 - Fold (when an optional Finisher SR5000 or Finisher SR4040, and Multi-Folding Unit is installed)
 - Ring Binding (when an optional Ring Binder installed)
- Certain types of OHP transparencies for color printing cannot be used. For details about types that
 can be used, contact your sales or service representative.
- 1. Open the bypass tray.



BVJ015


2. Gently insert paper with the print side up into the bypass tray until the beeper sounds, and then adjust the paper guides to the paper size.

If the paper size of the paper guide and the paper do not match, skewing and misfeeds might occur.

Do not stack paper over the limit mark, otherwise a skewed image or misfeeds might occur.

Open out the extender to support paper sizes larger than A4D, $8^{1}/_{2}$ " × 11 "D.

Fan the paper to get air between the sheets to avoid a multi-sheet feed.



- 1. Extender
- 2. Paper Guide
- 3. Set the paper size using the printer driver or the control panel.




- When loading thick paper, thin paper or OHP transparencies, set paper size and paper type.
- The number of sheets that can be loaded in the bypass tray depends on the paper type.
- When loading letterhead paper, see "Loading Paper", About This Machine.
- Depending on the environment where the machine is being used, you might at times hear a rustling noise from paper moving through the machine. This noise does not indicate a malfunction.
- When [Panel Key Sound] is turned off, it will not sound if you insert paper into the bypass tray. For
 details about [Panel Key Sound], see "System Settings", Network and System Settings Reference.
- The bypass tray is not usable when Wide LCT is installed. For details about setting paper on the Wide LCT, see "Loading Paper", About This Machine.
- For details about setting printer drivers, see the printer driver Help.

Setting the Paper Size Using the Control Panel

Follow the procedure below to set the machine using the control panel when loading standard size paper onto the bypass tray.




- The following procedures are not required if you select [Driver / Command] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features]. In that case, set the paper size using the printer driver. For details about [System] settings, see "System".
- 1. Press the [User Tools/Counter] key on the control panel.



2. Press [System Settings].



- 3. Press the [Tray Paper Settings] tab.
- 4. Press [Printer Bypass Paper Size].



5. Select the paper size.



- 6. Press [OK].
- 7. Press the [User Tools/Counter] key.

The initial screen appears.



- When loading thick paper, thin paper or OHP transparencies, set paper size and paper type.
- [Auto Detect] is the default setting for [Printer Bypass Paper Size].
- For details about setting printer drivers, see the printer driver Help.

■ Reference

• p.153 "System"


Setting Custom Size Paper Using the Control Panel

Follow the procedure below to set the machine using the control panel when loading custom size paper onto the bypass tray.

Mportant (

- The following procedures are not required if you select [Driver / Command] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features]. In that case, set the paper size using the printer driver. For details about [System] settings, see "System".
- If you select [Machine Settings] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features], the settings made using the control panel have priority over the printer driver settings. For details about [System] settings, see "System".

1. Press the [User Tools/Counter] key on the control panel.



- 2. Press [System Settings].
- 3. Press the [Tray Paper Settings] tab.
- 4. Press [Printer Bypass Paper Size].
- 5. Press [Custom Size].



If a custom size is already set, press [Change Size].

6. Press [Vertical], enter the vertical size of the paper using the number keys, and then press the [#] key.



- 7. Press [Horizontal], enter the horizontal size of the paper using the number keys, and then press the [#] key.
- 8. Press [OK].

The paper sizes entered are displayed.

9. Press [OK].

2

10. Press the [User Tools/Counter] key.

The initial screen appears.



- When loading thick paper, thin paper or OHP transparencies, set paper size and paper type.
- [Auto Detect] is the default setting for [Printer Bypass Paper Size].
- For details about setting printer drivers, see the printer driver Help.

Reference


• p.153 "System"

Setting Thick Paper, Thin Paper or OHP Transparencies Using the Control Panel

Follow the procedure below to set the machine using the control panel when loading thick paper, thin paper or OHP transparencies onto the bypass tray.




- The following procedures are not required if you select [Driver / Command] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features]. In that case, set the paper size using the printer driver. For details about [System] settings, see "System".
- If you select [Machine Settings] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features], the settings made using the control panel have priority over the printer driver settings. For details about [System] settings, see "System".
- Be sure to remove printed OHP transparencies one by one as they are output. This prevents them sticking together.
- 1. Press the [User Tools/Counter] key on the control panel.



- 2. Press [System Settings].
- 3. Press the [Tray Paper Settings] tab.
- 4. Press [▼Next] to scroll through the list.

5. Press [Paper Type: Bypass Tray].



- 6. Select the proper items, according to the paper type you want to set.
 - Press [OHP (Transparency)] on the [Paper Type] area when loading OHP transparencies.



Press [Do not Display] on the [Paper Type] area, and then press [Thick Paper 1], [Thick Paper 2], [Thick Paper 3], or [Thin Paper] on the [Paper Thickness] area when loading thick paper or thin paper.



7. Press [OK].

The paper type selected is displayed.

8. Press the [User Tools/Counter] key.

The initial screen appears.



Printing on special paper such as thick paper, thin paper or OHP transparencies may be slower than
printing on plain paper.

- The settings made will remain valid until they are reset again. After printing on OHP transparencies, thick paper or thin paper make sure to clear settings for the next user.
- The bypass tray is not usable when the Wide LCT is installed. For details about [Paper Type: LCT], see
 "System Settings", Network and System Settings Reference.
- For details about setting printer drivers, see the printer driver Help.

Reference

• p.153 "System"

Setting Envelopes Using the Control Panel

Follow the procedure below to set the machine using the control panel when loading envelopes onto the bypass tray.


Mportant (

- The following procedures are not required if you select [Driver / Command] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features]. In that case, set the paper size using the printer driver. For details about [System] settings, see "System".
- If you select [Machine Settings] in [Bypass Tray] under [Tray Setting Priority] in [System] of [Printer Features], the settings made using the control panel have priority over the printer driver settings. For details about [System] settings, see "System".
- Only envelopes (1) and (2) as shown below are supported.


Envelope types	Supported/Not supported		
(1)	Supported *1		
(2)	Supported *1		

*1 Misfeeds might also occur when using envelopes (1) and (2) depending on the length and shape of the flaps.

- You can load up to 10 envelopes (80 to 95 g/m², 20 to 24 lb. Bond) in the bypass tray at the same time, without compressing them. Check the envelopes are not damp, and the top of the stack is not higher than the limit mark on the side guide.
- When loading envelopes, be sure to unfold the flaps and position them opposite to the paper feed direction.
- Load envelope type (3) ($162 \times 229 \text{ mm} / C5$) envelopes flap down, flap fold against the side guide.




- Depending on the envelope type, specify an appropriate print image rotation using the printer driver. For envelope types type (1), (2) and (3), rotate by specify 180 degrees.
- Check there is no air in the envelopes before loading.
- To get better print quality, it is recommended that you set the right, left, top, and bottom print margin, to at least 15 mm (0.6 in.) each.
- You cannot print envelopes with duplex function.
- Load only one size and type of envelope at a time.
- Before loading envelopes, flatten leading edges (the side going into the machine) by pressing a pencil
 or ruler across them.
- Before loading envelopes, check they are rectangular in shape.
- Open the bypass tray, and then insert the envelopes with the print side up until the beeper sounds.



BVC007S

2. Press the [User Tools/Counter] key on the control panel.



- 3. Press [System Settings].
- 4. Press the [Tray Paper Settings] tab.
- 5. Press [Printer Bypass Paper Size].
- 6. Press [Custom Size].



If a custom size is already set, press [Change Size].

7. Press [Vertical], enter the vertical size of the paper using the number keys, and then press the [#] key.




- 8. Press [Horizontal], enter the horizontal size of the paper using the number keys, and then press the [#] key.
- 9. Press [OK].

The paper sizes entered are displayed.

10. Press [OK].

- 11. Press [▼Next] to scroll through the list.
- 12. Press [Paper Type: Bypass Tray].



13. Press [Do not Display] on the [Paper Type] area, and then press [Thick Paper 2] on the [Paper Thickness] area.



14. Press [OK].


The paper type selected is displayed.

15. Press the [User Tools/Counter] key.

The initial screen appears.



When entering the horizontal size for envelopes, including the opened-out flap in the measurement.



1. Vertical size

9

- 2. Horizontal size
- For details about envelopes, see "Envelopes", About This Machine.

■ Reference

• p.153 "System"

Printing on Orientation-Fixed or Two-Sided Paper

This section explains how to print on paper whose orientation and printing side are unchangeable (letterhead paper, for example).

Use the settings and paper orientations shown below to ensure the machine prints onto orientation-fixed paper (such as letterhead or continuous stationery) correctly. Specify [Auto Detect] or [On (Always)] for [Letterhead Setting] under [Printer Features], and then place the original and paper as shown below. For details about the letterhead settings, see "System".

Paper Orientation	Paper Trays 1 to 3		Bypass tray/LCT/ Wide LCT	
	Letterhead Setting [On (Always)]	Letterhead Setting [Off]	Letterhead Setting [On (Always)]	Letterhead Setting [Off]
1-sided print	O#A	ABC	ABC	ABC
2-sided print	ABC	ABC	ABC	ABC
1-sided print □			ABC	АВС
2-sided print □			ABC	АВС



- To print on letterhead paper when [Letterhead Setting] is set to [Auto Detect], you must specify [Letterhead] as the paper type in the printer driver's settings.
- If a print job is changed partway through printing from 1-sided to 2-sided printing, 1-sided output after the first copy may print facing a different direction. To ensure all paper is output facing the same

9

direction, specify different input trays for 1-sided and 2-sided printing. Note also that 2-sided printing must be disabled for the tray specified for 1-sided printing.

• For details about how to make 2-sided prints, see "Printing on Both Sides of Sheets".

■ Reference

- p.153 "System"
- p.64 "Printing on Both Sides of Sheets"

Frequently Used Print Methods

This chapter explains how to use the various printing functions including normal printing, duplex printing, and combine printing.

Each function described in this chapter is configured and registered in the [One Click Preset List:] area. You can also change the parameters for each function by modifying "One Click Presets". For details about custom settings, see "Making Printer Settings - One Click Presets".

Reference

• p.47 "Making Printer Settings - One Click Presets"

Standard Printing

Use the following procedure to print documents using the normal printing function with the printer driver.

Important

 Before printing, make sure that the settings for the installed options and loaded paper are correctly configured.

For the PCL 6 printer driver:

 After creating a document, open the [Printing Preferences] dialog box in the document's native application.

The [Printing Preferences] dialog box appears.

- 2. Click the [One Click Presets] tab, if it is not already selected.
- 3. In the [Job Type:] list, select [Normal Print].
- 4. In the [Document Size:] list, select the size of the original to be printed.
- 5. In the [Orientation:] list, select [Portrait] or [Landscape] as the orientation of the original.
- In the [Input Tray:] list, select the paper tray that contains the paper you want to print onto.

If you select [Auto Tray Select] in the [Input Tray:] list, the source tray is automatically selected according to the paper size and type specified.

- 7. In the [Paper Type:] list, select the type of paper that is loaded in the paper tray.
- 8. Select [Color] or [Black and White] in the [Color/ Black and White:] list.
- 9. If you want to print multiple copies, specify a number of sets in the [Copies:] box.

10. To save current setting in the One Click Preset List, select the [Unregistered] icon in [One Click Preset List:], and then click [Register Current Settings...]. Enter a name and comment that describe the setting, and then click [OK].

The newly registered icon appears with its registered name in the [One Click Preset List:] area.

- 11. Click [OK] to close the [Printing Preferences] dialog box.
- 12. Print the document using the print function in the document's native application.

For the PCL 5c printer driver:

1. After creating a document, open the [Printing Preferences] dialog box in the document's native application.

The [Printing Preferences] dialog box appears.

- 2. In the [Job Type:] list, select [Normal Print].
- 3. If you want to print multiple copies, specify a number of sets in the [Copies:] box.
- 4. In the [Orientation:] list, select [Portrait] or [Landscape] as the orientation of the original.
- 5. Select [Color] or [Black and White] in the [Color/ Black and White:] list.
- 6. Click the [Paper] tab.
- 7. In the [Document Size:] list, select the size of the original to be printed.
- 8. In the [Input Tray:] list, select the paper tray that contains the paper you want to print onto.

If you select [Auto Tray Select] in the [Input Tray:] list, the source tray is automatically selected according to the paper size and type specified.

- 9. In the [Paper Type:] list, select the type of paper that is loaded in the paper tray.
- 10. Click [OK] to close the [Printing Preferences] dialog box.
- 11. Print the document using the print function in the document's native application.



- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3
 Supplement.
- The types of paper loaded in the paper trays are indicated on the printer's display. This allows you
 to see which tray the selected paper type is loaded in. However, the paper type setting available in
 the [Printing Preferences] dialog box might be different from the type indicated on the printer's display.
- If the paper tray loaded with the specified paper size and type is not available, a warning message
 appears on the control panel. If this happens, follow the instructions in the message to specify a paper
 tray and make the machine continue printing manually. Alternatively, press the job reset button to
 cancel printing. For details, see "If Error Occurs with the Specified Paper Size and Type".

If [Color] is selected in the [Color/ Black and White:] list, you can print using special color outputs suitable for color vision impaired users. To use this function, click the [Detailed Settings] tab. Click the [Print Quality] menu in the [Menu:] box, and then select [Barrier-free Color Management]. This function is available with the PCL 6 printer driver only.

■ Reference

• p.94 "If Error Occurs with the Specified Paper Size and Type"

Printing on Both Sides of Sheets

This section explains how to print on both sides of each page using the printer driver.

- When performing duplex printing, specify paper other than the following:
 - Thick 2, Thick 3, OHP Transparency, Translucent, Labels, Tab Stock, custom paper size
- The bypass tray does not support duplex printing.

For the PCL 6 printer driver:

 After creating a document, open the [Printing Preferences] dialog box in the document's native application.

The [Printing Preferences] dialog box appears.

2. To use an existing One Click Presets, click the [One Click Presets] tab, and then click the icon in the [One Click Preset List:] box.

If you do not wish to modify a custom setting that is already registered in the printer driver, change settings such as paper size and source tray as required, and then proceed to step 8.

- 3. Click the [Detailed Settings] tab.
- 4. In the [Menu:] box, click the [Edit] icon.
- 5. In the [2 sided:] list, select [Open to Left] or [Open to Top].
- 6. Change any other print settings if necessary.
- 7. To save current setting in the One Click Preset List, select the [Unregistered] icon in [One Click Preset List:], and then lick [Register Current Settings...]. Enter a name and comment that describe the setting, and then click [OK].

The newly registered icon appears with registered name in the [One Click Preset List:] area.

- 8. Click [OK] to close the [Printing Preferences] dialog box.
- 9. Print the document using the print function in the document's native application.

For the PCL 5c printer driver:

- After creating a document, open the [Printing Preferences] dialog box in the document's native application.
 - The [Printing Preferences] dialog box appears.
- 2. In the [Duplex:] list, [Open to Left] or [Open to Top].
- 3. Change any other print settings if necessary.
- 4. Click [OK] to close the [Printing Preferences] dialog box.
- 5. Print the document using the print function in the document's native application.




- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- If the document contains pages with different original sizes, page breaks may occur.

Types of duplex printing


This section explains the binding directions available when using the duplex printing function. When using the duplex printing function, you can select whether to bind copies by edge or in the center.

Edge Binding

· Open to Left



• Open to Top



Combining Multiple Pages into Single Page

This section explains how to print multiple pages onto a single sheet. The combine printing function allows you to economize on paper by printing multiple sheets at reduced size onto a single sheet.



• The combine printing function is not available on a custom size paper. To use the combine printing function, specify a standard size paper.

For the PCL 6 printer driver:

- After creating a document, open the [Printing Preferences] dialog box in the document's native application.
 - The [Printing Preferences] dialog box appears.
- 2. To use an existing One Click Presets, click the [One Click Presets] tab, and then click the icon in the [One Click Preset List:] box.
 - If you do not wish to modify a custom setting that is already registered in the printer driver, change settings such as paper size and source tray as required, and then proceed to step 8.
- 3. Click the [Detailed Settings] tab.
- 4. In the [Menu:] box, click the [Edit] icon.
- 5. In the [Layout:] list, select the combination pattern from the list.
- 6. Change any other print settings if necessary.
- 7. To save current setting in the One Click Preset List, click [Register Current Settings...]. Enter a name and comment that describe the setting, and then click [OK].
 - The newly registered icon appears in the [One Click Preset List:] area.
- 8. Click [OK] to close the [Printing Preferences] dialog box.
- 9. Print the document using the print function in the document's native application.

For the PCL 5c printer driver:

- After creating a document, open the [Printing Preferences] dialog box in the document's native application.
 - The [Printing Preferences] dialog box appears.
- 2. In the [Layout:] list, select the combination pattern from the list.
- 3. Change any other print settings if necessary.
- 4. Click [OK] to close the [Printing Preferences] dialog box.
- 5. Print the document using the print function in the document's native application.




- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- If the document contains pages with different original sizes, page breaks may occur.
- If the application you are using also has a combine function, disable it. If the application's combine function is also enabled when the driver's combine function enabled, incorrect printing is likely.
- For details about combining pages with different orientations and other advanced functions, see the printer driver Help.


Types of combine printing


This section explains the different methods of combine printing that are available. This function allows you to print 2, 4, 9, or 16 pages at reduced size onto a single sheet and to specify a page ordering pattern for the combination.

The following illustrations show example page ordering patterns for 2 and 4 page combinations.


2 Pages per Sheet










4 Pages per Sheet









Advanced Printing

This chapter explains the machine's advanced printing functions.

Other than the functions that can be configured in the [One Click Presets] tab, various print functions can be set up from the [Menu:] icons in the [Detailed Settings] tab. The settings for each function described in this section can be changed by using the following menus.

Menu Names and Brief Overview of Each Function

The following is an overview of the settings that are available using the [Finishing], [Paper], and [Effects] menus in the [Menu:] area.

The PCL 6 printer driver's menus are shown as examples. For details about the PCL 5c printer driver, see the printer driver Help.

Finishing menu

You can enable/disable collate, staple, punch, and fold function.

Collate

When printing multiple sets of documents such as handouts for meetings, you can have prints delivered in batches of ordered sets.

• Staple

With an optional finisher installed, sets can be stapled individually when printing multiple sets.

Punch

With an optional finisher and punch unit installed, holes can be punched into printed outputs.

Fold

With an optional Finisher SR5000 or Finisher SR4040, and an optional Multi-Folding Unit installed, output can be folded.

Ring Binding

With an optional Ring Binder and Finisher SR5000 installed, output can be ring bound or punched.

Paper menu

You can enable/disable the collate function.

• Front Cover sheet/ Back Cover sheet

Using this function, you can insert cover sheet/back cover sheet fed from a different tray to that of the main paper, and print on them.

• Chapter Page

Using this function, you can have specified pages always printed on the same side as the first page, or have chapter slip sheets inserted before specified pages.

• Slip Sheet

A slip sheet can be inserted between each page.

Tab stock printing

Printing on tab stock is possible if the optional tab stock fence is installed.

Effects menu

Watermarks

This function increases a document's security and identifiability by embedding a specified text (watermark) on every page.

Collate

When printing multiple documents such as handouts for meetings, you can separate sets into order. This function is known as "Collate". Collate stores data transmitted from a computer to the machine's memory or hard disk drive.




- You can sort up to 3000 pages, and up to 9999 copies.
- If [Auto Continue] occurs on the first set, Collate will be canceled. For details about [Auto Continue], see "System".
- If you make the machine continue printing manually on the first set, Collate will be canceled. For
 details about making the machine continue printing manually, see "If Error Occurs with the Specified
 Paper Size and Type".
- If the [Ignore Application Collate] check box is cleared, the collate settings in the application's [Print] dialog box are applied.

The followings are the three types of Collate.

Collate


Printed output is assembled as sets in sequential order.



Rotating Collate

Every other print set is rotated by 90 degrees.

When the two paper trays contain the same size paper and same paper type in different orientations, the output result will be always Rotating Collate.




Conditions where Rotate Collate will be canceled

- When combined with the staple function.
- When combined with the punch function.
- When a paper tray is specified.
- When combined with the tab stock function.
- When combined with the chaptering function.
- If custom size paper is set.
- When the output tray has the shift function.
- If jobs containing pages of various sizes are set.
- When combined with the cover sheet or back cover sheet functions.
- When combined with the slip sheet function.
- When combined with the fold function.
- · When combined with ring binding function.

Shift Collate

An optional finisher is required for this function.



The finisher shift tray moves backward or forward when a job or set is output, causing the next to shift, so you can separate them.

Separation Sheet

A separation sheet is inserted between each set.

Separation sheets are fed from the tray specified in the machine's default settings. For details
about the separation sheet tray, see "System Settings", Network and System Settings Reference.

Condition where Separation Sheet will be canceled

• When combined with the staple function.



- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- Folding types other than Z-fold cannot be used with the separation sheet function.
- Ring binding function cannot be used with the separation sheet function.
- When combined with the punch function, the punch function does not apply on separation sheets.
- If both Sample Print and the separation sheet function are enabled, separation sheets will not be inserted in the first copy set.
- If both the cover sheet and separation sheet functions are enabled, a separation sheet will be inserted before the cover sheet.
- Rotating Collate does not apply in separation sheets.
- If both the [Extended Auto Tray Switching] setting and the Rotating Collate function are enabled when paper in the selected tray runs out, the [Extended Auto Tray Switching] setting will be disabled. An error message reporting paper empty will then be displayed.
- When Rotating Collate has been selected, printing speed will be slower than with other collate functions.
- Separation sheets cannot be inserted if "Slip Sheet" is specified.
- If you cannot make Shift Collate even with an optional finisher installed, options may not be set up correctly in the printer driver. To correct the printer driver's option settings, see "Making Option Settings for the Printer".
- For details, see the printer driver Help.

Reference

- p.153 "System"
- p.94 "If Error Occurs with the Specified Paper Size and Type"
- p.41 "Making Option Settings for the Printer"

Staple

With an optional finisher installed, this machine can staple individual sets when printing multiple sets.



- Make option settings for the machine using the printer driver when bidirectional communication is disabled.
- Be sure to set the paper size and paper orientation in the printer driver when using this function.
- The staple function cannot be used if the following paper types are used.

 Plain Paper 2, Middle Thick Paper, Thick 1, Thick 2, Thick 3, Labels, Translucent, OHP Transparency, Tab Stock (81 g/m² or more, 22 lb. Bond)



- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- Depending on the application, print settings may not be enabled and printed output may not be as expected.

Staple position

The specified staple position varies depending on paper size, type, quantity and feed orientation. The following table shows staple positions:

Paper	Original Orientation (Print Data Direction)	Staple Position		
Orientation on the Machine		Finisher SR4030/ Finisher SR5000	Finisher SR4040	
D ₊	R Portrait	R R R R	RRRRR	
	R Landscape	R R R	R R R	
D _t	R Portrait	RRRR	RRRR	
	R Landscape	R R R	R R R D D	

BVC001S



- When center staple is set, the fore edge of prints can be cut using the trimmer. For details about cutting the fore edges of prints, see the printer driver Help.
- Stapling might not be in the specified position if combine (layout) and duplex printing are both selected. After setting the staple position, use the printer driver's preview icon to check the position before printing.
- For printing methods, see the printer driver Help.

Stapling precautions

Paper size and staple capacity

Finisher SR5000

Paper Size	Staple Capacity	
A3D, B4 JISD, 11 × 17D, 8 ¹ / ₂ × 14D, 8 ¹ / ₄ × 14D, 8 ¹ / ₄ × 13D, 8 × 13D, 8 ¹ / ₂ × 13D, 8 × 10DD, 8KD, 11 × 14D	50	
A4 \Box D, B5 JIS \Box D, 8 $^{1}/_{2}$ × 11 \Box D, $7^{1}/_{4}$ × 10 $^{1}/_{2}$ DD, 16K \Box D	100	

Finisher SR4030/Finisher SR4040

Paper Size	Staple Capacity
A3D, B4 JISD, 11 × 17D, 8 ¹ / ₂ × 14D, 8 ¹ / ₄ × 14D, 8 × 13D, 8 ¹ / ₂ × 13D, 8 ¹ / ₄ × 13D, 8KD, 11 × 14D, 12 × 18D	30
A4 \Box C, B5 JIS \Box C, 8×10 \Box C, 8 ¹ / ₂ ×11 \Box C, 7 ¹ / ₄ ×10 ¹ / ₂ \Box C, 16K \Box C	50

Staple capacity for booklet staple

With Finisher SR4040 installed, booklet stapling is available.

Paper Size	Staple Capacity
A3D, A4D, B4 JISD, B5 JISD, 11 × 17D, 8 ¹ / ₂ × 14D, 8 ¹ / ₂ × 11D, 12 × 18D	15

Mixed Size

You can mix two different paper sizes to staple if the width of the paper is the same.

Booklet stapling is unavailable for mixed size paper.

Mixed Paper Size	Staple Capacity for Finisher SR5000	Staple Capacity for Finisher SR4030/ Finisher SR4040	
A3□ and A4□	50	30	
B4 JIS□ and B5 JIS□	50	30	
11 \times 17 \square and 8 $^{1}/_{2} \times$ 11 \square	50	30	

Conditions where stapling will be canceled.

Under the following conditions, collate will continue if it was specified along with the staple function.

- If paper sizes which can not mix together are contained in a single job.
- If the number of pages to staple exceeds the maximum.
- If a paper size that cannot be stapled is selected.
- If a paper type that cannot be stapled is selected.
- When the setting does not meet collating requirements.
- When the record area for collate overflows during the job.
- If positions other than those fixed for stapling are specified.
- If there are inconsistencies between the orientation in duplex mode and the staple position.
- If there are inconsistencies between the orientation in letterhead mode and the staple position.
- When paper is loaded using the bypass tray.
- If the size of the paper after it is Z-folded is not supported for stapling.
- When only 1 page is printed (only when booklet staple is specified with Finisher SR4040).
- If an overflow occurs in the printer language memory space during a job.
- If an event occurs that forces the machine to print an error report.
- If a tray specified as [Driver / Command] under [Tray Setting Priority] is selected.

Note

- When the stapling is canceled, "Staple has been cancelled." appears.
- When staples have run out and [Auto Continue] is off, an error message will be displayed. Cancel the staple function in the error message to continue printing.
- If Staple or Shift Collate is selected with an optional finisher installed, the paper will be output to the finisher shift tray irrespective of the setting.
- When printing on letterhead, stapling may not be at the specified position.
- If you cannot make staple settings even with a finisher installed, options may not be set correctly in the printer driver. To correct the printer driver's option settings, see "Making Option Settings for the Printer".
- When the finisher is being used for another function's job (for example, a copy job), printing will start
 after that job ends.
- Be sure to set paper size and orientation in the printer driver when stapling.
- When duplex printing is selected, adjust staple positions to the binding orientation.
- Depending on the application you are using, print settings may not be stored and the printed result
 may not be as expected.

- When you enable the staple function in the printer driver settings, make sure the [Ignore Application Collate] check box is selected on the [Finishing] menu in the printer driver. If this check box is not selected, more sets than intended might be printed.
- When printing restarts after removing jammed paper, the printing position may be different, depending on the location of the jam.
 - If the paper jam occurred in an optional finisher, printing will restart from the top page of the data currently being printed, or from the page where the paper jam occurred.
 - If the paper jam occurred in the machine, printing will restart from the page where the paper jam occurred.
 - Even if the paper jam occurred in the machine, the error will not be cleared unless the cover of the finisher is opened and closed.
- Folding types other than Z-fold cannot be used with the staple function.
- Ring binding function cannot be used with the staple function.
- For details about optional finishers, see "Appendix", About This Machine.
- To remove paper misfeeds, see "Clearing Misfeeds" Troubleshooting.

Reference

• p.41 "Making Option Settings for the Printer"

Punch

With an optional finisher and punch unit attached, holes can be punched into printed outputs.


- Make option settings for the machine using the printer driver when bidirectional communication is disabled.
- Be sure to set the paper size and paper orientation in the printer driver when using this function.



- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- For details about printing method, see the printer driver Help.

Punch position

The specified punch position varies depending on paper feed and print data orientation. The following table shows punch positions:



BVC045S



- Punch positions will vary slightly from page to page as holes are punched into each sheet individually.
- The number of holes that can be punched varies according to country.
- For details about paper sizes that can be punched, see "Appendix", About This Machine.
- For details about printing methods, see the printer driver Help.

Punching precautions

Follow these precautions when using the punch function.

Conditions where Punch will be canceled

- When a paper type that cannot be punched is selected.
- When a paper size that cannot be punched is selected.
- When paper is loaded using the bypass tray.
- If there are inconsistencies between the orientation in duplex mode and the punch position.
- If there are inconsistencies between the orientation in letterhead mode and the punch position.
- If there are inconsistencies between the staple position and the punch position, when using with staple function.
- When a tray specified as [Driver / Command] under [Tray Setting Priority] is selected.



• When punching is canceled, "Punch has been cancelled." appears.

- When the punch receptacle has become full and [Auto Continue] is off, an error message will be displayed. Cancel the punch function in the error message to continue printing.
- Punching might not be in the specified position when printing on letterhead paper.
- If you cannot make punch settings even with an optional finisher installed, options may not be set
 correctly in the printer driver. To correct the printer driver's option settings, see "Making Option Settings
 for the Printer".
- When duplex print is selected, adjust the punch position to the binding direction.
- Be sure to set the punch position as same as the staple position when using it with the staple function.
- Be sure to set paper size and orientation in the printer driver when punching.
- Depending on the application, print settings may not be enabled and printed output may not be as expected.
- When you enable the punch function in the printer driver settings, make sure the [Ignore Application Collate] check box is selected on the [Finishing] menu in the printer driver. If this check box is not selected, more sets than intended might be printed.
- If a collate option is selected in the application, printing will not be as intended.
- When printing restarts after removing jammed paper, the printing position may be different, depending on the location of the jam.
 - If the paper jam occurred in an optional finisher, printing will restart from the top page of the data currently being printed, or from the page where the paper jam occurred.
 - If the paper jam occurred in the machine, printing will restart from the page where the paper jam occurred.
 - Even if the paper jam occurred in the machine, the error will not be cleared unless the cover of the finisher is opened and closed.
- For details about optional finishers, see "Appendix", About This Machine.
- To remove paper misfeeds, see "Clearing Misfeeds", Troubleshooting.
- Folding types other than Z-fold cannot be used with the staple function.
- Ring binding function cannot be used with the staple function.
- For details about printing methods, see the printer driver Help.

Reference

• p.41 "Making Option Settings for the Printer"

Fold

With an optional Finisher SR5000 or Finisher SR4040, and an optional Multi-Folding Unit attached, output can be folded.



• If you are using Finisher SR4030, you can not use this function.

Folding positions


The following table shows the folds that this machine can apply to prints.

Paper	Original Orientation (Print Data Direction)	Folding Position			
Orientation on the Machine			Print inside	Print outside	Not specified
	Portrait	Z-fold	_	1	
		Half fold			_
		Letter fold-in			_
		Letter fold-out	_	ı	
		Double parallel fold			_
		Gate fold			_
	Landscape	Z-fold	_	1	
		Half fold			_
		Letter fold-in			_
		Letter fold-out	_	_	
		Double parallel fold			_
		Gate fold			_
					BVC014S

For details about which paper sizes are compatible with which fold or multifold, see "Appendix", About This Machine.



• If you apply the Multi-sheet Fold function with letter fold-in to B5 JIS size paper, the folded sheets will be different in size to sheets folded without the Multi-sheet Fold function.



2

- 1. Multi-sheet Fold not applied
- 2. Multi-sheet Fold applied

Notes on the fold function

Follow these precautions when using the fold function.

Conditions where fold function will be canceled

- When a paper type that cannot be folded is selected. *1
- When a paper size that cannot be folded is selected.
- When a combination of paper orientation and fold position that cannot be folded is selected.
- When the machine is made to continue printing manually.
- When fold is specified but the number of sheets exceeds the maximum number available for the fold function.
- If there are inconsistencies between the orientation in duplex mode and the fold position.
- When [Auto Continue] is set.
- When the paper is fed from an optional interposer tray.
- When multifold is specified but the paper sizes are different.
 - *1 The fold function is not supported for Thick 1 to 3, Letterhead, Translucent, OHP Transparency, Cardstock, Labels, and Tab Stock.




- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- To use the Z-fold function, you must set the Z-fold support tray. For details about how to set the Z-fold support tray, see "When Z-folded Paper Is Not Properly Aligned", Troubleshooting.
- Folded copies that are delivered to the Multi-Folding Unit tray may be stacked with their folds open.
 If this happens, the position of the folds is unaffected and the copies will still be output in sequential
 order. Stacked copies can be easily separated in the order they were delivered. To prevent their
 folded sections overlapping, configure the machine to deliver folded copies to the Finisher upper tray
 or Finisher shift tray.
- Remove the Z-fold support tray when delivering copies to the shift tray without using the Z-fold function. If you leave the Z-fold support tray in place, prints are not stacked properly.
- Fold function is disabled when printing using the bypass tray.
- Fold function is disabled when 1200 dpi is selected in [Resolution:] in the printer driver.
- Slip sheets, punch, staple, booklet staple (only when booklet staple is specified with Finisher SR4040), and auto tray switching functions cannot be used when folding.
- When the fold function is used, Rotating Collate will be canceled.

- When stapling Z-folded paper, fewer sheets than normal can be stapled together. This is because a single Z-folded sheet is equivalent to 10 non-Z-folded sheets.
- Depending on the temperate and humidity conditions of the machine's environment and the type of paper being folded, use of the fold function can cause toner smearing, which can occasionally result in spoilt prints.
- Wrinkling can occur when applying letter fold-out to B4 JISD, A3D, 8¹/₂×14D, 11×17D, 12× 18D, 8KD, or larger sheets. In some cases, you may have to use A4D sheets or smaller when applying folds in combination with the reduction function.
- Print quality over fold lines might be reduced. This is due to cracking within the fused toner. Loss of surface along fold lines can also occur with some types of paper. To avoid possible wastage, print a single test sheet before beginning a print run.
- Printing will stop if the number of printed sheets exceeds tray capacity. If this happens, remove printed sheets from the folding unit tray to resume printing.
- Coated paper cannot be used with the Multi-sheet Fold function.
- The Multi-sheet Fold function can fold a maximum of three sheets at a time.

Tab Stock Printing

Printing on tab stock becomes possible if you install the optional tab stock fence. However, only tab stock with the tab on the right (top part of the paper) can be printed on.



You can shift the print area to the right by selecting [Shift Print Position for [Tab Stock]] on the [Paper] menu in the printer driver. The distance of print area shift can be specified in millimeters on the control panel. For details about shifting the position of the print area, see "Tray Paper Settings", Network and System Settings Reference.

Mportant !

- To install an optional tab sheet fence, contact your sales or service representative.
- For details about tab stocks size that can be printed, see "Tray Paper Settings", Network and System Settings Reference.
- If you have selected [Shift Print Position for [Tab Stock]] in the printer driver, you must also select
 [Machine Settings] under [Tray Setting Priority] on the control panel to apply the print area position.



- Be sure to check the position of the tab beforehand, so that images to be printed do not come out slanted. If there are any letters in a position where the tab is not present, toner may dirty the back of the paper.
- If the position of the tab conflicts with the position of staples or punch holes, the tab position will be prioritized.
- When you enable this function, the [Extended Auto Tray Switching] function will be disabled. For
 details about the [Extended Auto Tray Switching] setting, see "System".
- For details about printing method, see the printer driver Help.

Reference

• p.153 "System"

Ring Binding

This section explains how to bind sheets with a ring comb.

Two ring binding options are available for your output:

- Printed sheets are punched and then bound by ring combs
- Printed sheets are punched for ring combs binding but not bound

You can specify the ring binding settings using the display panel or the printer driver.

To specify the settings using the display panel, see "Basic Copying", Copy and Document Server Reference.

- You cannot ring bind or punch on thick paper heavier than 216 g/m² (80 lb. Cover), and following
 paper type.
 - Plain Paper 2, Preprinted, Prepunched, Bond, Cardstock, Translucent, Label
- This machine cannot ring bind sheets that are larger than the following sizes and/or have more than
 the following number of punch holes:
 - 220-240V : A4D/23 holes
 - 110-127V/208-240V: $8^{1}/_{2}$ " \times 11 " $\mathbb{P}/21$ holes
- Only the long side of the paper can be ring bound or punched.
- This machine can ring bind some brands of tab stock paper, but not all.



- This function is available through the PCL 6 and the PostScript 3 printer driver. When using this function
 using the PostScript 3 printer driver, see PostScript 3 Supplement
- When binding sheets with ring combs, make sure the number of printed sheets is between 2 and 100.
 If there is only one sheet, it will be punched for ring comb binding, but not bound.

- If you are using 50-sheet type ring combs, you can bind up to 50 sheets of Plain Paper or 16 sheets
 of Thick Paper (Middle Thick, Thick 1, Thick 2) into a single booklet. If you are using 100-sheet type
 ring combs, you can bind up to 100 sheets of Plain Paper or 33 sheets of Thick Paper (Middle Thick,
 Thick 1, Thick 2) into a single booklet.
- The maximum thickness of a bound booklet is 5.5 mm (for 50-sheet type ring combs) or 11 mm (for 100-sheet type ring combs). If the thickness of the stacked sheets exceeds the maximum during operation, the Ring Binder stops functioning and the sheets remain inside the binder. If this happens, you must remove the sheets from the binder.
- Ring bound booklets are delivered to the ring binder tray. Up to 11 sets (with a 100-sheet type ring comb) can be stacked on the tray.
- Hole punched sheets without binding are delivered to the ring binder tray. Up to 100 sheets (with a 100-sheet type ring comb) can be stacked on the tray.
- To specify the settings using the printer driver, see the printer driver Help.

Ring binding precautions

Conditions where ring binding will be canceled.

- When paper is loaded using the bypass tray.
- When a tray specified as [Driver / Command] under [Tray Setting Priority] is selected.
- When combined with the slip sheet function.
- When combined with the separation sheet function.
- When combined with the fold function.
- When combined with the staple function.
- When combined with the punch function.
- When booklet staple is specified with Finisher SR4040.



When ring binding is enabled, the collate function is automatically enabled also.

Cover Sheet

Using this function, you can insert cover sheet/back cover sheet fed from a different tray to that of the main paper, and print on them.

- To use this function, Collate must be set. Rotating Collate function is disabled.
- If you load cover sheet on an interposer, cover sheet is not printed.


You can print the first page of the document on the sheet for the cover page.

Front Cover sheet

Prints the first page of the document on the sheet for the cover page.

• Print on one side


Prints on one side of the cover sheet only, even when duplex printing is selected.




Print on both sides

Prints on both sides of the cover sheet when duplex printing is selected.

• Cover sheet printed on both sides




• Cover sheet printed on one side




• Blank

• When printing one side



• When printing both sides




Back Cover sheet

Prints the last page of the document as the back cover pages.


• Print on one side

Prints on one side of the cover sheets only, even when duplex printing is selected.

• Back cover page face inside




• Back cover page face outside




• Print on both sides

Prints on both sides of the cover sheets when duplex printing is selected.


• Back cover page face inside, and the number of pages is odd




• Back cover page face outside, and the number of pages is odd



• Back cover page face inside, and the number of pages is even



• Back cover page face outside, and the number of pages is even





- If [Auto Tray Select] is selected in the [Input Tray:] list for the body paper, the paper will be delivered from a tray containing paper in the \square orientation. Therefore, if the cover paper is set to the \square orientation, the orientation of the output cover and body will be different.
- The cover sheet/back cover sheet should be the same size and orientation as the body paper.
- The same paper feed tray can be set for the body of the document and the cover sheet/back cover sheet.
- When loading a cover sheet/back cover sheet in the tray, set the relevant paper size.
- The cover sheet/back cover sheet can not be used when slip sheet is specified.
- · For printing methods, see the printer driver Help.

Chapter Page

The specified page is printed on the same side as the first page, like a book. Also, you can insert chapter slip sheets before specified pages.



• If you load chapter slip sheets on an optional interposer, chapter slip sheets are not printed.


• The same paper feed tray cannot be set for the body of the document and the slip sheet.

You can select one of the following chapter page settings:


- Leave Blank: Inserts a blank sheet before specified pages.
- One Side: Prints on one side of inserted chapter slip sheets.
- Both Sides: Prints on both sides of inserted chapter slip sheets.
- Lead Chapter Page: Always prints a specified page on the same side as the first page.

The following illustrations show the output patterns for Leave Blank, One Side, and Lead Chapter Page.

• Leave Blank




• One Side



If you select Both Sides, both sides of the slip sheets will be printed on.

• Lead Chapter Page



This function is only valid with duplex printing.

If [Auto Tray Select] is selected in the [Input Tray:] list for the body paper, the paper will be delivered from a tray containing paper in the \square orientation. Therefore, when the slip sheet has been set to the \square orientation, the orientation of the output slip sheet and body will be different.



- You can designate up to 100 locations using the printer driver.
- This function can be used together with combine (layout) printing.
- When the page specified as a chapter slip sheet print is the first page in the first chapter, and a cover sheet is specified on the same page, the chapter slip sheet print will be canceled due to cover sheet priority.
- The slip sheet should be the same size and orientation as the body paper.
- For details about printing methods, see the printer driver Help.

Slip Sheets


A slip sheet can be inserted between each page.




- If you load slip sheets on an interposer, slip sheets are not printed.
- The same paper feed tray cannot be set for the body of the document and the slip sheets.

Inserting a slip sheet between each page

Print




Blank




Inserting a slip sheet between OHP transparencies

Print



Blank






- Fold functions other than Z-fold and a ring binding function cannot be set when using slip sheets.
- When Sample Print is specified with Slip Sheets, only the first copy will be printed. The setting to print the rest of the copies is not stored on the machine.
- Collate, duplex printing, and staple functions will be canceled when using slip sheets.
- The slip sheet should be the same size and orientation as the body paper.
- When loading slip sheets in the tray, set the relevant paper size.
- If [Auto Tray Select] is selected in the [Input Tray:] list for the body paper, the paper will be delivered from a tray containing paper in \square orientation. Therefore, when the slip sheet has been set to \square orientation, the orientation of the output slip sheet and body paper will be different.

User Defined Pages

Using this function, you can specify the page numbers for each input tray.



- This function is available with the PCL 5c printer driver only.
- If [Document Server] is selected under [Job Type:], User Defined Page cannot be used.
- If [User Defined Pages] is selected under [Paper Selection:] on the [Paper] tab, [Layout:] cannot be selected.





• For details, see the printer driver Help.

Watermarks

Using this function, you can print documents with text watermarks.

This function increases a document's security and identifiability by embedding a specified text (watermark) on every page. You can specify only one type of watermark at a time.




- This function is also available using the PostScript 3 printer driver. For details, see PostScript 3 Supplement.
- You can create and apply custom watermarks. For details about creating original watermarks, see the printer driver Help.

Types of watermarks


This section explains the types of watermarks available.

Following are the pre-registered text watermarks that are available:


COPY




URGENT



CONFIDENTIAL




• DRAFT



92

• ORIGINAL



If Error Occurs with the Specified Paper Size and Type

An error message appears on the control panel when there is no tray for the selected paper size or type, or when paper loaded in the machine has run out. In that case, you can select the tray manually to continue printing, or cancel a print job.



- The tray cannot be changed if the following functions are set:
 - Staple
 - Punch
 - Z-fold
 - Duplex Print to a tray that does not support duplex printing
 - Front Cover Sheet
 - Back Cover Sheet
 - Slip Sheet
 - Chaptering
 - Chapter Slip Sheets
 - Separation Sheet
 - Designated Sheet Print



- If you cancel duplex printing through the error message, printing will continue from the tray that you select manually.
- If any of the following functions are set, you can continue printing by canceling the function:
 - Staple
 - Punch
 - Duplex
 - Z-fold
- If [Auto Continue] is enabled, printing from the manually selected tray will begin after a specified interval. For details about [Auto Continue], see "System".

Reference

• p.153 "System"

Printing from a Selected Tray

Use the following procedure to manually select the tray from which printing will continue.

- 1. Press the [Printer] key.
- Select a tray those that appear on the control panel to continue printing manually.If you want to print after adding paper to the tray, select the tray after loading the correct paper.
- 3. Press [Continue].

The machine prints using the selected tray.



If a tray with a smaller paper size is selected, the print job may be cut short, or other problems may
occur.

Canceling a Print Job

Use the following procedure to cancel a print job.

1. Press the [Printer] key.

The printer screen appears.

2. Press [Job Reset] or the [Clear/Stop] key.

Delete the stored print jobs, and then cancel printing.

3. Press [Reset the Job] to cancel the current print job, or [Reset All Jobs] to cancel all jobs.

A confirmation message appears.

4. Press [Yes] to cancel the print job.

Press [No] to return to the previous display.



- To resume print jobs, press [Resume Printing].
- If the machine is shared by multiple computers, be careful not to accidentally cancel someone else's print jobs.
- Under Windows, if the machine is connected to the computer using a parallel cable, sent print jobs
 may be canceled if [Reset All Jobs] is pressed while "Waiting for print data..." is on the control panel.
 After the interval set in [I/O Timeout] in Printer Features has passed, the next print job can be sent. A
 print job sent from a different client computer will not be canceled in this case.
- You cannot stop printing data that has already been processed. For this reason, printing may continue
 for a few pages after you press [Job Reset] or the [Clear/Stop] key.
- A print job containing a large volume of data may take considerable time to stop.

• For details, see "Canceling a Print Job".

■ Reference

• p.134 "Canceling a Print Job"

Spool Printing

Spool Printing allows print jobs transferred from a computer to be temporarily stored, and then prints them after they are transferred. This shortens printing time as it maximizes printer efficiency.



- During Spool Printing, the hard disk is accessed and the Data In indicator blinks. Turning off the
 computer or machine during Spool Printing can damage the hard disk. Also, if the computer or machine
 is turned off during Spool Printing, spooled jobs will be deleted. Therefore, do not turn the power of
 the computer or machine off during Spool Printing.
- If data is sent to the machine using other protocols besides "diprint", "lpr", "ipp", "ftp", "sftp", "smb", and "wsd (printer)", Spool Printing cannot be performed.

Setting Spool Printing

Spool Printing can be set using telnet or Web Image Monitor.

- Using Web Image Monitor
 - For details about Web Image Monitor, see "Using Web Image Monitor", Network and System Settings Reference.
- Using telnet
 - Type in "spoolsw spool on" to set Spool Printing.
 - For details about telnet, see "Remote Maintenance by telnet", Network and System Settings Reference.

Displaying the spool job list on the control panel

When Spool Printing is set, you can display on the control panel the spooled print jobs stored in the machine.

To display the spooled print jobs, press the [Printer] key, and then press [Spooling Job List]. The spooled print job list appears.

If Spool Printing is not set, you cannot select [Spooling Job List].

To delete a spooled print job stored in the machine, select the job you want to delete, and then press [Delete].

Viewing/Deleting spool jobs in Web Image Monitor

Start Web Image Monitor and enter the machine's IP address in the address bar. This displays the top page.

For details, see Network and System Settings Reference.



- Up to a maximum of 150 jobs at once can be spool printed.
- Printing the first page with Spool Printing will be slow.
- The computer requires less print processing time when large amounts of data are spooled.

2

• Stored spool jobs can be viewed or deleted using Web Image Monitor.

Registering Classification Codes


This section explains classification codes.

If you register classification codes, the printer logs the number of prints made under each code.

You can register classification codes to individual users and specified purposes, enabling you to monitor printer usage by each.

For example, you can manage accounts according to individual client computers or account titles.

Classification Code - Based Process (example)

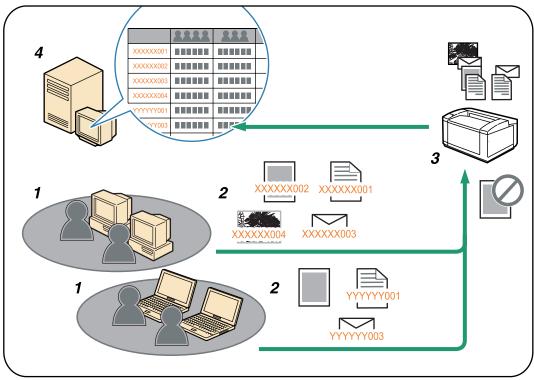

- BVC005
- 1. Divisions, sections, departments, project teams, users, etc., to be managed.
- 2. The appropriate classification code for the print job is entered.

For details, see "Specifying the Classification Code for a Print Job".

3. The job is printed.

When printing in an environment where classification codes are required, print jobs that do not have a classification code cannot be printed.

For details, see "Configuring Classification Codes".

4. Classification codes are collected and managed by an external log collection system.

Reference

- p.100 "Specifying the Classification Code for a Print Job"
- p.100 "Configuring Classification Codes"

Configuring Classification Codes

Use Web Image Monitor to specify whether or not to apply classification code requirement to print jobs.

Important

- The configuration page can be printed at any time.
- The default setting for classification code requirement is "Optional".
- Start Web Image Monitor.
- 2. Click [Login].

A dialog box for entering the login user name and login password appears.

- Enter the login user name and password, and then click [Login].
 For details about the login user name and password, consult your network administrator.
- 4. Click [Configuration] in the left area, and then click [Logs].
- Check that [Required] or [Optional] is selected for [Classification Code] in the [Common Settings for All Logs] column.

If "Required" is selected for the classification code requirement setting in Web Image Monitor, any print job that without a classification code specified will not be printed.

- 6. Click [OK].
- 7. Click [Logout].
- 8. Quit Web Image Monitor.

Specifying the Classification Code for a Print Job

When printing in an environment where classification codes are required, a classification code must be specified for each print job.

Important

• The PostScript 3 printer driver does not support the classification codes and it cannot be used to print under environment which the classification codes are required.

For the PCL 6 printer driver:

- 1. Open the [Printing Preferences] dialog box after creating a document in an application.
- 2. Click the [Detailed Settings] tab.

- 3. In the [Menu:] box, click the [Job Setup] icon.
- 4. Enter the classification code in the [Classification code:] box, and then click [OK].

This code identifies the user. The classification code can contain up to 32 alphanumeric (a-z, A-Z, 0-9, "-") characters.

- 5. Make any other necessary print settings, and then click [OK].
- 6. A confirmation message appears. Read it, and then click [OK].
- 7. Execute the print command.
- 8. The print job is sent to the printer.

For the PCL 5c printer driver:

- 1. Open the [Printing Preferences] dialog box after creating a document in an application.
- 2. Click the [Valid Access] tab.
- 3. Enter the classification code in the [Classification Code:] box.

This code identifies the user. The classification code can contain up to 32 alphanumeric (a-z, A-Z, 0-9, "-") characters.

- 4. Make any other necessary print settings, and then click [OK].
- 5. A confirmation message appears. Read it, and then click [OK].
- 6. Execute the print command.
- 7. The print job is sent to the printer.



- The specified classification code is stored in the printer driver.
- To switch between different classification codes, install the printer driver under different names, and specify different classification code for each driver.
- For details about how to view the log collected using Classification Code, see the manual for the external log collection system.

Reference

p.45 "Displaying the Printer Driver Settings Screen"

3. Printing Stored Documents

This chapter explains how to print documents stored in the machine.


Display Panel

This section describes configuration using the display panel when the printer function is selected.

Initial Display



- The machine switches to offline when you make settings in online mode. After you complete the setting, the machine switches to online automatically.
- If you make a setting when the machine is offline, it will stay offline afterwards.
- The function items displayed serve as selector keys. You can select or specify an item by pressing it lightly.
- When you select or specify an item on the control panel, it becomes highlighted.
- Keys dimmed (for example, OK) cannot be used.

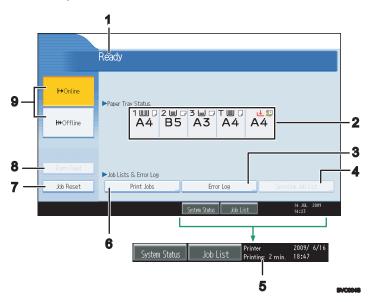

1. Operational status or messages

Displays current machine status, such as "Ready", "Offline", and "Printing...". Information about the print job (user ID and document name) appears in this section.

2. Paper Tray Status indicators

The paper tray settings appear.

3. Error Log

Press to display the error logs of print jobs sent from a computer.

4. Spooling Job List

Press to display spooled jobs.

5. Estimated time until printing completes

Displays estimated time until printing completes after receiving all data from the computer.

6. Print Jobs

Press to display print jobs sent from a computer.

7. Job Reset

Press to cancel the current print job.

If you press it when the machine is offline and Hex Dump is selected, Hex Dump is canceled.

8. Form Feed

Press to print all the data left in the machine's input buffer.

- When the machine is online, the status appears dimly.
- This function is not available with the RPCS printer language.

9. →Online / H→Offline

Press to switch the machine between online and offline.

When the machine is online, it can receive data from the computer.

When the machine is offline, it cannot receive data from the computer.




• When the power is turned on, the copier display is shown. This is a factory default. This initial setting can be changed. For details, see "System Settings", Network and System Settings Reference.

Simplified Display

This section explains how to switch to the simplified display.

When you press the [Simplified Display] key, the screen changes from the initial display to the simplified display. Letters and keys are displayed at a larger size, making operations easier.



Example of a simplified display





- To return to the initial display, press the [Simplified Display] key again.
- Certain keys do not appear on the simplified display.
- The [Simplified Display] key is lit when the simplified display is active.

Using the Print Job Function

This describes how to print files stored in the machine.

The following types of printing can be selected using the printer driver: Sample Print, Locked Print, Hold Print, and Stored Print.

You can print or delete the print jobs stored in the machine which is sent from computers.

If you select Sample Print, Locked Print, and Hold Print, the print files stored in the machine are deleted after printing is completed. If you select Stored Print, the files remain in the machine even after printing is finished.

In the [Initial Print Job List] settings on the [System] tab under [Printer Features], the [Complete List] or the [List Per User ID] screen appears depending on which list type you selected.




Selecting the Initial Print Job List

Follow the procedure below to set the initial Print Jobs screen, and to show it.

Selecting the Initial Print Job List

1. Press the [User Tools/Counter] key.



2. Press [Printer Features].

The [Printer Features] menu appears.

3


- 3. On the [System] tab, press [Initial Print Job List].
- 4. Select either [Complete List] or [List Per User ID].




After configuring the settings, the selected type of print job list is displayed.

Displaying a Print Job List

1. Press the [Printer] key.




2. Press [Print Jobs].



Either the Complete List or List Per User ID screen appears.

Complete List

If you select [Complete List] from [Initial Print Job List], the following screen appears:

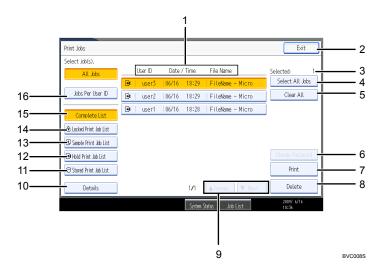

1. User ID, Date / Time, and File Name display

Displays the time when the instruction to print the stored files was entered, the User IDs, and the file names.

2. Exit

Returns to the printer screen.

3. Selected:

Displays number of the files selected.

4. Select All Jobs

Selects all files stored in the machine.

5. Clear All

Clears all selections.

6. Change Password

Changes or deletes the password of a file if a password is set. To change the password, press [Change Password], enter the current password, and then enter the new password on the confirmation screen. To delete the password, press [Change Password], leave the entering/confirming a new password box blank, and then press [OK].

You can also set passwords to the Stored Print files that do not currently have passwords.

7. Print

Prints a selected file.

8. Delete

Deletes a selected file.

9. ▲Previous/▼Next

If the list of files does not fit on the screen, scroll up or down to view the list.

10. Details

Displays details about a selected file.

11. Stored Print Job List

Displays only Stored Print files stored in the machine.

12. Hold Print Job List

Displays only Hold Print files stored in the machine.

13. Sample Print Job List

Displays only Sample Print files stored in the machine.

14. Locked Print Job List

Displays only Locked Print files stored in the machine.

15. Complete List


Displays all files stored in the machine.

16. Jobs Per User ID

Displays List Per User ID.

List Per User ID

If you select [List Per User ID] from [Initial Print Job List], the following screen appears:



1. User ID

Displays the User IDs who sent files to the machine.

2. Clear

Clears a selection.

3. Exit

Returns to the printer screen.

4. Complete List

Displays all print jobs.

5. List Per User ID

Displays the print job list of each ID.

6. Print All Jobs

Prints all selected type of files sent by the user ID.

7. ▲Previous/▼Next

If the list of files does not fit on the screen, scroll up or down to view the list.



- Multiple files can be selected on the Print Jobs screen. To clear selection, press the selected print jobs again.
- The display is not updated if a new file is stored while the list of stored files is displayed. To update the display, press [Exit] to return to the printer screen, and then press [Print Jobs] again.
- If a large number of print jobs are stored in the machine, processing may slow down temporarily, depending on which functions are used.
- If you press [List Per User ID] in the Complete List screen, the screen switches to the List Per User ID screen where [Back] appears at the bottom right. Press [Back] to switch to the Complete List screen.
- For details about Sample Print, Locked Print, Hold Print, and Stored Print, see "Printing from the Print Job Screen".

Reference

• p.111 "Printing from the Print Job Screen"

Printing from the Print Job Screen

This section explains how to use the Sample Print function, Locked Print function, Hold Print function, Store and Print function, and Stored Print function.

Sample Print

Use this function to print only the first set of a multiple-set print job. After you have checked the result, remaining sets can be printed or canceled using the control panel. This can reduce misprints due to mistakes in contents or settings.



- A Sample Print file cannot be stored if:
 - the total number of Sample Print, Locked Print, Hold Print, and Stored Print files in the machine is over 100. (The maximum number varies depending on the volume of data in files.)
 - the file contains over 3,000 pages.
 - the machine's sent or stored files total over 15,000 black-and-white pages. (The total varies
 depending on the size of the files.)
 - the machine's sent or stored files total over 5,000 color pages. (The total varies depending on the size of the files.)



- The PostScript 3 printer driver is also available for this machine. For details about installing and configuring the PostScript 3 printer driver, see PostScript 3 Supplement.
- If a Sample Print file has not been stored properly, check the error log on the control panel. For details about the error log on the control panel, see "Checking the Error Log".
- Even after you turn off the machine, stored documents in the machine remain. However, the [Auto Delete Temporary Print Jobs] or [Auto Delete Stored Print Jobs] settings are applied first. For details about the auto delete settings, see "System".
- Make sure the [Ignore Application Collate] check box in the printer driver and the [Collate] check
 box in the application's [Print] dialog box are both cleared. By default, Sample Print jobs are
 automatically collated by the printer driver. If collate is enabled in the application, more prints than
 intended may be produced.
- If the first set of the Sample Print file is not as you expected and you do not want to print remaining
 sets, delete the Sample Print file using the control panel. If you print the remaining sets of the Sample
 Print file, the job in the machine is deleted automatically. To delete the Sample Print file, see "Deleting
 Sample Print files".

■ Reference

• p.136 "Checking the Error Log"

- p.153 "System"
- p.113 "Deleting Sample Print files"

Printing a Sample Print file

The following procedure describes how to print a Sample Print file with the PCL 5c/6 printer driver.




- Applications with their own drivers, such as PageMaker, do not support this function.
- Configure Sample Print in the printer driver's properties.
 For details about configuring the printer drivers, see the relevant Help files.
- 2. Start printing from the application's [Print] dialog box.

Make sure to set more than two copies.

The Sample Print job is sent to the machine, and the first set is printed.

- 3. On the control panel, press the [Printer] key to display the printer screen.
- 4. Press [Print Jobs].



A list of print files stored in the machine appears.

5. Press [Sample Print Job List].



A list of Sample Print files stored in the machine appears.

Depending on the security settings, certain print jobs may not be displayed.

6. Select the file you want to print, and press [Print].



7. Enter the new number of sets using the number keys if necessary, and then press [Yes].



You can enter up to 9999 sets.

Press the [Clear/Stop] key to correct any entry mistakes.

The remaining sets are printed.



- Pressing the [Clear/Stop] key after you press [Yes] in step 7 cancels printing. The file will remain in the machine.
- If you want to cancel printing, press [No] in step 8.
- If you select multiple files, the confirmation screen displays the total number of files to be printed.
- If you select multiple documents and do not specify the number of sets on the confirmation screen,
 one set less than the number specified on the computer is printed for every selected document. If the
 number of sets specified on the computer is "1", one set each is printed for every document.
- When printing accumulated sample print documents, you cannot change the numbers of sets.
- When printing is completed, the stored file will be deleted.
- To stop printing after printing has started, press [Exit] until the printer screen appears, and then press [Job Reset]. The file will be deleted.

Deleting Sample Print files

If you are not satisfied with the sample printout, you can delete the Sample Print file, revise it and print it again until the settings are suitable.

- 1. Press the [Printer] key to display the printer screen.
- 2. Press [Print Jobs].
- 3. Press [Sample Print Job List].

A list of Sample Print files stored in the machine appears.

Depending on the security settings, certain print jobs may not be displayed.

4. Select the file you want to delete, and then press [Delete].

The delete confirmation screen appears.

5. Press [Yes] to delete the file.

The selected file is deleted.



- If you do not want to delete the file, press [No] in step 5.
- If you select multiple files, the confirmation screen displays the total number of files to be deleted.

Locked Print

Use this function to maintain privacy when printing confidential documents on the machine over a shared network. Usually, it is possible to print data using the control panel once it is stored in this machine. When using Locked Print, it is not possible to print unless a password is entered on the control panel. Your confidential documents will be safe from being viewed by other people.



- A Locked Print file cannot be stored if:
 - the total number of Sample Print, Locked Print, Hold Print, and Stored Print files in the machine is over 100. (The maximum number varies depending on the volume of data in files.)
 - the file contains over 3,000 pages.
 - the machine's sent or stored files total over 15,000 black-and-white pages. (The total varies
 depending on the size of the files.)
 - the machine's sent or stored files total over 5,000 color pages. (The total varies depending on the size of the files.)



- The PostScript 3 printer driver is also available for this machine. For details about installing and configuring the PostScript 3 printer driver, see PostScript 3 Supplement.
- If a Locked Print file has not been stored properly, check the error log on the control panel. For details
 about the error log on the control panel, see "Checking the Error Log".

- Even after you turn off the machine, stored documents remain. However, the [Auto Delete Temporary Print Jobs] or [Auto Delete Stored Print Jobs] settings are applied first. For details about the auto delete settings, see "System".
- Make sure the [Ignore Application Collate] check box in the printer driver and the [Collate] check
 box in the application's [Print] dialog box are both cleared. By default, Locked Print jobs are
 automatically collated by the printer driver. If collate is enabled in the application, more prints than
 intended may be produced.

Reference

- p.136 "Checking the Error Log"
- p.153 "System"

Printing a Locked Print file

The following procedure describes how to print a Locked Print file with the PCL 5c/6 printer driver.

- Applications with their own drivers, such as PageMaker, do not support this function.
- Configure the Locked Print in the printer driver's properties.
 For details about configuring the printer drivers, see the corresponding Help files.
- 2. Click [OK] to close the printer driver's properties.
- Start printing from the application's [Print] dialog box.
 The Locked Print job is sent to the machine.
- 4. On the control panel, press the [Printer] key to display the printer screen.
- 5. Press [Print Jobs].



A list of print files stored in the machine appears.

6. Press [Locked Print Job List].



A list of Locked Print files stored in the machine appears.

Depending on the security settings, certain print jobs may not be displayed.

7. Select the file you want to print, and then press [Print].



The password screen appears.

8. Enter the password using the number keys, and then press [OK].



The print confirmation screen appears.

A confirmation screen will appear if the password is not entered correctly. Press [Exit] to enter the password again.

If multiple print files are selected, the machine prints files that correspond to the entered password. The number of files to be printed is displayed on the confirmation screen.

If you forgot your password, ask your file administrator for help.

9. Press [Yes].

The locked file is printed.





- Pressing the [Clear/Stop] key after you press [Yes] in step 9 cancels printing. The file will remain in the machine.
- If you want to cancel printing, press [No] in step 9.
- When printing is completed, the stored file will be deleted.
- To stop printing after printing has started, press [Exit] until the printer screen appears, and then press
 [Job Reset]. The file will be deleted.

Deleting Locked Print files

- 1. Press the [Printer] key to display the printer screen.
- 2. Press [Print Jobs].
- 3. Press [Locked Print Job List].

A list of Locked Print files stored appears.

Depending on the security settings, certain print jobs may not be displayed.

4. Select the file you want to delete, and then press [Delete].

The password screen is displayed.

5. Enter the password using the number keys, and then press [OK].

The delete confirmation screen appears.

A confirmation screen will appear if the password is not entered correctly. Press [Exit] to enter the password again.

If you forgot your password, ask your file administrator for help.

6. Press [Yes].

The selected file is deleted.



- If you do not want to delete the file, press [No] in step 6.
- If multiple print files are selected, the machine deletes files that correspond to the entered password.

 The number of files to be deleted is displayed on the confirmation screen.

Hold Print

Use this function to temporarily hold a file in the machine, and print it from the computer or the control panel later.



• A Hold Print file cannot be stored if:

- the total number of Sample Print, Locked Print, Hold Print, and Stored Print files in the machine is over 100. (The maximum number varies depending on the volume of data in files.)
- the file contains over 3,000 pages.
- the machine's sent or stored files total over 15,000 black-and-white pages. (The total varies
 depending on the size of the files.)
- the machine's sent or stored files total over 5,000 color pages. (The total varies depending on the size of the files.)



- The PostScript 3 printer driver is also available for this machine. For details about installing and configuring the PostScript 3 printer driver, see PostScript 3 Supplement.
- If a Hold Print file has not been stored properly, check the error log on the control panel. For details about the error log on the control panel, see "Checking the Error Log".
- Even after you turn off the machine, stored documents in the machine remain. However, the [Auto Delete Temporary Print Jobs] or [Auto Delete Stored Print Jobs] settings are applied first. For details about the auto delete settings, see "System".
- Make sure the [Ignore Application Collate] check box in the printer driver and the [Collate] check
 box in the application's [Print] dialog box are both cleared. By default, Hold Print jobs are
 automatically collated by the printer driver. If collate is enabled in the application, more prints than
 intended may be produced.

Reference

- p.136 "Checking the Error Log"
- p.153 "System"


Printing a Hold Print file

The following procedure describes how to print a Hold Print file with the PCL 5c/6 printer driver.



- Applications with their own drivers, such as PageMaker, do not support this function.
- Configure Hold Print in the printer driver's properties.
 For details about configuring the printer drivers, see the relevant Help files.
- 2. Click [Details...], and then enter a User ID in the [User ID:] box.
- 3. Click [OK] to close [Details...], and then click [OK] to close the printer driver's properties.
- 4. Start printing from the application's [Print] dialog box.
 The Hold Print job is sent to the machine and stored.
- 5. On the control panel, press the [Printer] key to display the printer screen.

6. Press [Print Jobs].



7. Press [Hold Print Job List].



A list of Hold print files stored in the machine appears.

Depending on the security settings, certain print jobs may not be displayed.

8. Select the file you want to print, and press [Print].



The confirmation screen appears.

9. Press [Yes].

The Hold Print file is printed.



- Pressing the [Clear/Stop] key after you press [Yes] in step 9 cancels printing. The file will remain in the machine.
- If you want to cancel printing, press [No] in step 9.
- When printing is completed, the stored file is deleted.

- To stop printing after printing has started, press [Exit] until the printer screen appears, and then press
 [Job Reset]. The file will be deleted.
- · If you select multiple files, the confirmation screen displays the total number of files to be printed.
- For details about setting printer drivers, see the printer driver Help.
- You can also print or delete a Hold Print file from Web Image Monitor. For details, see Web Image Monitor Help.

Deleting Hold Print files

- 1. Press the [Printer] key to display the printer screen.
- 2. Press [Print Jobs].
- 3. Press [Hold Print Job List].

A list of Hold Print files stored in the machine appears.

Depending on the security settings, certain print jobs may not be displayed.

4. Select the file you want to delete, and then press [Delete].

The delete confirmation screen appears.

5. Press [Yes] to delete the file.

The selected file is deleted.



- If you do not want to delete the file, press [No] in step 5.
- If you select multiple files, the confirmation screen displays the total number of files to be deleted.

Stored Print

Use this function to store a file in the machine, and then print it from the computer or the control panel later. Jobs are not deleted after they are printed, so the same job needs not to be re-sent in order to print multiple copies.



- A Stored Print file cannot be stored if:
 - the total number of Sample Print, Locked Print, Hold Print, and Stored Print files in the machine is over 100. (The maximum number varies depending on the volume of data in files.)
 - the file contains over 3,000 pages.
 - the machine's sent or stored files total over 15,000 black-and-white pages. (The total varies depending on the size of the files.)

• the machine's sent or stored files total over 5,000 color pages. (The total varies depending on the size of the files.)

U Note

- The PostScript 3 printer driver is also available for this machine. For details about installing and configuring the PostScript 3 printer driver, see PostScript 3 Supplement.
- If a Stored Print file has not been stored properly, check the error log on the control panel. For details about the error log on the control panel, see "Checking the Error Log".
- Even after you turn off the machine, stored documents remain. However, the [Auto Delete Temporary Print Jobs] or [Auto Delete Stored Print Jobs] settings are applied first. For details about the auto delete settings, see "System".
- Make sure the [Ignore Application Collate] check box in the printer driver and the [Collate] check
 box in the application's [Print] dialog box are both cleared. By default, Stored Print jobs are
 automatically collated by the printer driver. If collate is enabled in the application, more prints than
 intended may be produced.
- You can optionally set a document title and a password of a Stored Print file. For details about a
 password setting, see the printer driver Help.

Reference

- p.136 "Checking the Error Log"
- p.153 "System"

Printing a Stored Print file

The following procedure describes how to print a Stored Print file with the PCL 5c/6 printer driver.



- Applications with their own drivers, such as PageMaker, do not support this function.
- 1. Configure Stored Print in the printer driver's properties.

You can select four methods of Stored Print:

To use the Stored Print (Shared) and Store and Print (Shared) functions, authentication must be enabled beforehand. For details, consult your administrator.


- Stored Print
 - Stores the file in the machine and prints it later using the control panel.
- · Store and Print

Prints the file at once and also stores the file in the machine.

Stored Print (Shared)

Stores the file in the machine and allows any user who has print privileges to print the file later using the control panel.

- Store and Print (Shared)
 Prints the file immediately and also stores the file in the machine. Any user who has print privileges can print any stored file afterward.
- Click [Details...], and then enter a User ID in the [User ID:] box.
 You can also set a password. The same password must be entered when printing or deleting.
- 3. Click [OK] to close [Details...], and then click [OK] to close the printer driver's properties.
- **4.** Start printing from the application's [Print] dialog box. The Stored Print job is sent to the machine and stored.
- 5. On the control panel, press the [Printer] key to display the printer screen.
- 6. Press [Print Jobs].



7. Press [Stored Print Job List].



A list of Stored Print files stored in the machine appears.

8. Select the file you want to print, and press [Print].



The confirmation screen appears.

If you set a password in the printer driver, a password confirmation screen appears. Enter the password.

If multiple print files are selected, and some of these require a password, the machine prints files that correspond to the entered password and files that do not require a password. The number of files to be printed is displayed on the confirmation screen.

If you forgot your password, ask your file administrator for help.

9. Enter the number of sets using the number keys if necessary, and then press [Yes].



You can enter up to 9999 sets.

Press the [Clear/Stop] key to correct any entry mistakes.

The Stored Print file is printed.



- Pressing the [Clear/Stop] key after you press [Yes] in step 9 cancels printing. The file will remain in the machine.
- If you want to cancel printing, press [No] in step 10.
- If you select multiple files, the confirmation screen displays the total number of files to be printed. If
 you select multiple documents, set numbers are determined based on the smallest set number specified
 for a selected document.
- When printing accumulated stored print documents, you cannot change the numbers of sets.
- To stop printing after printing has started, press [Exit] until the printer screen appears, and then press
 [Job Reset]. A Stored Print file is not deleted even if [Job Reset] is pressed.
- The Stored Print file that sent to the machine is not deleted unless you delete a file or select [Auto Delete Stored Print Jobs]. For details about the auto delete settings, see "System".
- For details about setting printer drivers, see the printer driver Help.
- You can also print or delete a Stored Print file from Web Image Monitor. For details, see Web Image Monitor Help.

Reference

• p.153 "System"

Deleting Stored Print files

- 1. Press the [Printer] key to display the printer screen.
- 2. Press [Print Jobs].
- 3. Press [Stored Print Job List].

A list of Stored Print files stored in the machine appears.

Depending on the security settings, certain print jobs may not be displayed.

4. Select the file you want to delete, and press [Delete].

The delete confirmation screen appears.

If you set the password in the printer driver, enter the password to delete.

If multiple print files are selected, and some of these require a password, the machine deletes files correspond to the entered password and files that do not require a password. The number of files to be deleted is displayed on the confirmation screen.

If you forgot your password, ask your file administrator for help.

5. Press [Yes] to delete the file.

The selected file is deleted.



- If you do not want to delete the file, press [No] in step 5.
- If you select multiple files, the confirmation screen displays the total number of files to be deleted.

Printing from the Jobs Per User ID Screen

This describes how to print the files saved in the machine from the user ID screen.

In the [Initial Print Job List] settings on the [System] tab under [Printer Features], the [Complete List] or the [List Per User ID] screen appears depending on which list type you selected.




Printing the Selected Print Job

1. Press the [Printer] key.

The printer screen appears.

2. On the printer screen, press [Print Jobs].



A list of user IDs whose files are stored in the machine appears.

3. Press the user ID whose file you want to print.



You cannot select multiple user IDs at the same time.

Press [▲Previous] or [▼Next] to scroll through the list.

Press [Clear] to cancel a selection.

4. Press [List Per User ID].



The print job list of the selected user ID appears.

5. Select the desired print jobs.



To cancel a selection, press the highlighted print job again. To clear all selections, press [Clear All].

6. Press [Print].

The confirmation screen appears.

7. Press [Yes].

The selected files are printed.




• If you select multiple files, the confirmation screen displays the total number of files to be printed.

Printing All Print Jobs

1. Press the [Printer] key.

The printer screen appears.

2. On the printer screen, press [Print Jobs].



A list of user IDs whose files are stored in the machine appears.

3. Press the user ID whose file you want to print.



You cannot select multiple user IDs at the same time.

Press [▲Previous] or [▼Next] to scroll through the list.

Press [Clear] to cancel a selection.

4. Press [Print All Jobs].



If the selected user ID has multiple types of print jobs, the selection screen of the print job type appears.

5. Select the desired print job type, and then press [OK].



The confirmation screen appears.

The confirmation screen does not appear if the selected ID has only one type of print job.

6. Press [Yes].

The selected files are printed.



- After printing is completed, Sample Print, Locked Print, and Hold Print files are deleted.
- You cannot select a print job that is not stored under the selected user ID.
- If you select multiple Sample Print files and do not specify the number of sets on the confirmation screen, one set less than the number specified on the computer is printed for every selected document. If the number of sets specified on the computer is "1", one set each is printed for every document.
- If you select Stored Print, the number you set on the confirmation screen is applied to all files of the selected print job type. If you do not set a quantity, the minimum number is applied to all files.
- If you select Locked Print, enter the correct password. If there are multiple passwords, the machine prints only files that correspond to the entered password.
- If you select Stored Print files, and some of these require a password, the machine prints files that correspond to the entered password and files that do not require a password.
- The confirmation screen displays the total number of files that have the selected user ID to be printed.

Job List

Jobs printed using Copy, Document Server, or Printer mode are temporarily stored in the machine, and then executed in order. The Job List function allows you to manage these jobs.

For example, you can cancel incorrect job settings or print an urgent document.



- You cannot use the Job List function when the machine is in Interrupt mode.
- Documents printed using the facsimile function and scanner function are not displayed in the Job List.


Job List Screen

This section explains displays and icons that appear in the Job List screen.

The Job List screen varies depending on whether [Job Order] is selected with [Print Priority] for [System Settings]. For details about setting procedure, see "System Settings", Network and System Settings Reference.


When [Job Order] is not selected:

The job list is displayed for each of the functions.



When [Job Order] is selected:

The job list is displayed for all functions in the order of print jobs.



- 1. Switches between job lists for each function.
- 2. Switches between Current / Waiting Job List and Job History.
- 3. Displays the function used to print jobs.
 - J: Job printed using copier function
 - 3: Job printed using printer function
 - D: Job printed using Document Server function
 - : Job printed using DeskTopBinder
 - Using Web Image Monitor
- 4. Displays reserved job numbers.

Checking Jobs in the Job List

You can check the contents of jobs in the job list.

- 1. Press [Job List].
- 2. Select a job whose contents you want to check.



- 3. Press [Details], and then check the contents.
- 4. Press [Exit].

Changing the Order of Jobs

You can change the order of jobs in the job list.

- 1. Press [Job List].
- 2. Select a job whose order you want to change.



- 3. Press [Change Order].
- 4. Change the order using [▲Top], [▲Previous], or [▼Next].



5. Press [OK].

Holding Jobs

You can hold jobs that are queued or currently printing.

1. Press [Job List].



3. Press [Suspend Printing].

The selected job and the jobs that follow it are suspended. "Suspended" is displayed at the left of the jobs in the job list that are suspended.




- To resume the suspended jobs, press [Resume Printing].
- This function is available only if [Job Order] is specified.

Deleting Jobs

You can delete a job that is queued or currently printing.

- 1. Press [Job List].
- 2. Select a job you want to delete.



To delete multiple print jobs, select all print jobs you want to delete.

- 3. Press [Delete Reservation].
- 4. Press [OK].

Checking the Job History

You can view the history and contents of completed print jobs.

3

- 1. Press [Job List].
- 2. Press [Job History].

A list of completed print jobs appears.

- 3. Select a job whose contents you want to check.
- 4. Press [Details], and then check the contents.
- 5. Press [Exit].

Canceling a Print Job

This section gives instruction to stop printing from the computer or the control panel after confirming to start printing.

- 1. Check the machine to see if relevant data is printing. If the Data In indicator lights up or blinks, the machine is receiving data from a computer.
- 2. Cancel printing.


Since canceling procedures vary depending on the print job status, check the job status and cancel printing according to the following procedure.

Canceling a Print Job Using the Control Panel

1. Press the [Printer] key.

The printer screen appears.

2. Press [Job Reset].



3. Press [Reset the Job] or [Reset All Jobs].



- [Reset the Job]: cancels the print job currently being processed.
- [Reset All Jobs]: cancels all jobs in the print queue.
- [Resume Printing]: resumes printing print jobs.

A confirmation message appears.

3

- 4. Press [Yes] to cancel the print job.
- 5. Press [No] to return to the previous display.

Windows - Canceling a Print Job from the computer

You can cancel a print job from the computer if transferring print jobs is not completed.

- 1. Double-click the printer icon on the Windows task tray.
 - A window appears, showing all print jobs currently queued for printing. Check the current status of the job you want to cancel.
- 2. Select the name of the job you want to cancel.
- 3. On the [Document] menu, click [Cancel].
- 4. Press the [Printer] key on the control panel.



- If the machine is shared by multiple computers, be careful not to accidentally cancel someone else's print jobs.
- If the machine is connected to the computer using a parallel cable, sent print jobs may be canceled if [Reset All Jobs] is pressed while "Waiting for print data..." is on the control panel. After the interval set in [I/O Timeout] in Printer Features has passed, the next print job can be sent. A print job sent from a different client computer will not be canceled in this case.
- Under Windows XP/Vista, or Windows Server 2003/2003 R2/2008, click [Cancel] on the [Document] menu.
- Under Windows 2000, you can also open the print job queue window by double-clicking the machine icon in the [Printers] machine window.
- You cannot stop printing data that has already been processed. For this reason, printing may continue
 for a few pages after you press [Job Reset].
- A print job containing a large volume of data may take considerable time to stop.

Checking the Error Log


If files could not be stored due to printing errors, identify the cause of the errors by checking the error log on the control panel.



- The most recent 50 errors are stored in the error log. If a new error is added when there are 50 errors already stored, the oldest error is deleted. However, if the oldest error belongs to one of the following print jobs, it is not deleted. The error is stored separately until the number of those errors reaches 30. You can check any of these print jobs for error log information.
 - Sample Print
 - Locked Print
 - Hold Print
 - Stored Print
- If the main power switch is turned off, the error log is deleted.
- 1. Press the [Printer] key.

The printer screen appears.

2. Press [Error Log].



An error log list appears.

Depending on the security settings, certain errors may not be displayed.

3. Press the desired job list.

You can select job list from [Complete List], [Locked Print Job List], [Sample Print Job List], [Hold Print Job List], or [Stored Print Job List].

4. Select the print file you want to check, and then press [Details].

A detailed error log appears.

Press [▲Previous] or [▼Next] to scroll the error files.



- Press [Exit] after checking the log.
- Press [Back to List] to return to the error log list.
- To print files that appear in the error log, resend them after stored files have been printed or deleted.
- [Error Log] is not available in simplified display mode. To view the error log, you must first switch to normal display mode by pressing [Simplified Display] to turn into the normal display mode.

4. Printing a PDF File Directly

This chapter explains how to print PDF files directly without having to open a PDF application by using DeskTopBinder Lite or UNIX commands.

Using DeskTopBinder Lite

This section explains how to print PDF files directly without having to open a PDF application by using DeskTopBinder Lite. To use this function, you must first download DeskTopBinder Lite from the supplier's Website and install it on your computer. Contact your local dealer for information on downloading DeskTopBinder Lite.



- This function is possible only when an optional PostScript 3 unit is installed.
- This function is possible for genuine Adobe PDF files only.
- Version 1.3, 1.4, 1.5, and 1.6 PDF files are compatible.
- PDF files created using PDF version 1.5 Crypt Filter functions or more than eight DeviceN Color Space components cannot be printed.
- PDF files created using PDF version 1.6 watermark note functions, or extended optional contents cannot be printed.
- PDF version 1.7 (Acrobat 8.0) files created without any functions that are exclusive to PDF version 1.7 can be printed.
- If the document contains transparency function data, it may fail to print. When this happens, use the
 printer driver to print the document.



• Paper size errors may occur when printing on custom size paper.

Expanding DeskTopBinder Lite Features

This section explains how to extend the features of DeskTopBinder Lite.

To extend a feature, click on its icon in the [Type:] list.

The following procedure explains using the extended features Wizard to print PDF files directly.

 On the [Start] menu, point to [All Programs], [DeskTopBinder], and then click [Extended Features Wizard].

The [Extended Features Wizard] dialog box appears.

2. Select [Easy settings], and then click [Start]. Click [Next>] repeatedly until the [Printing Function2] dialog box appears.

If you select [All function settings], and then click [Start]. Click the [Output] icon on the [Type:] list. Select [PDF Direct Print] in [Selectable function(s):], and then click [Add].

3. In the [Printing Function2] dialog box, click [Add...].

The [PDF Direct Print Properties] dialog box appears.

4. Select the machine's name, and then click [OK].

The [PDF Direct Print Properties] dialog box closes.

- 5. Click [Specify...], and then enter the IP address or host name of the machine.
- 6. Click [Next>] repeatedly until [Finish] appears.
- 7. Click [Finish].

Function Palette

The Function Palette contains buttons for functions that are already configured through expanded DeskTopBinder Lite functions. Using these buttons, you can print Windows files, preview printouts, convert images, and register scanners for documents without having to open DeskTopBinder Lite. You can also use these functions simply by dragging a target file to the button corresponding to the required function and dropping it there.

 On the [Start] menu, point to [All Programs], [DeskTopBinder], and then click [Function Palette].

An icon for the Function palette is added to the task tray displayed at the bottom right of the screen.

- 2. Right-click the new icon that has been added to the task tray, and then click [Properties...].

 The [Properties] dialog box appears.
- 3. Click the [Contents] tab, select the [PDF Direct Print] check box at the center, and then click [OK].

The [Properties] screen closes and the [PDF Direct Print] icon is added to the palette.


PDF Direct Printing Using Function Palette

Follow the procedure below to print PDF files directly.

- 1. Drag the PDF file you want to print to the PDF Direct Printing icon on the Function Palette and drop it there.
 - The [Output File List PDF Direct Print] dialog box appears.
- 2. Highlight the PDF file you want to print, and then click [OK].

 The PDF file is printed.

PDF Direct Print Properties

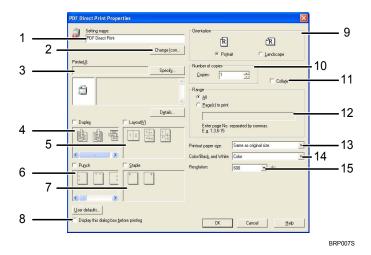

1. Setting name:

Displays the plug-in configuration name (up to 63 single byte characters)

2. Change Icon...

Changes the icon displayed on the tool bar.

3. Printer:

Displays printer's IP address or hostname.

4. Duplex

Prints on both sides of sheets.

5. Layout

Prints multiple pages on a single sheet.

6. Punch

Punches holes in printed sheets.

7. Staple

Staples together printed sheets.

8. Display this dialog box before printing

Appears in PDF direct printing mode if this check box is selected.

9. Orientation:

Specify the original's orientation.

10. Number of copies

Specify the number of copies to print.

11. Collate

Sorts printed sheets.

12. Range:

Specify which paper to print.

13. Printout paper size:

Specify the paper size you want copies to be printed onto.

14. Color/Black and White:

Specify color or black-and-white printing.

15. Resolution:

Specify a print resolution.

Using UNIX Commands

This section explains how to print PDF files directly using printing commands, such as "ftp", "sftp", and "lpr".

Sending a PDF file

Use the following procedure to send a PDF file to this machine using printing commands.

Following is an example when using the "lpr" command to print a PDF file by specifying the machine's IP address.

For details about the printing commands, see UNIX supplement.

%lpr -S "printer's IP address" [-Poption] [-o 1]\ "path"\"PDF file name"



- Replace the strings enclosed in quotations with the appropriate setting's value.
- Entering the text enclosed in brackets [] is optional.

Entering the PDF Password

Use the following procedure to print a password protected PDF file directly.

To print a PDF file that is protected by a password, enter the password using the control panel, Web Image Monitor, or the PJL command. When the password is entered using the PJL command, the password entered using the control panel or Web Image Monitor is ignored.

Using the PJL command

To enter the password for a password protected PDF file, use the following command and value in conjunction with the PJL command.

- Command: SET
- Value: PDFPASSWORD
- Example: @PJL SET PDFPASSWORD=the PDF password

Up to 32 ASCII characters (0x20 - 0x7E (Except 0x22)) can be entered as the PDF password.

Using the Control Panel

To enter a PDF password using the control panel, select [Change PDF Password] on [PDF Menu] under Printer Features.

Using Web Image Monitor

To enter the PDF password using Web Image Monitor, select [Set Password], and then set [PDF Temporary Password].

5. Saving and Printing Using the Document Server

This chapter explains how to use the Document Server function.

Accessing the Document Server

The Document Server enables you to store documents on the machine's hard disk, and allows you to edit and print them as necessary.



• Applications with their own drivers, such as PageMaker, do not support this function.



- When you use the Document Server, the following functions can be selected using the control panel:
 - Copies
 - Collate
 - Duplex
 - Staple
 - Paper selection: Paper source tray, paper type, paper output tray.
 - Functions related to paper selection: Cover Sheet, Slip Sheet.
- The above items are dimmed, so you cannot set them from the printer properties dialog box when the Document Server is selected.
- You must enter a user ID, using up to eight alphanumeric characters.
- You should enter a password and file name to distinguish the job from others.
- Up to 3,000 files can be stored in the Document Server. New files cannot be stored when 3,000 files have already been stored. Even if less than 3,000 files are stored, new files cannot be stored when
 - a file to be stored contains more than 3,000 pages.
 - the machine's sent or stored files total over 15,000 black-and-white pages. (The total varies depending on the size of the files.)
 - the hard disk is full.
 - the machine's sent or stored files total over 5,000 color pages. (The total varies depending on the size of the files.)
- The Document Server also stores files scanned using the ADF or exposure glass. You should delete
 unnecessary stored files once in a while so as not to exceed the capacity of the hard disk. For details
 about deleting stored files, see "Document Server", Copy and Document Server Reference.

- When using the hard disk for functions other than those of Document Server, you may not be able to store new files in the Document Server, even if there are less than 3,000 files stored.
- For details about Document Server functions, see "Document Server", Copy and Document Server Reference.
- For details about how to access Document Server from a client computer, see the printer driver Help.

6. Printer Features

This chapter describes user tools under Printer Features menu.

Accessing User Tools

This section describes how to access User Tools menu.

User Tools allow you to change or set defaults.




- Operations for system settings differ from normal operations. Always quit User Tools when you have finished.
- Any changes you make with User Tools remain in effect even if the main power switch or operation switch is turned off, or the [Energy Saver] or [Clear Modes] key is pressed.

Changing Default Settings

This section describes how to change the settings of User Tools.



- If Administrator Authentication Management is specified, contact your administrator.
- 1. Press the [User Tools/Counter] key.




2. Press [Printer Features].

3. Change settings by following instructions on the display, and then press [OK].

Quitting User Tools

This section describes how to quit the settings of User Tools.





• You can also quit User Tools by pressing [Exit] on the upper-right of the display.

List / Test Print

This section describes the user tools in the List / Test Print menu under Printer Features.

Multiple Lists

You can print the configuration page and error log.

Configuration Page

You can print the machine's current configuration values.

Error Log

You can print error logs listing all errors that occurred during printing. The most recent 50 errors are stored in the error log. If a new error is added when there are 50 errors already stored, the oldest error is deleted. However, if the oldest error belongs to one of the following types of print jobs, it is not deleted. Instead, it will be stored separately in error logs for each job type, up to a maximum of 30 for each log. You can check any of these print jobs for error log information.

- · Sample Print
- Locked Print
- Hold Print
- Stored Print

The records of jobs canceled automatically and manually from the control panel can be printed.

Menu List

You can print a Menu List showing the machine's function menus.

PCL Configuration / Font Page

You can print the current configuration and installed PCL font list.

PS Configuration / Font Page

You can print the current configuration and installed PostScript font list.

This menu can be selected only when an optional PostScript 3 unit is installed.

PDF Configuration / Font Page

You can print the current configuration and installed PDF font list.

This menu can be selected only when an optional PostScript 3 unit is installed.

Hex Dump

You can print in the Hex Dump mode.


Reference

• p.152 "Maintenance"

Printing the Configuration Page

This section describes how to print the configuration page.

- 1. Press the [User Tools/Counter] key.
- 2. Press [Printer Features].
- 3. Press [Configuration Page] on the [List / Test Print].



The configuration page is printed.

4. Press the [User Tools/Counter] key.

Interpreting the configuration page

This section describes the configuration page.

System Reference

• Machine ID

Displays the serial number assigned to the board by its manufacturer.

Total Memory

Displays the total amount of memory (SDRAM) installed on the machine.

Total Counter

Displays the total number of pages printed by the machine to date.

- Firmware Version
 - Printer

Displays the version number of the machine firmware.

• System

Displays the version number of the system firmware.

• Engine

Displays the version number of the machine engine.

LCDC

Displays the version number of the panel display.

NIB

Displays the version number of the Network interface.

Device Connection

This item(s) appears when the device option(s) is installed.

• HDD: Font/Macro Download

Displays the capacity of the hard disk drive.

• Printer Language

Displays the version number of the printer driver language.

Attached Equipment

Displays the installed optional equipments.

• Consumption Status

Displays the supply status.

Paper Input

Displays settings made under Tray Paper Settings menu.

Maintenance

Displays settings made under the Maintenance menu.

System

Displays settings made under the System menu.

PCL Menu

Displays settings made under PCL Menu.

PS Menu

Displays settings made under PS Menu.

PDF Menu

Displays settings made under PDF Menu.

Host Interface

Displays settings made under the Host Interface menu.

When DHCP is active on the network, the actual IPv4 address, subnet mask and gateway address appear in parentheses on the configuration page.

Interface Information

Displays the interface information.

Maintenance

This section describes the user tools in the Maintenance menu under Printer Features.

Menu Protect

You can prevent unauthenticated users from changing the user tools. Menu Protect can be specified for each of the following user tools menus.

For details, consult your administrator.

List / Test Print Lock

You can lock the [List / Test Print] items.

For details, consult your administrator.

Delete All Temporary Print Jobs

You can delete all print jobs temporarily stored in the machine.

Delete All Stored Print Jobs

You can delete all print jobs stored in the machine.

4 Colour Graphic Mode

• Text Priority

Use the optimum CMYK toner combination for text printing.

• Photo Priority

Use the optimum CMYK toner combination for photo printing.

Default: [Photo Priority]



To change default settings, see "Accessing User Tools".

Reference

• p.147 "Accessing User Tools"

System

This section describes the user tools in the System menu under Printer Features.

Print Error Report

Select this to have an error report printed when a printer or memory error occurs.

Default: [Off]

Auto Continue

Select whether or not the machine automatically continues to print after a system error occurs.

Default: [Off]

Memory Overflow

Select this to have a memory overflow error report printed.

Default: [Do not Print]

Job Separation

You can enable Job Separation.

This menu can be selected only when an optional finisher is installed.

Default: [Off]

Rotate by 180 Degrees

Specify whether to rotate the print image 180 degrees relative to the paper orientation.

Default: [Off]

Auto Delete Temporary Print Jobs

You can select to automatically delete print jobs temporarily stored in the machine.

Default: [Off]

If you select [On], you can set up to 200 hours for auto file deleting (Default: "8").

Auto Delete Stored Print Jobs

You can select to automatically delete print jobs stored in the machine.

Default: [On], "3" day(s)

If you select [On], you can set up to 180 days for auto file deleting.

Initial Print Job List

You can set the desired type of print job list that appears on the screen when you press [Print Jobs].

Default: [Complete List]

Complete List

Displays the list of print jobs stored in the machine.

List Per User ID

Displays the list of the User ID who stored a file in the machine.

Print Compressed Data

Specify whether to uncompress and extract compressed job data before printing it.

The supported compression format is GZIP.

Default: [Off]

Memory Usage

You can select the amount of memory used in Font Priority or Frame Priority, according to paper size or resolution.

Default: [Frame Priority]

Duplex

You can select to have print on both sides of each page.

Default: [Off]

Copies

You can specify the number of print sets. This setting is disabled if the number of pages to print has been specified with the printer driver or another command.

The number of copies can be specified from 1 to 9999 by increments of one.

Default: "1" copies

Blank Page Print

You can select whether or not to print blank pages.

Default: [On]

Pages that match one of the following conditions are identified as blank.

- There are no images.
- There are images but they are outside the printable area.
- There are only blank characters.

Spool Image

You can select to print spool images. The print job transmitted from the computer is temporarily stored on the machine's hard disk as bitmap images that can be printed when transmission is complete. If more than one print job is transmitted, a spool image is printed for each.

Default: [Off]

Reserved Job Waiting Time

You can specify how long the machine waits to receive a print job before allowing other functions such as the copier and scanner functions to interrupt it.

Default: [Short Wait]

Printer Language

Specify the printer language.

Default: [Auto]

Sub Paper Size

You can specify whether A4 or Letter ($8^{1}/_{2} \times 11$) size paper is automatically selected as the default size when the job-specified size is unavailable.

Default: [Auto]

Page Size

You can select the default paper size.

• The paper size you can select is as follows:

A3, A4, A5, A6, B4 JIS, B5 JIS, B6 JIS, 12×18 , 11×17 , $8^1/_2 \times 14$, $8^1/_2 \times 13$, $8^1/_2 \times 11$, $8^1/_4 \times 13$, 8×13 , $7^1/_4 \times 10^1/_2$, $5^1/_2 \times 8^1/_2$, 8K, 16K, Custom Size

Default: 220-240V A4, 110-127V / 208-240V $8^{1}/_{2}$ ×11

Letterhead Setting

You can rotate original images when printing.

When printing, original images are always rotated by 180 degrees. Therefore, output might not be as expected when printing onto letterhead or preprinted paper requiring orientation. Using this function, you can specify image rotation.

Default: [Auto Detect]

Off

When set to [Off], original images are always rotated by 180 degrees.

Auto Detect

When set to [Auto Detect], the machine detects a letterhead or preprinted paper automatically, and does not rotate the image.

• On (Always)

When set to [On (Always)], the machine does not rotate.

This function reduces printing speed.

Tray Setting Priority

You can specify which of the two options, [Driver / Command] or [Machine Settings], has priority for determining the paper size for each tray.

[LCT] appears only when LCT is installed.

Default: [Driver / Command] (bypass tray), [Machine Settings] (the other trays)

Edge to Edge Print

You can select whether or not to print on the entire sheet. This menu appears only when a PostScript 3 unit is installed.

Default: [Off]

Default Printer Language

You can set the default printer language if the machine cannot find the printer language automatically. This menu can be selected only when an optional PostScript 3 unit is installed.

Default: [PCL]

Tray Switching

You can specify whether or not the machine automatically switches paper trays if paper of the specified size and type is not loaded in the driver-designated tray.

Default: [Off]

Collate Settings

Set the default collate type if the machine cannot obtain the collate type information from the host computer.

Default: [Collate]

Staple Settings

Set the default staple type if the machine cannot obtain the staple type information from the host computer.

This menu appears only when a finisher is installed.

Default: [Off]

Punch Settings

You can set the default punch type if the machine cannot find the printer language automatically.

This menu appears only when a punch unit is installed.

Displayed items will differ depending on the finisher type, the original's orientation, the paper size, and the orientation type.

Default: [Off]

Extended Auto Tray Switching

You can select whether or not to automatically switch to a suitable tray when the current tray runs out of paper.

When [On] is set, the extended auto tray switching is priority, regardless of the printer driver settings.

When printing on tab stocks, [Extended Auto Tray Switching] setting is disabled.

Default: [Off]



• To change default settings, see "Accessing User Tools".

Reference

• p.147 "Accessing User Tools"

Host Interface

This section describes the user tools in the Host Interface menu under Printer Features.

I/O Buffer

You can set the size of the I/O Buffer. Normally it is not necessary to change this setting.

Default: [128 KB]

I/O Timeout

You can set how many seconds the machine should wait before ending a print job. If data from another port usually arrives in the middle of a print job, you should increase this timeout period.

Default: [15 seconds]



• To change default settings, see "Accessing User Tools".

■ Reference

• p.147 "Accessing User Tools"

PCL Menu

This section describes the user tools in the PCL Menu under Printer Features.

Orientation

You can set the page orientation.

Default: [Portrait]

Form Lines

You can set the number of lines per page.

The number of lines can be specified from 5 to 128 by increments of one.

Default: 220-240V "64" lines, 110-127V / 208-240V "60" lines

Font Source

You can set the storage location of the default font.

Default: [Resident]

[RAM], [HDD] and [SD] can be selected only when fonts have been downloaded to the machine.

Font Number

You can set the ID of the default font you want to use.

• When [Resident] is selected under [Font Source]:

The font number can be specified from 0 to 63 by increments of one.

Default: "0"

• When [RAM], [HDD], or [SD] is selected under [Font Source]:

The font number can be specified from 1 up to number of fonts stored on the machine.

Default: "1"

Point Size

You can set the point size you want to use for the selected font.

The number of point sizes can be specified from 4.00 to 999.75 by increments of 0.25.

This setting is effective only with variable-space fonts.

Default: "12.00" points

Font Pitch

You can set the number of characters per inch for the selected font.

The number of characters per inch can be specified from 0.44 to 99.99 by increments of 0.01.

This setting is effective only with fixed-space fonts.

Default: "10.00" pitches

Symbol Set

You can specify the character set of the selected font. The available options are as follows:

Roman-8, Roman-9, ISO L1, ISO L2, ISO L5, ISO L6, ISO L9, PC-775, PC-8, PC-8 D/N, PC-850, PC-852, PC-858, PC8-TK, PC-1004, Win L1, Win L2, Win L5, Win BALT, Desktop, PS Text, MS Publ, Math-8, PS Math, Pifont, Legal, ISO 4, ISO 6, ISO 11, ISO 15, ISO 17, ISO 21, ISO 60, ISO 69, Win 3.0, MC Text, UCS-2, PC-864, ARABIC-8, WIN-ARB, PC-866, PC-866U, ISO-CYR, WIN-CYR, PC-851, GREEK-8, ISO-GRK, PC8-GRK, WIN-GRK, PC-862, HEBREW 7, HEBREW 8, ISO-HEB

Default: [PC-8]

Courier Font

You can select a courier font type.

Default: [Regular]

Extend A4 Width

You can extend the printing area width (when printing on A4 sheet with PCL).

Default: [Off]

When the setting is [On], the width will be $8^{1}/_{2}$ inches.

Append CR to LF

When set to [On], a carriage return will follow each line feed: CR=CR, LF=CR-LF, FF=CR-FF.

Default: [Off]

Resolution

You can set the print resolution in dots per inch.

Default: [600 dpi (Standard)]



• To change default settings, see "Accessing User Tools".

■ Reference

• p.147 "Accessing User Tools"

PS Menu

This section describes the user tools in the PS Menu under Printer Features.

This menu appears only when an optional PostScript 3 unit is installed.

Job Timeout

You can specify how long the printer waits (in seconds) before canceling the current job when the job is interrupted while being processed.

Default: [Use Driver / Command]

If you select [Use Machine Settings], enter a value between 0 and 999.

Default: "0"

When set to "0", the current job will not be canceled when interrupted.

Wait Timeout

You can specify how long the printer waits (in seconds) before it cancels receiving the job when the printer cannot detect the end of the job.

Default: [Use Driver / Command]

If you select [Use Machine Settings], enter a value between 0 and 999.

Default: "300"

When set to "0", the print job will not be canceled when the end of the job cannot be detected.

Data Format

You can select a data format.

Default: [TBCP]

This setting is not effective when operating the machine with a parallel or EtherTalk connection.

When operating the machine with a parallel connection, and also if the binary data is sent from the printer driver, the print job is canceled.

When operating the machine with an Ethernet connection, the print job is canceled under the following conditions:

- The printer driver data format is TBCP, and the data format selected on the display panel is [Binary Data].
- The printer driver data format is binary, and the data format selected on the display panel is [TBCP].

Resolution

You can set the print resolution in dots per inch.

Default: [600 dpi (Standard)]

Colour Setting

You can make an RGB setting.

Default: [Super Fine]

Colour Profile

You can set the color profile.

Default: [Auto]

Process Colour Model

Specify the color model.

Default: [Colour]

Orientation Auto Detect

You can specify whether or not the machine automatically detects the print orientation of received images.

If you select [On], the machine detects the orientation (Portrait/Landscape) of the received image and automatically applies the correct print orientation.

Default: [On]



• To change default settings, see "Accessing User Tools".

Reference

• p.147 "Accessing User Tools"

PDF Menu

This section describes the user tools in the PDF Menu under Printer Features.

This menu appears only when an optional PostScript 3 unit is installed.

Change PDF Password

You can set the password for the PDF file printed using PDF Direct Print.

- Current Password
 - New Password
 - Confirm New Password

[New Password] and [Confirm New Password] appear only when [Current Password] is set.

A password can be also set using Web Image Monitor, but in this case the password information is sent through the network. If security is a priority, set the password using this menu from the control panel.

PDF Group Password

This menu appears only when an optional HDD encryption unit is installed. This setting is not available on this machine.

Reverse Order Printing

You can specify whether the machine automatically prints in reverse order.

Default: [Off]

Resolution

You can set the print resolution in dots per inch.

Default: [600 dpi (Standard)]

Colour Setting

You can make an RGB setting.

Default: [Super Fine]

Colour Profile

You can set the color profile.

Default: [Auto]

Process Colour Model

Specify the color model.

Default: [Colour]

Orientation Auto Detect

You can specify whether or not the machine automatically detects the print orientation of received images.

If you select [On], the machine detects the orientation (Portrait/Landscape) of the received image and automatically applies the correct print orientation.

Default: [On]



• To change default settings, see "Accessing User Tools".

Reference

• p.147 "Accessing User Tools"

7. Appendix

Using the Virtual Printer

This section explains the virtual printer function.

The virtual printer is a pseudo printer that can only be recognized on a network. The virtual printer has various print options, such as feeding tray selection and duplex printing, which you can set in advance. You can also use the interrupt printing function. This function suspends the ongoing job and gives priority to a new job. If you use the virtual printer under UNIX, Solaris, and other operating systems, various print functions are possible without you having to manually enter the usual print commands.

Adding a Virtual Printer

Use this procedure to add a virtual printer.

Mportant (

- Adding a virtual printer requires Administrators privilege. Log on using an account that has Administrators privilege.
- The following Virtual Printer protocols are available: "TCP/IP (Unspecified, Normal)", "TCP/IP (Unspecified, Priority) ", "TCP/IP (DIPRINT)", "TCP/IP (RHPP)", "AppleTalk", and "NetWare".
- 1. Log on to Web Image Monitor as an administrator.
 - For details about login user names and passwords, see "Using Web Image Monitor", Network and System Settings Reference.
- In the menu area, click [Configuration], and then click [Virtual Printer Settings] in the "Printer" category.

A list of the available virtual printers appears.

3. Click [Add].

The screen for adding virtual printers appears.

- 4. In [Virtual Printer Name], enter a name for the new printer, and then select the protocol in the [Protocol] list.
- 5. Click [OK].

The virtual printer is added.



- [AppleTalk] appears only when a PostScript 3 unit is installed.
- If you select [AppleTalk] or [NetWare] in the [Protocol] list, you cannot specify a virtual printer name.
- You can specify a virtual printer name using up to 47 characters.

Changing a Virtual Printer Configuration

Use this procedure to change a virtual printer configuration.



- You must have Administrators privilege to change the configuration of a virtual printer. Log on using an account that has Administrators privilege.
- 1. Log on to Web Image Monitor as an administrator.

For details about login user names and passwords, see "Using Web Image Monitor", Network and System Settings Reference.

2. In the menu area, click [Configuration], and then click [Virtual Printer Settings] in the "Printer" category.

A list of the available virtual printers appears.

- 3. Select the virtual printer whose configuration you want to change, and then click [Change].
 If you want to configure this virtual printer for an interrupt printer, select [TCP/IP (Unspecified, Priority)] in the protocol list.
- 4. Change the configuration as required.
- 5. Click [OK].



• For details about virtual printer configuration, see Web Image Monitor Help.

Confirming a Virtual Printer Configuration

Use this procedure to confirm a virtual printer configuration.

- 1. Start Web Image Monitor.
- 2. In the menu area, click [Configuration], and then click [Virtual Printer Settings] in the "Printer" category.

A list of available virtual printers appears.

3. Select the virtual printer whose configuration details you want to confirm, and then click [Details].

A configuration list for the selected virtual printer appears.



- [Details] is not displayed if you log on to Web Image Monitor as an administrator. To confirm the current virtual printer configuration, click [Change].
- If the virtual printers function is set to [Inactive] in [Virtual Printer], the list of available virtual printers is not displayed. Set the virtual printers function to [Active]. To set the virtual printers function to [Active], you must logon as an administrator. For details, see "Printing Using a Virtual Printer".



• p.167 "Printing Using a Virtual Printer"

Deleting a Virtual Printer

Use this procedure to delete a virtual printer.

- 1. Log on to Web Image Monitor as an administrator.
 - For details about login user names and passwords, see "Using Web Image Monitor", Network and System Settings Reference.
- In the menu area, click [Configuration], and then click [Virtual Printer Settings] in the "Printer" category.

The list of available virtual printers appears.

- 3. Select the virtual printer that you want to delete, and then click [Delete].
 - The delete confirmation screen appears.
- 4. Click [OK].



- You cannot delete the default virtual printer.
- [Delete] appears only if you have already added a virtual printer.

Printing Using a Virtual Printer

To print directly from a specified virtual printer, assign the virtual printer in the print command. If you use the interrupt printing function, enter the name of the virtual printer that you configured for interrupt printing. Before printing for the first time, specify the virtual printer you want to use.

- 1. Log on to Web Image Monitor in administrator mode.
 - For details about login user name and password, see "Using Web Image Monitor", Network and System Settings Reference.
- 2. In the menu area, click [Configuration], and then click [Printer Basic Settings] in the "Printer" category.

- .
- 4. Send a command from your computer.

3. Select [Active] in [Virtual Printer], and then click [OK].

lpr

 $\hbox{$\tt C:\\tt P''Virtual Printer Name"] [-ol] \P address" $\tt P''Virtual Printer Name"] $\tt P''Virtual Printer Name" $$

rcp

c:> rcp [-b] \path\file name [\path\file name...] printer's host name:["Virtual
Printer Name"]

ftp

ftp> put \path\ file name [Virtual Printer Name]

Specifications

This section contains the machine's electrical and hardware specifications, including information about its options.

Component	Specifications
Resolution	200dpi/300dpi/400dpi/600dpi/1200dpi
Printing speed	Type 1:
	• Color: 60 ppm
	• B&W: 65 ppm
	Type 2:
	• Color: 70 ppm
	• B&W: 75 ppm
	$(A4^{\square}, 8^{1}/_{2}" \times 11"^{\square}, plain paper)$
	Printing speeds depend on the machine.
Interface	Standard:
	Ethernet interface (100 BASE-TX/10 BASE-T)
	• USB 2.0
	Option:
	Gigabit Ethernet interface (1000BASE-T/100BASE- TX/10BASE-T)
	IEEE 1284 parallel interface
	• IEEE 802.11a/b/g wireless LAN interface
	Bluetooth interface
Network protocol	TCP/IP(IPv4, IPv6), IPX/SPX, AppleTalk
Printer language	Standard:
	• PCL 5c/6, RPCS
	Optional:
	PostScript 3, PDF

Component	Specifications
Fonts	Standard:
	PCL 5c/6: 45 fonts, 13 International fonts
	Arial 4 fonts
	Optional:
	PCL 5c/6: OCR, Barcode fonts
	PostScript 3: 136 fonts
Memory	2 GB
Hard disk	Storage capacity: 160 GB × 2
USB Interface (Standard)	Transmission spec:
	USB 2.0 Standard
	Connectable Device:
	Devices corresponding to USB 2.0 Standard
Supported Operating System	Standard:
	 Windows 2000/XP/Vista, Windows Server 2003/2003 R2/2008
	Optional:
	Mac OS X 10.2 or higher



- When resolution is 1200 dpi, printing speed may be slower.
- When using the Mac OS X operating system, use only the standard USB Interface. An optional USB interface board is not supported.
- When using the USB Interface (Standard) with Mac OS X 10.3.3, USB 2.0 is supported.

Trademarks

Adobe, Acrobat, Acrobat Reader, PageMaker, PostScript, and Reader are either registered trademarks or trademarks or trademarks of Adobe Systems Incorporated in the United States and/or countries.

AppleTalk, EtherTalk, Macintosh, and Mac OS X are registered trademarks of Apple Inc, registered in the U.S. and other countries.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Ricoh Company, Ltd is under license.

IPS is a trademark or registered trademark of Zoran Corporation and/or its subsidiaries in the United States or other countries.

Linux[®] is the registered trademark of Linus Torvalds in the U.S. and other countries.

Microsoft[®], Windows[®], Windows Server[®], and Windows Vista[®] are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Monotype is a registered trademark of Monotype Imaging, Inc.

NetWare, IPX, IPX/SPX are either registered trademarks or trademarks of Novell, Inc.

PCL® is a registered trademark of Hewlett-Packard Company.

UNIX is a registered trademark of The Open Group.

Other product names used herein are for identification purposes only and might be trademarks of their respective companies. We disclaim any and all right to those marks.

The proper names of the Windows operating systems are as follows:

• The product names of Windows 2000 are as follows:

Microsoft® Windows® 2000 Professional

Microsoft® Windows® 2000 Server

Microsoft® Windows® 2000 Advanced Server

• The product names of Windows XP are as follows:

Microsoft® Windows® XP Professional

Microsoft® Windows® XP Home Edition

Microsoft® Windows® XP Media Center Edition

Microsoft® Windows® XP Tablet PC Edition

• The product names of Windows Vista are as follows:

Microsoft® Windows Vista® Ultimate

Microsoft® Windows Vista® Business

Microsoft® Windows Vista® Home Premium

Microsoft® Windows Vista® Home Basic

Microsoft® Windows Vista® Enterprise

- The product names of Windows Server 2003 are as follows:
 Microsoft® Windows Server® 2003 Standard Edition
 Microsoft® Windows Server® 2003 Enterprise Edition
- The product names of Windows Server 2003 R2 are as follows: Microsoft[®] Windows Server[®] 2003 R2 Standard Edition Microsoft[®] Windows Server[®] 2003 R2 Enterprise Edition
- The product names of Windows Server 2008 are as follows:
 Microsoft[®] Windows Server[®] 2008 Standard
 Microsoft[®] Windows Server[®] 2008 Enterprise

INDEX

	Derauit Printer Language13
4 Colour Graphic Mode152	Default settings45, 47, 142
4 Colour Grapine Mode132	Delete All Stored Print Jobs152
A	Delete All Temporary Print Jobs152
About This Machine5	DeskTopBinder Lite139, 14
Accessing User Tools147	Function Palette140
Advanced printing70	Display panel103
Append CR to LF158	Document Server14
Auto Continue	Downloading the printer driver12
Auto Delete Stored Print Jobs	Duplex153
Auto Delete Temporary Print Jobs	Duplex printing64
B	E
	Edge to Edge Print153
Banner page	Envelopes48
Bidirectional communication41	Error Log136, 14
Blank Page Print	Extend A4 Width158
Bypass tray	Extend Auto Tray Switching153
OHP transparencies	F
C	Fold
Canadina a job	Folding positions80
Canceling a job	Folding precautions8
Change RDE Resourced	Font Manager
Change PDF Password	Font Number
Changing the port setting28	Font Pitch
Chapter page87	Font Source
Checking the machine's status150	Form feed
Classification code	Form Lines
Collate71	Frequently used print methods
Collate Settings	rrequently used print methods
Colour Profile	Н
Colour Setting160, 162	Hex Dump149
Combining multiple pages into single page66	Hold Print117
Configuration Page149	How to read this manual
Continuing printing manually95	
Copies153	
Copy and Document Server Reference5	I/O Buffer157
Copy speed8	I/O Timeout157
Courier Font158	Initial display103
Cover sheet84	Initial Print Job List106, 153
Custom size paper48	Installing the printer driver
D	Installing the printer driver using LPR port22
Data Format160	Installing the printer driver using SmartDeviceMonitor for Client port2

Installing the printer driver using standard TCP/IP port	•	
Installing the printer driver using USB35	1 1010	
Installing the printer driver using WSD port24	1 101100	7
Interrupt printing165		
IPP		10
	One click presets	
IPP port21	Orientation	
J	Orientation Auto Detect	
Job list129		•
change order	Other manuals	3
checking jobs130	P	
deleting jobs132	Page Size	153
job history132	PageMaker	
Job Separation153	Paper sizes for stapling	
Job timeout160	Parallel connection	
L	PCL 5c printer driver	
	DCI Cantinuantian / Fant Dans	
Laws and regulations10	DCI maintan alaissa	
Legal prohibition10	מסב כי יי / ב י מ	
Letterhead60	DDE Ding at Daint	
Letterhead Setting153	Function Palette	
List / Test Print149	usina commands	
List / Test Print Lock152	PDE Group Password	
List Per User ID125	PDF password	
printing all print jobs126	Point Sizo	
Local connection13	PostScript 3 printer driver	
Locked Print114	PostScript 3 Supplement	
M	Print Compressed Data	
A4 1:		
Making option settings	Print Job Function	
Making paper settings		
Maximum numbers of sheets for stapling74		
Memory Overflow153		
Memory Usage153		
Menu List149	_	
Menu Protect152		
Models		
Multiple Lists149		
N	Printing print jobs	
NI f : "	Printing using the bypass tray	
Names of major items8		
NetWare		
Network and System Settings Reference5		77
Network connection13	Punch position	77

Punch Settings
Punching precautions78
Q
Quick Install18
R
Remote printer32
Reserved Job Waiting Time153
Resetting the printer34
Resolution158, 160, 162
Reverse Order Printing162
Ring binding83
Ring binding precautions84
Rotate by 180 Degrees153
S
Sample Print111
Scanner Reference
Security Reference5
Sending a PDF file144
Simplified display104
Slip sheets89
SmartDeviceMonitor for Client28
Specifications169
Spool Image153
Spool printing97
Standard printing62
Staple position74
Staple printing73
Staple Settings153
Store and Print (Shared)120
Stored Print120
Stored Print (Shared)120
Sub Paper Size153
Symbol Set158
Symbols8
T
TCP/IP25
Thick Paper48
Thin Paper48
Trademarks171
Tray Setting Priority153

Tray Switching Troubleshooting	
U	
USB connection	35
V	
Virtual printer	165
W	
Wait Timeout	
Watermarks	91
Web Image Monitor	99, 165

MEMO

