

9240/9250 MP 4001/MP 5001 *LD140/LD150* Aficio[™] MP 4001/5001

Operating Instructions Scanner Reference



- **1** Sending Scan Files by E-mail
- 2 Sending Scan Files to Folders
- 3 Storing Files Using the Scanner Function
- 4 Delivering Scan Files
- 5 Scanning Originals with the Network TWAIN Scanner
- 6 Various Scan Settings
 - 7) Appendix

Read this manual carefully before you use this machine and keep it handy for future reference. For safe and correct use, be sure to read the Safety Information in "About This Machine" before using the machine.

Introduction

This manual contains detailed instructions and notes on the operation and use of this machine. For your safety and benefit, read this manual carefully before using the machine. Keep this manual in a handy place for quick reference.

Important

Contents of this manual are subject to change without prior notice. In no event will the company be liable for direct, indirect, special, incidental, or consequential damages as a result of handling or operating the machine.

Notes:

Some illustrations in this manual might be slightly different from the machine.

Certain options might not be available in some countries. For details, please contact your local dealer. Depending on which country you are in, your machine may include certain options as standard. For details, please contact your local dealer.

Caution:

Use of controls or adjustments or performance of procedures other than those specified in this manual might result in hazardous radiation exposure.

Two kinds of size notation are employed in this manual. With this machine refer to the inch version.

Manuals for This Machine

Read this manual carefully before you use this machine.

Refer to the manuals that are relevant to what you want to do with the machine.

🔂 Important

- Media differ according to manual.
- The printed and electronic versions of a manual have the same contents.
- Adobe Acrobat Reader/Adobe Reader must be installed in order to view the manuals as PDF files.
- A Web browser must be installed in order to view the html manuals.

About This Machine

Before using the machine, be sure to read the section of this manual entitled Safety Information.

This manual provides an introduction to the functions of the machine. It also explains the control panel, preparation procedures for using the machine, how to enter text, and how to install the CD-ROMs provided.

Troubleshooting

Provides a guide to solving common problems, and explains how to replace paper, toner, staples, and other consumables.

Copy/ Document Server Reference

Explains Copier and Document Server functions and operations. Also refer to this manual for explanations on how to place originals.

Facsimile Reference

Explains Facsimile functions and operations.

Printer Reference

Explains Printer functions and operations.

Scanner Reference

Explains Scanner functions and operations.

Network Guide

Explains how to configure and operate the machine in a network environment, and use the software provided.

General Settings Guide

Explains User Tools settings, and Address Book procedures such as registering fax numbers, e-mail addresses, and user codes. Also refer to this manual for explanations on how to connect the machine.

Security Reference

This manual is for administrators of the machine. It explains security functions that you can use to prevent unauthorized use of the machine, data tampering, or information leakage. For enhanced security, we recommend that you first make the following settings:

- Install the Device Certificate.
- Enable SSL (Secure Sockets Layer) Encryption.
- Change the user name and password of the administrator using Web Image Monitor.

For details, see "Setting Up the Machine", Security Reference.

Be sure to read this manual when setting the enhanced security functions, or user and administrator authentication.

PostScript 3 Supplement

Explains how to set up and use PostScript 3.

Information

Contains general notes on the machine, and information about the trademarks of product names used in the manuals.

Other Manuals

- UNIX Supplement
- Extended Feature Settings Reference <Device Version>
- Extended Feature Settings Reference <Web Version>
- App2Me Start Guide

Note

- Manuals provided are specific to machine types.
- For "UNIX Supplement", please visit our Web site or consult an authorized dealer. This manual includes descriptions of functions and settings that might not be available on this machine.
- The following software products are referred to using general names:

Product name	General name
DeskTopBinder Lite and DeskTopBinder Professional ^{* 1}	DeskTopBinder
ScanRouter EX Professional ^{*1} and ScanRouter EX Enterprise ^{*1}	the ScanRouter delivery software

*1 Optional

TABLE OF CONTENTS

Manuals for This Machine	1
How to Read This Manual	8
Symbols	8
About the Scanner Functions	9
Display Panel	11
Simplified Display	11
Confirmation Displays	12
Preview	14
Scanned Files Status	15
1. Sending Scan Files by E-mail	
Before Sending Scan Files by E-mail	19
Outline of Sending Scan Files by E-mail	19
Preparation for Sending by E-mail	20
Registering E-mail Addresses in the Address Book	21
E-mail Screen	22
Basic Operation for Sending Scan Files by E-mail	24
Switching to the E-mail Screen	27
Specifying E-mail Destinations	28
Selecting the Destination from the Machine's Address Book	
Entering an E-mail Address Manually	31
Selecting Destinations by Searching an LDAP Server	32
Registering a Directly-Entered Destination in the Address Book	35
Specifying the E-mail Sender	37
Selecting a Sender from the List	37
Using a Registration Number to Specify a Sender Name	
Selecting the Sender by Searching the Machine's Address Book	
Specifying the E-mail Subject	41
Specifying the E-mail Message	42
Selecting a Message from the List	42
Manual Entry of a Message	43
Simultaneous Storage and Sending by E-mail	44
Security Settings to E-mails	45
Sending Encrypted E-mail	45

Sending E-mail with a Signature				
Sending the URL by E-mail				
2. Sending Scan Files to Folders				
Before Sending Files by Scan to Folder	51			
Outline of Sending Scan Files by Scan to Folder	51			
Preparation for Sending by Scan to Folder	53			
Registering Destination Folders in the Address Book	54			
Scan to Folder Screen	55			
Basic Operations When Using Scan to Folder	57			
Switching to the Scan to Folder Screen				
Specifying Scan to Folder Destinations	60			
Selecting the Destination from the Machine's Address Book	60			
Sending Files to a Shared Network Folder	64			
Sending Files to an FTP Server	67			
Sending Files to NetWare Server	68			
Registering the Path to the Selected Destination in the Address Book	72			
Simultaneous Storage and Sending by Scan to Folder	73			
3. Storing Files Using the Scanner Function				
Before Storing Files	75			
Outline of File Storage under the Scanner Function	75			
Basic Operation for Storing Scan Files	77			
Specifying File Information for a Stored File	79			
Specifying a User Name	79			
Specifying a File Name	79			
Specifying a Password	80			
Displaying the List of Stored Files	82			
List of Stored Files	82			
Searching the List of Stored Files	83			
Checking Stored Files	85			
Checking a Stored File Selected from the List	85			
Checking Stored Files from a Client Computer	86			
Sending a Stored File				
Sending Stored Files				

Managing Stored Files	90
Deleting a Stored File	90
Changing Information for a Stored File	
4. Delivering Scan Files	
Before Delivering Files	95
Outline of Scan File Delivery	
Preparing to Deliver Files	96
Network Delivery Scanner Screen	
Basic Operation for Delivering Files	
Switching to the Network Delivery Scanner Screen	
Specifying Delivery Destinations	
Selecting Destinations Registered in the Delivery Server's Address Book	
Specifying the Sender	
Selecting a Sender from the Sender List	
Selecting the Sender by Entering the Registration Number	107
Selecting a Sender by Searching the Delivery Server's Destination List	
Specifying the Subject of the E-mail to Be Transmitted via the Delivery Server	
Simultaneous Storage and Delivery	
5. Scanning Originals with the Network TWAIN Scanner	
Before Using the Network TWAIN Scanner	113
Outline of the Network TWAIN Scanner	
Preparing to Use the Network TWAIN Scanner	
Installing the TWAIN Driver from the Supplied CD-ROM	115
Basic Network TWAIN Scanner Operation	117
6. Various Scan Settings	
Scan Settings	
Items for Specifying Scan Settings	
Scan Type	
Resolution	
Scan Size	121
Edit	127
Adjusting Image Density	
Setting of Original Feed Type	

Original Orientation	129
Original Settings	130
Stamp	132
Batch, SADF	133
Divide	134
Scanning Multiple Pages of Originals as One File	136
Specifying the File Type and File Name	138
Specifying the File Type	138
Notes About and Limitations of File Types	139
Specifying the File Name	140
Security Settings to PDF Files	142
Programs	147
Registering Frequently Used Setting	147
Recalling a Registered Content	148
Changing a Registered Program	148
Deleting a Program	149
Changing the Registered Program Name	149
Registering the Default Values of the Scanner's Initial Display	151
Scan Settings When Using TWAIN Scanner	153
Setting Original Orientation on the TWAIN Scanner	153
When Scanning Originals of Mixed Sizes Using TWAIN Scanner	155
7. Appendix	
Relationship between Resolution and Scan Size	157
When Using the E-mail, Folder Sending, Storing, or Network Delivery Functions	157
When Using as a TWAIN Scanner	158
Software Supplied on CD-ROM	159
Auto-Run Program	159
TWAIN Driver	159
Values of Various Set Items for Transmission/Storage/Delivery Function	160
Transmission Function	160
Storage Function	162
Network Delivery Function	
Scanner Features	165

Specifications	168
INDEX	171

How to Read This Manual

Symbols

This manual uses the following symbols:

🚼 Important

Indicates points to pay attention to when using the machine, and explanations of likely causes of paper misfeeds, damage to originals, or loss of data. Be sure to read these explanations.

Note

Indicates supplementary explanations of the machine's functions, and instructions on resolving user errors.

Reference

This symbol is located at the end of sections. It indicates where you can find further relevant information.

[]

Indicates the names of keys on the machine's display or control panels.

About the Scanner Functions

This section describes functions you can use in the scanner mode.

You can use the scanner functions to send scan files to computers, scan originals from a computer using the TWAIN driver, or store scan files on the machine's hard disk.

For details about each function, see respective chapters.

Sending scanned files (Network Scanner)

Scan files can be sent to or stored on a computer, and you can specify the format of a scan file according to how the file will be used.

• Sending by e-mail

You can send scan files to a specified e-mail addresses.

For details, see chapter 1 "Sending Scan Files by E-mail".

Sending to folders

Scan files can be stored in shared network folders, or on FTP or Netware servers.

For details, see chapter 2 "Sending Scan Files to Folders".

• Delivering

You can deliver scan files using a delivery server.

For details, see chapter 4 "Delivering Scan Files".

Scanning originals from a client computer (TWAIN Scanner)

You can use the TWAIN driver to scan files from a networked or directly connected computer.

For details, see chapter 5 "Scanning Originals with the Network TWAIN Scanner".

Storing files

Scan files can be stored on the machine's hard disk. You can do various things with stored files, such as save them in shared folders or send them by e-mail.

For details, see chapter 3 "Storing Files Using the Scanner Function".

Note

• When the Copy Data Security Unit is installed, if you scan an original that was printed using the data security for copying function, the machine beeps and an entirely gray page is sent or stored. You can use the log file to check who scanned the confidential original. For details about the data security for copying function, consult the administrator.

E Reference

- p.19 "Sending Scan Files by E-mail"
- p.51 "Sending Scan Files to Folders"
- p.95 "Delivering Scan Files"

- p.113 "Scanning Originals with the Network TWAIN Scanner"
- p.75 "Storing Files Using the Scanner Function"

Display Panel

This section explains the simplified display and three confirmation screens: Check Modes, Preview, and Transmission File Status.

You can find explanations about the E-mail screen, Scan to Folder screen, list of stored files screen, or network delivery scanner screen in this manual. For details, see "E-mail Screen", "Scan to Folder Screen", "List of Stored Files", and "Network Delivery Scanner Screen".

Reference


- p.22 "E-mail Screen"
- p.55 "Scan to Folder Screen"
- p.82 "List of Stored Files"
- p.97 "Network Delivery Scanner Screen"

Simplified Display

This section explains how to switch to the simplified display.


When you press the [Simplified Display] key, the screen changes from the initial display to the simplified display.

Letters and keys are displayed at a larger size, making operations easier.



BAP041S

Example of Simplified Display

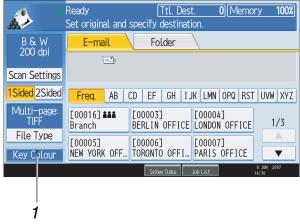

BAP001S

1. [Key Colour]

Press to increase screen contrast by changing the color of the keys. This is available only for the simplified display.

Note

- To return to the initial screen, press the [Simplified Display] key again.
- Certain keys do not appear on the simplified display.

Confirmation Displays

This section explains three confirmation displays: Check Modes, Preview and Transmission File Status.

Check Modes


This section explains items that are displayed and how to display the Check Modes screen.

Use the Check Modes screen to check scanning and transmission settings.

Pressing [Check Modes] switches the screen from the initial scanner screen to the Check Modes screen.

Store File Scanned Files Status Check Modes						ck Modes		
Se	arch De	st, De	livery De	st.	Previe	w	Ttl. De	
tinatio	n.							0 100%
				E	-mail /	Address:	0	
						Prg	. Dest.	
					To		Cc	Boc
EF	GH	IJK	LMN	0P0	RST	UW	XYZ	Change Title
[0000]	IN OCC	C00004) IN OFF	[00005] NEWYO		C000043 TORONT	0.05	1/2

Check Modes

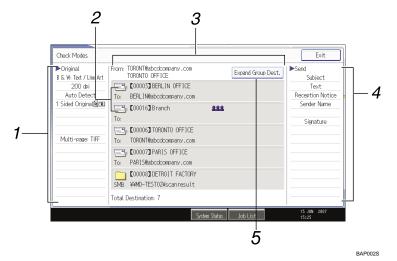

1. Original

Displays Scan Settings, Original Feed Type, and other scanning settings.

2. Transmission function icon

Displays the icon of the transmission function in use.

3. Sender and Destination

Displays the sender and transmission or delivery destinations.

The (**&&&**) symbol indicates a group destination.

The (🗒) symbol indicates a destination that can receive encrypted e-mail.

4. Send

Displays transmission settings such as Sender and Subject.

5. [Expand Group Dest.]

Press to display the members of the group, when a group is specified as the destination.


Preview

Use the Preview screen to check that originals have been scanned correctly.

This section explains about the Preview screen that can be used before sending files by e-mail or Scan to Folder, or delivering files.

Before you start scanning, press [Preview]. If you scan originals while [Preview] is selected, the Preview screen appears. You can start or cancel sending the files after checking the preview and the scan settings used for scanning.

Preview

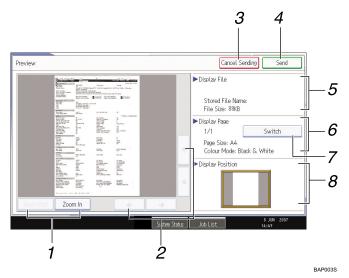

1. [Zoom Out] and [Zoom In]

Press to reduce or enlarge the displayed preview.

2. [←][→][↑][←]

Press to shift the displayed area.

3. [Cancel Sending]

Press to close a preview and interrupt a transmission.

4. [Send]

Press to close a preview and continue a transmission.

5. Display File

Displays a file's name and size.

6. Display Page

Displays the number of the currently displayed page, total number of pages, page size, and color mode.

7. [Switch]

Press to change the page of the selected file that is displayed.

8. Display Position

Displays the position of an image when enlarged.

Note

- Preview is not available if a file is scanned using [Store Only].
- You can view a stored file using the Preview screen displayed from the list of stored files. For details about viewing a stored file, see "Checking a Stored File Selected from the List".
- Preview is not available if you select High Compression PDF as the file type.
- Preview might not be displayed if scanning failed or the image file is corrupted. If this is the case, scan the original again.

Reference

• p.85 "Checking a Stored File Selected from the List"

Scanned Files Status

This section explains items that are displayed and how to display the Scanned Files Status screen.


Use the Scanned Files Status screen to check e-mail transmission, Scan to Folder, and delivery results.

Press [Scanned Files Status] to display the Scanned Files Status screen.

Store File Scanned Files Status						Che	ck Modes	
Se	arch De	st, De	livery De	st.	t. Preview 🕅 🕬			
tinatio	n.							0 100%
				E	-mail A	\ddress:		
						Prg	. Dest	
					To		Cc	Boc
EF	GH	IJK	LMN	0P0	RST	UWH	XYZ	Change Title
E 0000 BERL ICE	sa .IN OFF	LOND	a ON OFF	CODODS) NEWYO FICE		CONNUM	'0 OF	1/2

Up to 9 transmission or delivery results are displayed at the same time. Press [▲] or [▼] to switch between results.

Scanned Files Status

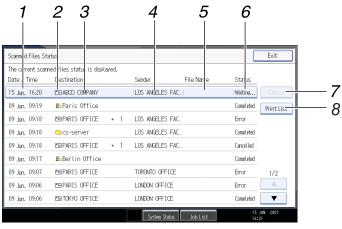

BAP004S

1. Date/Time

Displays the time and date transmission was specified by this machine or the time and date when Completed, Error, or Cancelled was confirmed.

2. Transmission function icon

Displays the icon of the transmission function used.

The () symbol indicates a destination that can receive encrypted e-mail.

3. Destination

Displays the transmission destination.

If you have selected multiple destinations, the first selected destination is displayed.

Other destinations appear as "+ X" (X indicates the number of destinations.) when sending files by e-mail or delivering them.

4. Sender

Displays the sender name.

5. File Name

Displays the stored file name of files that are simultaneously sent and stored, or of stored files that are sent.

6. Status

Displays one of the following transmission statuses: Completed, Trnsmtg., Waiting..., Error, or Cancelled.

7. [Cancel]

To cancel transmission, select a file whose status is "Waiting...", and then press [Cancel].

8. [Print List]

Press to print transmission results.

Vote

- You cannot check scanner function transmission results by pressing [Job List] at the bottom of the screen. To check transmission results, press [Scanned Files Status], and then display the Scanner File Status screen.
- Depending on security settings, some transmission results might not be displayed.


1. Sending Scan Files by E-mail

Before Sending Scan Files by E-mail

This section explains the necessary preparations and the procedure for sending scan files by e-mail.

Outline of Sending Scan Files by E-mail

This section outlines the function for sending scan files by e-mail.

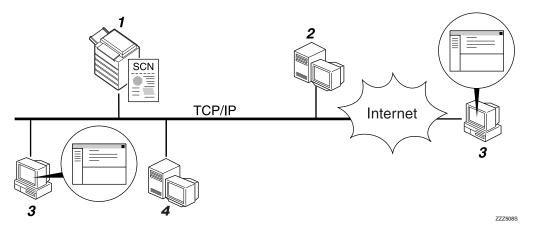

1. This machine

You can attach scan files to e-mail and send them to a mail server. You can also encrypt and/or attach a signature to the scan files you send by e-mail.

2. SMTP server

You need to have an access to an e-mail server that supports SMTP (Simple Mail Transfer Protocol), to send scan files by e-mail. However, it is not essential to have an e-mail server inside the LAN where this machine belongs. It transfers a received e-mail to a specified destination through a LAN or the Internet.

3. Client computer

Use e-mail client software to receive e-mail messages and scan file attachments that are generated by this machine.

4. LDAP Server

Use this server for administering e-mail accounts, searching the network, and authenticating the computers that access the machine. Using the LDAP server, you can search for destinations from the machine.

🕗 Note

• This machine does not support SMTPS (SMTP over SSL).

Preparation for Sending by E-mail

To send scanned files by e-mail, you must first perform the following:

- Check the machine is properly connected to the network
- Configure the network settings in [System Settings]
- Configure the necessary settings in [Scanner Features]

This section explains each of these steps and where you can find more information about them.

Check the machine is properly connected to the network

Check that this machine is properly connected to the network.

For details about how to connect this machine to a network, see "Connecting to the Interfaces", General Settings Guide.

Configure the network settings in [System Settings]

Configure the network settings in [System Settings] according to your environment and how you will be using the machine.

The following procedure explains connecting this machine to an IPv4 network using Ethernet cable.

Note that the settings you must configure will vary depending on your operating environment. For details about network settings and configuration procedures, see "Network Settings Required to Use E-mail Function", General Settings Guide.

1. Press the [User Tools/Counter] key, and then press [System Settings].

The System Settings screen appears.

- 2. Press the [Interface Settings] tab.
- 3. Press [Machine IPv4 Address] to specify the machine's IPv4 address.

To specify a static IPv4 address for this machine, press [Specify], and then enter the IPv4 address and subnet mask.

To obtain an IPv4 address from a DHCP server automatically, press [Auto-Obtain (DHCP)].

- 4. Press [IPv4 Gateway Address], and then enter the IPv4 gateway address.
- 5. Press [Effective Protocol], and then make [IPv4] active.
- 6. Press the [File Transfer] tab, and then press [SMTP Server].
- 7. Press [Change], which is to the right of [Server Name], then enter the SMTP server host name or IPv4 address, and then press [OK].

If necessary, you can change the number by pressing [Change], which is to the right of the port number.

8. Press [Exit] twice.

1

Configure the necessary settings in [Scanner Features]

Using [Scanner Features], you can make or change various settings related to the scanner function, such as compressing scan data or viewing the scanner journal. Configure the scanner settings according to your environment and how you will be using the machine.

This section explains how to display the Scanner Features screen. For details about the settings on this screen, see "Scanner Features", General Settings Guide.

- 1. Press the [User Tools/Counter] key.
- 2. Press [Scanner Features].

The Scanner Features screen appears.

Press the [General Settings], [Scan Settings], [Send Settings], or [Initial Settings] tabs and configure the relevant settings on those tabs.

Note

- If an extended wireless LAN board (optional) is installed, press [LAN Type] on the [Interface Settings] tab, then press [Ethernet], and then configure the network settings.
- The settings you must configure in [System Settings] vary depending on your network environment. For details about network settings, see "Connecting the Machine", General Settings Guide.

Reference

• p.165 "Scanner Features"

Registering E-mail Addresses in the Address Book

You can register frequently used e-mail addresses in the address book.

Register e-mail addresses in [Address Book Management] under [Administrator Tools] from [System Settings]. Addresses can also be registered as groups.

Note

- For details about registering e-mail addresses in the address book, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Settings Guide.
- You can also register e-mail addresses in the address book using Web Image Monitor. For details about how to display Web Image Monitor, see "Monitoring and Configuring the Printer", Network Guide. For details about registering addresses in the address book, see Web Image Monitor Help.
- Encrypted files can be sent by e-mail only to destinations for which decryption is set. For details about sending encrypted files by e-mail, see "Security Settings to E-mails".

Reference


• p.45 "Security Settings to E-mails"

E-mail Screen

This section explains the screen layout when sending scan files by e-mail.

The function items displayed serve as selector keys. You can select or specify an item by pressing it.

When you select or specify an item on the display panel, it is highlighted like [______]. Keys that cannot be selected appear like [_____].

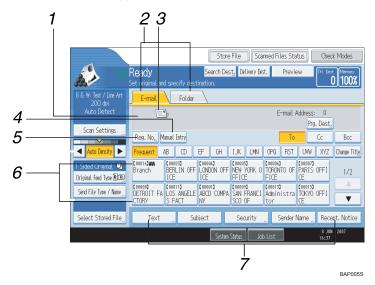

1. Destination field

The specified destination appears. If more than one destination has been specified, press [▲] or [▼] to scroll through the destinations.

2. E-mail / Folder

Press these tabs to switch between the E-mail screen and Scan to Folder screen.

Switch the screen also when sending the same files by both e-mail and Scan to Folder.

3. E-mail icon

Indicates that the E-mail screen is displayed.

4. [Manual Entry]

To specify destinations not registered in the address book, press this key, and then enter the e-mail addresses using the soft keyboard that appears.

5. [Reg. No.]

Press this key to specify the destination using a 5-digit registration number.

6. Destination List

The list of destinations registered in the machine appears. If all of the destinations cannot be displayed, press [▲] or [▼] to switch the screen.

The (**288**) symbol indicates a group destination.

The (🛱 or 🛱) symbol indicates a destination that can receive encrypted e-mail.

7. [Text] [Subject] [Security] [Sender Name] [Recept. Notice]

Enter the message and specify the subject, security (encryption and a signature), sender, and whether or not to use Message Disposition Notification.

Basic Operation for Sending Scan Files by E-mail

This section describes the basic operation for sending scan files by e-mail.

1. Make sure that no previous settings remain.

If a previous setting remains, press the [Clear Modes] key.

2. If the network delivery scanner screen or Scan to Folder screen appears, switch to the Email screen.

For details, see "Switching to the E-mail Screen".



- 3. Place originals.
- If necessary, press [Scan Settings] to specify scanner settings such as resolution and scan size.



For details, see "Various Scan Settings".

5. If necessary, specify the scanning density.

For details, see "Adjusting Image Density".

- 6. If necessary, press [Original Feed Type] to specify settings such as original orientation. For details, see "Setting of Original Feed Type".
- If necessary, press [Send File Type / Name] to specify settings such as file format and file name.

For details, see "Specifying the File Type and File Name".

8. Specify the destination.

You can specify multiple destinations.

For details, see "Specifying E-mail Destinations".

- If necessary, press [Text] to enter the e-mail message.
 For details, see "Specifying the E-mail Message"
- If necessary, press [Subject] to specify the e-mail subject.
 For details, see "Specifying the E-mail Subject".
- To specify the e-mail sender, press [Sender Name].
 For details, see "Specifying the E-mail Sender".
- 12. If necessary, press [Security] to specify [Encryption] or [Signature].

For details, see "Security Settings to E-mails".

13. To use Message Disposition Notification, press [Recept. Notice].

If you select [Recept. Notice], the selected e-mail sender will receive e-mail notification when the email recipient has opened the e-mail.

14. Press the [Start] key.

If you are scanning batches, place the next originals.

Note

- If you have selected two or more destinations, the destinations can be made to appear one by one by pressing [▲] or [♥] next to the destination field.
- To cancel a selected destination, press [▲] or [▼] to display the destination in the destination field, and then press the [Clear/Stop] key. You can cancel a destination selected from the destination list by pressing the selected destination again.
- In [System Settings], you can specify the administrator's e-mail address as the default sender name. This lets you send e-mail without entering anything for [Sender Name]. For details, see "File Transfer", General Settings Guide.
- Depending on the security setting, the logged-on user may be specified as [Sender Name].
- To use Message Disposition Notification, log on to the machine as a user and specify the sender. Note, however, that the [Recept. Notice] notification e-mail may not be transmitted if the e-mail software of the recipient does not support Message Disposition Notification.
- If you press [Check Modes] before pressing the [Start] key, the initial scanner screen switches
 to the Check Modes screen. You can use the Check Modes screen to check the settings such as
 destinations. For details, see "Check Modes".
- If you press [Preview] and then start scanning while [Preview] is selected, the Preview screen appears. You can use this screen to check how the originals are scanned and the scan setting used for scanning. After checking the preview, you can specify whether to send the file or not. For details, see "Preview".

- To cancel scanning, press the [Clear/Stop] key.
- You can also store a scan file and simultaneously send it by e-mail. For details, see "Simultaneous Storage and Sending by E-mail".
- If you select [Do not Use Signatures] under the signature settings in Web Image Monitor, you
 cannot attach signatures.
- To send encrypted files by e-mail, you must first configure the destination's decryption settings in the address book settings of Web Image Monitor. E-mail sent to a destination for which decryption is not configured cannot be decrypted even if [Encryption] is selected in [Security]. For details about configuring destination decryption settings, see Web Image Monitor Help.
- When [Security] is set to [Encryption], if you specify multiple destinations, a delivery failure
 message will appear each time a scan file is sent to a destination where decryption settings have
 not been configured.
- After an e-mail is sent, the destination, sender, subject, text, and file name fields will be automatically cleared. If you want to preserve the information in these fields, contact your local dealer.

Reference

- p.27 "Switching to the E-mail Screen"
- p.119 "Various Scan Settings"
- p.128 "Adjusting Image Density"
- p.129 "Setting of Original Feed Type"
- p.138 "Specifying the File Type and File Name"
- p.28 "Specifying E-mail Destinations"
- p.42 "Specifying the E-mail Message"
- p.41 "Specifying the E-mail Subject"
- p.37 "Specifying the E-mail Sender"
- p.45 "Security Settings to E-mails"
- p.12 "Check Modes"
- p.14 "Preview"
- p.44 "Simultaneous Storage and Sending by E-mail"

Switching to the E-mail Screen

This section explains how to switch the screen to the E-mail screen.

If the Scan to Folder screen is being displayed, press [E-mail] to switch to the E-mail screen.


If the network delivery scanner screen is being displayed, switch to the E-mail screen as follows:

1. Press [Delivery Dest.].



The E-mail screen or Scan to Folder screen appears.

2. If the Scan to Folder screen appears, press [E-mail].

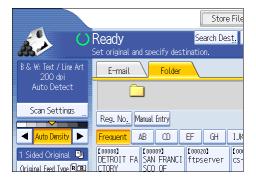

The E-mail screen appears.

Note

• You cannot switch from the network delivery scanner screen while delivery destinations are being specified. To clear the specified destination, display the destination in the destination field of the network delivery scanner screen, and then press the [Clear/Stop] key.

Specifying E-mail Destinations

This section explains how to specify e-mail destinations.

You can specify e-mail destinations by any of the following methods:

- Select the destination from the machine's address book
- Enter the e-mail address directly
- Search the LDAP server for the destination and select it

Before you select destinations, make sure you have selected [To]. If necessary, press [Cc] or [Bcc], and then select destinations.

Selecting the Destination from the Machine's Address Book

This section explains how to select the destination from the machine's address book.

🔁 Important

 To use this function, you must register the destinations in [System Settings] in advance. For details, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Settings Guide.

You can use the following methods to select destinations registered in the machine's address book:

- Select a destination from the list
- Select a destination by entering the registration number
- Select a destination by searching the machine's address book

Selecting a destination from the list

Select the destination from the destination list.

1. In the destination list, press the key including the destination name.



The key of the selected destination is highlighted, and the destination appears in the destination field at the top of the screen.

1

If the target destination does not appear, take one of the following steps:

- Display the destination by selecting its initial letter from the title
- Display the destination by pressing [▲] or [▼]


Note

• Depending on the security setting, some destinations may not appear in the destination list.

Selecting destinations by entering the registration numbers

Select the destination from the machine's address book using its registration number.

1. Press [Reg. No.].

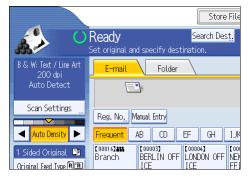

2. Using the number keys, enter the five-digit registration number assigned to the required destination.

If the entered number is less than five digits, press the [#] key after the last number.

Example: To enter 00003

Press the [3] key, and then press the [#] key.


By pressing [Change], you can change the selected destination.

3. Press [OK].

Searching the machine's address book for the destination and selecting it

This section explains how to search the machine's address book for the destination and select it.

1. Press [Search Dest.].

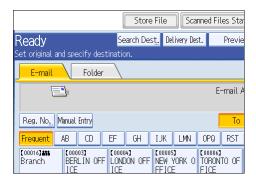

2. To search by destination name, press [Name].

To search by e-mail address, press [E-mail Address].

The soft keyboard appears.

You can also search by combining [Name] and [E-mail Address].

3. Enter the beginning of the destination name.

To search by e-mail address, enter the beginning of the address.

- 4. Press [OK].
- If necessary, press [Advanced Search] to specify the detailed search criteria, and then press [OK].

By pressing [Advanced Search], you can search using criteria such as [Name], [Fax Destination], [Email Address], and [Folder Name]. You can specify search criteria such as [Beginning Word] or [End Word]. You can refine your search using multiple criteria.



The illustrated screen is an example. The items that actually appear on the screen may differ.

6. Press [Start Search].

Destinations that match the search criteria are displayed.

- 7. Select a destination.
- 8. Select [To], [Cc], or [Bcc].

9. Press [OK].

Note

- If [LDAP Search] is set to [On] in [System Settings], check that [Address Book] in the upper part on the screen has been selected before executing the search.
- Search criteria that appear in [Advanced Search], such as [Name], [Fax Destination], [E-mail Address], and [Folder Name], are registered in the machine's address book. For details, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Setting Guide.
- By pressing [Details], you can view details about the selected destinations.
- Up to 100 destinations can be displayed as search results.
- By pressing [Advanced Search], the following criteria appear:
 - [Beginning Word]: The names which start with the entered character or characters are targeted.

For example, to search for "ABC", enter "A".

- [End Word]: The names which end with the entered character or characters are targeted. For example, to search for "ABC", enter "C".
- [Exact Match]: The names which correspond to an entered character or characters are targeted.

For example, to search for "ABC", enter "ABC".

• [Include one Word]: The names which contain an entered character or characters are targeted.

For example, to search for "ABC", enter "A", "B", or "C".


• [Exclude Words]: The names which do not contain an entered character or characters are targeted.

For example, to search for "ABC", enter "D".

Entering an E-mail Address Manually

This section explains how to enter an e-mail address manually.

1. Press [Manual Entry].

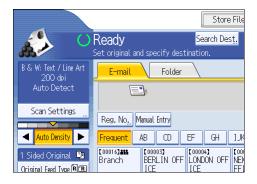

The soft keyboard appears.

- 2. Enter the e-mail address.
- 3. Press [OK].

Vote

- Depending on the security settings, [Manual Entry] may not be displayed.
- To change a registered destination e-mail address, press [Edit] to the left of the destination field to display the soft keyboard, use the soft keyboard to enter the new address, and then click [OK].
- The e-mail address that is entered directly can be registered in the machine's address book. For details, see "Registering a Directly-Entered Destination in the Address Book".

Reference

• p.35 "Registering a Directly-Entered Destination in the Address Book"

Selecting Destinations by Searching an LDAP Server

This section explains how to search for an address registered in an LDAP server and specify it as an e-mail destination.

Comportant 🗋

- To use this function, an LDAP server must be connected to the network.
- Under [System Settings], the LDAP server must be registered and [LDAP Search] must be set to [On]. For details, see "System Settings", General Settings Guide.

1. Press [Search Dest.].



2. Select the LDAP server that appears next to [Address Book].

Register the LDAP server in advance in [System Settings].

Search Destination	
	tions, and press [Start Search]. ales Division Trading Divisi
►Search Conditions	E-mail Folder
Name	
E-mail Address	

If authentication is required to access the selected server, the authentication screen appears. To authenticate, enter the user name and password.

To search by destination name, press [Name].

To search by e-mail address, press [E-mail Address].

The soft keyboard appears.

You can also search by combining [Name] and [E-mail Address]. If you search by [Name], LDAP server's settings determine whether the search is based on surname or first name. Consult your administrator.

4. Enter the beginning of the destination name.

To search by e-mail address, enter the beginning of the destination address.

- 5. Press [OK].
- If necessary, press [Advanced Search] to specify the detailed search criteria, and then press [OK].

By pressing [Advanced Search], you can search using criteria such as [Name], [Fax Destination], [Email Address], [Company Name], and [Department Name]. You can specify search criteria such as [Beginning Word] or [End Word]. You can refine your search using multiple criteria.



The illustrated screen is an example. The items that actually appear on the screen may differ.

7. Press [Start Search].

Destinations that match the search criteria are displayed.

- 8. Select the destination.
- 9. Select [To], [Cc], or [Bcc].

10. Press [OK].

\rm Note

- The [Name], [Fax Destination], [E-mail Address], [Company Name], and [Department Name] search criteria that appear in [Advanced Search] are registered in the LDAP server.
- If you specified [Search Options] on [Program / Change / Delete LDAP Server] under [System Settings], you can add a search condition for LDAP search on the [Advanced Search] screen. For details, see "System Settings", General Settings Guide.
- By pressing [Details], you can view details about the selected destinations.
- Up to 100 destinations can be displayed as search results.
- If an e-mail address returned by the LDAP server is too long, it will be impossible to specify it as the destination. For details about the number of characters that can be specified, see "Sending E-mail".
- You can register multiple e-mail addresses in individual LDAP server accounts. However, only one e-mail address will be displayed as the search result. Usually, the address that was registered first on the LDAP server is the address that is displayed.
- By pressing [Advanced Search], the following criteria appear:
 - [Beginning Word]: The names which start with the entered character or characters are targeted.

For example, to search for "ABC", enter "A".

- [End Word]: The names which end with the entered character or characters are targeted. For example, to search for "ABC", enter "C".
- [Exact Match]: The names which correspond to an entered character or characters are targeted.

For example, to search for "ABC", enter "ABC".

1

• [Include one Word]: The names which contain an entered character or characters are targeted.

For example, to search for "ABC", enter "A", "B", or "C".

• [Exclude Words]: The names which do not contain an entered character or characters are targeted.

For example, to search for "ABC", enter "D".

• [Fuzzy Search]: a vague search (The function of this vague search depends on the system supported by the LDAP server.)


Reference

• p.160 "Sending E-mail"


Registering a Directly-Entered Destination in the Address Book

This section explains how to register a directly-entered destination in the machine's address book. You can also register a destination selected from the LDAP server.

1. In the destination field, display the destination you want to register.

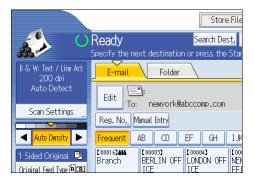

2. Press [Prg. Dest.].

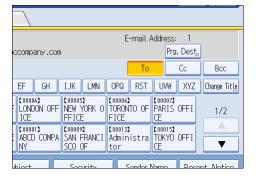

3. Press [Names], and then specify the name and other information to be registered.

For details about specifying the information to be registered, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Settings Guide.

4. Press [OK].

Note

- Depending on the security setting, [Prg. Dest.] may not appear. In such case, you cannot complete
 the registration.
- To register in the machine's address book a destination searched for and selected from the LDAP server, display the destination, and then press [Prg. Dest.].

1

Specifying the E-mail Sender

This section explains how to specify the e-mail sender.

To send e-mail, you must specify the name of the sender.

You can specify the e-mail sender by any of the following methods:

- Select the sender from the sender list
- Select the sender by entering the registration number
- Select the sender by searching the machine's address book


Vote

- Senders must be registered in advance under [System Settings]. For details, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Settings Guide.
- In [System Settings], you can specify the administrator's e-mail address as the default sender name. This lets you send e-mail without entering anything for [Sender Name]. For detail, see "File Transfer", General Settings Guide.
- Depending on the security setting, the logged-on user may be specified as [Sender Name].
- When a protection code has been set, a screen for entering the protection code appears after selecting the sender. Enter the protection code, and then press [OK]. If the protection code you entered is correct, the sender name is displayed.

Selecting a Sender from the List

This section explains how to select the sender from the machine's sender list.

1. Press [Sender Name].

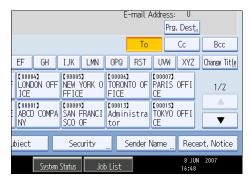

- 2. Select the sender.
- 3. Press [OK].

Using a Registration Number to Specify a Sender Name

Select the sender using the registration numbers specified by users in the machine's address book.

1. Press [Sender Name].



- 2. Press [Registration No.].
- 3. Using the number keys, enter the five-digit registration number assigned to the required destination.

If the entered number is less than five digits, press the [#] key after the last number.

Example: To enter 00006

Press the [6] key, and then press the [#] key.

By pressing [Change], you can change the selected destination.

4. Press [OK] twice.

Selecting the Sender by Searching the Machine's Address Book

This section explains how to select the sender by searching the machine's address book.

1. Press [Sender Name].



2. Press [Search].

3. To search by user name, press [Name].

To search by e-mail address, press [E-mail Address].

The soft keyboard appears.

You can also search by combining [Name] and [E-mail Address].

4. Enter the beginning of the sender's name you want to search for.

To search by e-mail address, enter the beginning of the address.

- 5. Press [OK].
- If necessary, press [Advanced Search] to specify the detailed search criteria, and then press [OK].

By pressing [Advanced Search], you can search using criteria such as [Name], [Fax Destination], [Email Address], and [Folder Name].

You can specify search criteria such as [Beginning Word] or [End Word]. You can refine your search using multiple criteria.



The illustrated screen is an example. The items that actually appear on the screen may differ.

7. Press [Start Search].

Destinations that match the search criteria are displayed.

- 8. Select the sender.
- 9. Press [OK] twice.

Note

- Search criteria that appear in [Advanced Search], such as [Name], [Fax Destination], [E-mail Address], and [Folder Name], are registered in the machine's address book. For details, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Setting Guide.
- By pressing [Details], you can view details about the selected sender.
- By pressing [Advanced Search], the following criteria appear:
 - [Beginning Word]: The names which start with the entered character or characters are targeted.

For example, to search for "ABC", enter "A".

• [End Word]: The names which end with the entered character or characters are targeted.

For example, to search for "ABC", enter "C".

• [Exact Match]: The names which correspond to an entered character or characters are targeted.

For example, to search for "ABC", enter "ABC".

• [Include one Word]: The names which contain an entered character or characters are targeted.

For example, to search for "ABC", enter "A", "B", or "C".

• [Exclude Words]: The names which do not contain an entered character or characters are targeted.

For example, to search for "ABC", enter "D".

1

Specifying the E-mail Subject

You can specify the subject for an e-mail when sending a file by e-mail.

1. Press [Subject].

	j:			E-mail A
Reg. No M	lanual Entry			То
Frequent	AB CD	EF GH	IJK LMN	OPQ RST
[00016] 411 Branch	[00003] BERLIN OFF ICE	[00004] LONDON OFF ICE	[00005] NEW YORK O FFICE	[00006] TORONTO OF FICE
[00008] DETROIT FA CTORY	[00011] LOS ANGELE S FACT	[00001] ABCD COMPA NY	[00009] SAN FRANCI SCO OF	[00013] Administra tor
Text	Sul	pject	Security	Sender M
		System	Status Joł	o List

2. Enter the subject.

To enter characters, press [Text Entry].

To enter symbols, press [Symbol Entry].

To add predefined User Text registered on this machine, press [User Text].

For details about entering the text, see "Entering Text", About This Machine.

3. Press [OK].

Specifying the E-mail Message

This section explains how to specify the e-mail message.

The message can be created in the following ways:

- Select the registered e-mail message from the list
- Enter the message directly


🔁 Important

• The messages that can be selected from the list must be registered in [System Settings] in advance. For details, see "File Transfer", General Settings Guide.

Selecting a Message from the List

You can select a message from the list.

1. Press [Text].

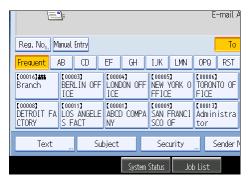

2. Select a message.



3. Press [OK].

Manual Entry of a Message

You can enter the message manually.

1. Press [Text].

E-mail						-mail A	
Reg. No. M	anual Entry						То
Frequent /	AB CD	EF	GH	IJK	LMN	OPQ	RST
[00016] 888 Branch	【00003】 BERLIN OF ICE	F LONDO		【00005 NEW \ FFICE	íork o	【00006】 TORON FICE	
[00008] DETROIT FA CTORY	[00011] LOS ANGEL S FACT	E ABCD NY		(00009 SAN F SCO (RANCI	【00013】 Admin tor	
Text		Subject		Sec	urity	S	iender N
			System	Status	Jol	o List	

2. Press [Manual Entry].


The soft keyboard appears.

- 3. Enter the message.
- 4. Press [OK] twice.

Simultaneous Storage and Sending by E-mail

This section explains how to store a file and simultaneously send it by e-mail.

1. Press [Store File].

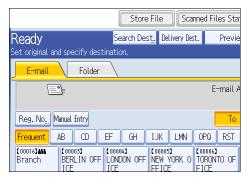

- 2. Select [Send & Store].
- If necessary, specify the stored file's information, such as [User Name], [File Name], and [Password].

For details, see "Specifying File Information for a Stored File".

- 4. Press [OK].
- 5. Specify the destination, make any other necessary settings, and then send the e-mail.

For details about sending a file by e-mail, see "Basic Operation for Sending Scan Files by E-mail".

• Note

- Depending on the security setting, [Access Privileges] may appear instead of [User Name]. For details about specifying [Access Privileges], consult the administrator.
- You can resend stored files by e-mail. To resend stored files, select the files on the Select Stored File screen, and then send them. For details, see "Sending a Stored File".
- If a file is simultaneously sent by e-mail and stored when [Security] is specified, both the sent and stored file will be encrypted, but the signature will be applied to the sent e- file only. Encryption of stored files is possible only when the optional HDD Encryption Unit is installed. For details about encrypting stored files, see "Encrypting Data on the Hard Disk", Security Reference.

🖪 Reference 🔵

- p.79 "Specifying File Information for a Stored File"
- p.24 "Basic Operation for Sending Scan Files by E-mail"
- p.88 "Sending a Stored File"

1

Security Settings to E-mails

This section explains the procedure for applying security (encryption and a signature) to e-mail.

Applying security (encryption and a signature) to e-mail helps prevent spoofing and information leakage.

Note

 The S/MIME authentication function is used to set security. For details about security settings, consult your network administrator.

Sending Encrypted E-mail

Use the following procedure to specify a destination for which encryption is configured, and encrypt and send an e-mail.

Destinations for which encryption can be configured for each transmission are indicated by this symbol

1. Press [Security].



2. Select [Encryption].

B & W: Text / Line Art 200 dpi Auto Detect	Security Select item.	
Scan Settings 🛄	Encryption	Encryption will be
Auto Density	Signature]
1 Sided Original 💵 Original Feed Type 🛙 🖭		
Send File Type / Name		

3. Press [OK].



• Encrypting e-mail will increase its size.

- When you specify a destination denoted by the symbol indicates that e-mail sent to this destination is always encrypted) encrypted e-mail will be sent regardless of the setting specified in [Security].
- If you have selected multiple destinations including destinations for which decryption has not been configured, e-mail sent to such destinations will not be encrypted even if you specify encryption.
- If you select [Send & Store], only the file sent by e-mail will be encrypted. The stored file will not be encrypted. Encryption of stored files is possible only when the optional HDD Encryption Unit is installed. For details about encrypting stored files, see "Encrypting Data on the Hard Disk", Security Reference.

Sending E-mail with a Signature

Use the following procedure to attach signatures to files and send those files by e-mail.

🚼 Important

- To perform this procedure, you must first select [Set Individually] in the signature settings of Web Image Monitor.
- 1. Press Security.
- 2. Select [Signature].



3. Press [OK].

🕓 Note

- The certificate (device certificate) installed on this machine is used to attach signatures.
- The S/MIME settings of Web Image Monitor limit the signature setting as follows:
 - If [Set Individually] is selected:

A signature can be applied to each transmission if you select [Signature] in [Security].

• If [Do not Use Signatures] is selected:

Pressing [Security] will not display [Signature].

• If [Use Signatures] is selected:

A signature is always applied to scan files that are sent by e-mail. You cannot cancel [Signature] in [Security].

Sending the URL by E-mail

This section explains how to send the URL of a scanned file by e-mail.


Use this function if network restrictions prevent you sending attachments by email.

- 🔂 Important
 - Depending on your e-mail application, a phishing warning might appear after you receive an e-mail message. To prevent phishing warnings appearing after you receive e-mail from a specified sender, you must add the sender to your e-mail application's exclusion list. For details about how to do this, see your e-mail application's Help.
- In [Scanner Features], on the [Send Settings] tab, press [Stored File E-mail Method], and then select [Send URL Link].

For details about specifying the setting, see "Scanner Features", General Settings Guide.

- Return to the initial scanner screen, and then press [Store File] to select [Send & Store].
 To send the URL by e-mail, you must select [Send & Store].
- 3. Press [OK].
- 4. Specify the e-mail destination, make any other necessary settings, and then send the e-mail. For details about sending e-mail, see "Basic Operation for Sending Scan Files by E-mail".

An e-mail similar to the following will be sent to the destination:

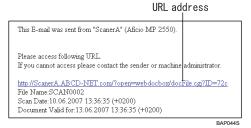

5. In the e-mail destination, click the URL.

Web Image Monitor starts.

6. View, delete, or download the file over the network using Web Image Monitor.

Vote

- For details about Web Image Monitor functions and their settings, see "Monitoring and Configuring the Printer", Network Guide.
- It is recommended that you use Web Image Monitor on the same network environment.
- Depending on the environment, even if you click the URL in the file sent by e-mail, the browser may not start and you may not be able to view the file. If this happens, click the same URL again, or manually enter the URL in the browser's address bar.

- To display details about the functions for managing stored files using Web Image Monitor, click [Help] on the upper right of each Web browser's window.
- You can send the URL by e-mail and simultaneously send it by Scan to Folder. In this case, the file is sent to the Scan to Folder destination, not the URL.

Reference

• p.24 "Basic Operation for Sending Scan Files by E-mail"

1. Sending Scan Files by E-mail

2. Sending Scan Files to Folders


Before Sending Files by Scan to Folder

This section describes the preparations and procedure for sending files by Scan to Folder.

Outline of Sending Scan Files by Scan to Folder

This section outlines the function for sending scan files by Scan to Folder.

Sending files to shared folders

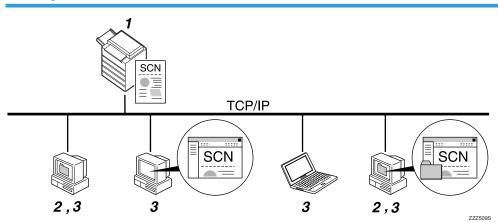

1. This machine

You can send scan files to shared network folders. To send scan files to shared network folders, use the SMB protocol.


2. Computer with a shared folder

To use this function, it is necessary to create a shared folder in advance. You can specify a shared folder to save scan files.

3. Client computer

You can also browse scanned files saved to a shared folder from a client computer.

Sending files to an FTP server

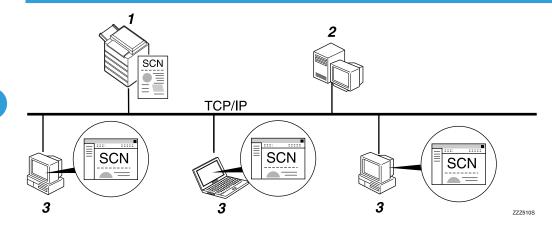

1. This machine


You can send scan files to FTP server folders. To send scan files to FTP server folders, use the FTP protocol.

2. FTP server

The FTP server is a server that provides file transfer services among computers on the same network. Transferred files are stored on this server. It is essential to have the FTP server inside the LAN/WAN where this machine belongs. It is not possible to access an FTP server via a proxy server.

3. Client computer

You can browse scanned files saved to an FTP server from a client computer. You need to have an FTP client program on the computer to connect to an FTP server.

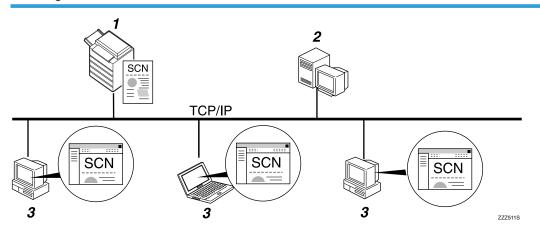

Sending files to a NetWare server

1. This machine

You can send scan files to NetWare folders. To send scan files to NetWare folders, use the NCP protocol.

2. NetWare server

You can use this server to share files over the network via NetWare. By sending image data to the server, files can be stored on the server.

3. Client computer

To download files, a computer must be running the NetWare client and be logged onto the server.

Preparation for Sending by Scan to Folder

To send scanned files by Scan to Folder, you must first perform the following:

- Check the machine is properly connected to the network
- Configure the network settings in [System Settings]
- Configure the necessary settings in [Scanner Features]

This section explains each of these steps and where you can find more information about them.

Check the machine is properly connected to the network

Check that this machine is properly connected to the network.

For details about how to connect this machine to a network, see "Connecting to the Interfaces", General Settings Guide.

Configure the network settings in [System Settings]

Configure the network settings in [System Settings] according to your environment and how you will be using the machine.

The following procedure explains connecting this machine to an IPv4 network using Ethernet cable.

Note that the settings you must configure will vary depending on your operating environment. For details about network settings and configuration procedures, see "Network Settings Required to Use Scan to Folder Function", General Settings Guide.

1. Press the [User Tools/Counter] key, and then press [System Settings].

The System Settings screen appears.

- 2. Press the [Interface Settings] tab.
- 3. Press [Machine IPv4 Address] to specify the machine's IPv4 address.

To specify a static IPv4 address for this machine, press [Specify], and then enter the IPv4 address and subnet mask.

To obtain an IPv4 address from a DHCP server automatically, press [Auto-Obtain (DHCP)].

- 4. Press [IPv4 Gateway Address], and then enter the IPv4 gateway address.
- 5. Press [Effective Protocol], and then make [IPv4] active.

To send files to shared folders, make [SMB] active.

To send files to Netware folders, make [NetWare] active.

6. Press [Exit] twice.

Configure the necessary settings in [Scanner Features]

Using [Scanner Features], you can make or change various settings related to the scanner function, such as compressing scan data or viewing the scanner journal. Configure the scanner settings according to your environment and how you will be using the machine.

This section explains how to display the Scanner Features screen. For details about the settings on this screen, see "Scanner Features", General Settings Guide.

- 1. Press the [User Tools/Counter] key.
- 2. Press [Scanner Features].

The Scanner Features screen appears.

Press the [General Settings], [Scan Settings], [Send Settings], or [Initial Settings] tabs and configure the relevant settings on those tabs.

Note

- If an extended wireless LAN board (optional) is installed, press [LAN Type] on the [Interface Settings] tab, then press [Ethernet], and then configure the network settings.
- If necessary, configure the shared folders, FTP server, and Netware server on the network in advance.
- Files can be sent by SMB in NetBIOS over TCP/IP environments only. Files cannot be sent by SMB in NetBEUI environments.
- File sending is still possible even if sending by SMB or FTP is unavailable from the control panel, Web Image Monitor, or Telnet etc.
- The settings you must configure in [System Settings] vary depending on your network environment. For details about network settings, see "Connecting the Machine", General Settings Guide.
- Scan to Folder is not supported in IPv6 environments.

Registering Destination Folders in the Address Book

You can register the addresses of frequently-used destination folders in the address book. Register the folder addresses in [Address Book Management] under [Administrator Tools] from [System Settings]. These addresses can also be registered as groups.


Note

- For details about registering the address of a destination folder in the address book, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Settings Guide.
- You can register entries in the address book using Web Image Monitor. For details about how to display Web Image Monitor, see "Monitoring and Configuring the Printer", Network Guide. For details about registering addresses in the address book, see Web Image Monitor Help.

Scan to Folder Screen

This section describes the screen layout when sending scan files by Scan to Folder.

The function items displayed serve as selector keys. You can select or specify an item by pressing it. When you select or specify an item on the display panel, it is highlighted like [______]. Keys that cannot be selected appear like [_____].

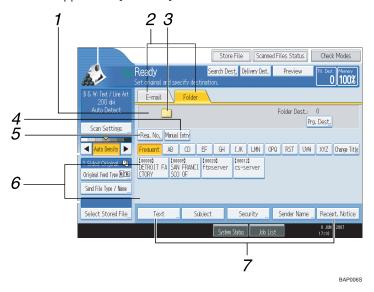

1. Destination field

The specified destination appears. If more than one destination has been specified, press [▲] or [▼] to scroll through the destinations.

2. E-mail/ Folder

Press to switch between the Scan to Folder screen and E-mail screen.

Also switch the screen when sending a file simultaneously by both Scan to Folder and e-mail.

3. Scan to Folder icon

Shows that the Scan to Folder screen is displayed.

4. [Manual Entry]

To specify destinations not registered in the address book, press this button to display the soft keyboard, and then enter the address of the destination folder.

5. [Reg. No.]

Press to specify a destination using a five-digit registration number.

6. Destination List

The list of destinations registered in the machine appears.

If all of the destinations cannot be displayed, press [▲] or [▼] to switch the screen.

The (*******) symbol indicates a group destination.

7. [Text] [Subject] [Security] [Sender Name] [Recept. Notice]

Enter the message and specify the subject, e-mail security (encryption and a signature), sender, and whether or not to use Message Disposition Notification. The entries will be used for e-mail transmission when sending files simultaneously by Scan to Folder and e-mail. For details, see "Sending Scan Files by E-mail".

Reference

• p.19 "Sending Scan Files by E-mail"

Basic Operations When Using Scan to Folder

This section describes the basic operations involved in using Scan to Folder.

1. Make sure that no previous settings remain.

If a previous setting remains, press the [Clear Modes] key.

2. If the network delivery scanner screen or E-mail screen appears, switch to the Scan to Folder screen.

For details, see "Switching to the Scan to Folder Screen".

			Store	e File	Sca	nned Fi	les Sta
Ready		Se	arch De	st. De	livery Des	st.	Previe
Set original and	d specify de:	stinatio	m.				
E-mail	Folder						
]=					E	-mail A
Reg. No, Mi	anual Entry						То
Frequent 4	AB CD	EF	GH	IJK	LMN	OPQ	RST
[00016]### Branch	[00003] BERLIN OF	F LONE	4] ION OFF	COODO NEW FFIC	YORK O	[00006] TORON FICE	

- 3. Place originals.
- 4. If necessary, press [Scan Settings] to specify scanner settings such as resolution and scan size.

For details, see "Various Scan Settings".

B & W: Text / Line Art 200 dpi	E-mail	Folder
Auto Detect		
Scan Settings	Reg. No <u>.</u> Manual I	Entry
🔺 🗛 Auto Density 🕨	Frequent AB	CD EF GH IJł
1 Sided Original 🛄 Original Feed Type 🕅 🖫	COODER CO	FRANCI ftpserver cs
Send File Type / Name		
Soloct Stored File	Tovt	Subject

5. If necessary, specify the scanning density.

For details, see "Adjusting Image Density".

- 6. If necessary, press [Original Feed Type] to specify settings such as original orientation. For details, see "Setting of Original Feed Type".
- 7. If necessary, press [Send File Type / Name] to specify settings such as file format and file name.

For details, see "Specifying the File Type and File Name".

8. Specify the destination.

You can specify multiple destinations.

For details, see "Specifying Scan to Folder Destinations".

9. Press the [Start] key.

If you are scanning batches, place the next originals.

Note

- If you have selected more than one destination, you can press [▲] or [▼] next to the destination field to scroll through the destinations.
- To cancel a selected destination, press [▲] or [▼] to display the destination in the destination field, and then press the [Clear/Stop] key. You can cancel a destination selected from the destination list by pressing the selected destination again.
- If you press [Check Modes] before pressing the [Start] key, the initial scanner screen switches to the Check Modes screen. You can use the Check Modes screen to check the settings such as destinations. For details, see "Check Modes".
- If you press [Preview], and then start scanning while [Preview] is highlighted, the Preview screen appears. You can use this screen to check how the originals are scanned and the scan settings used for scanning. After checking the preview, you can specify whether to send the file or not. For details, see "Preview".
- To cancel scanning, press the [Clear/Stop] key.
- You can also store a file and simultaneously send it by Scan to Folder. For details, see "Simultaneous Storage and Sending by Scan to Folder".
- After an e-mail is sent, the destination, and file name fields will be automatically cleared. If you want to preserve the information in these fields, contact your local dealer.

Reference

- p.59 "Switching to the Scan to Folder Screen"
- p.119 "Various Scan Settings"
- p.128 "Adjusting Image Density"
- p.129 "Setting of Original Feed Type"
- p.138 "Specifying the File Type and File Name"
- p.60 "Specifying Scan to Folder Destinations"
- p.12 "Check Modes"
- p.14 "Preview"
- p.73 "Simultaneous Storage and Sending by Scan to Folder"


Switching to the Scan to Folder Screen

This section explains how to switch to the Scan to Folder screen.

If the E-mail screen is being displayed, press [Folder] to switch to the Scan to Folder screen.

If the network delivery scanner screen is being displayed, switch to the Scan to Folder screen as follows:

1. Press [Delivery Dest.].

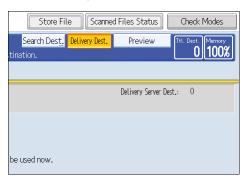

The E-mail screen or Scan to Folder screen appears.

2. If the E-mail screen appears, press [Folder].

		[Stor	e File	Sca	nned Fi	les Sta
Ready		Se	earch De	est, De	livery Des	it.	Previe
Set original a	nd specify	destinatio	on.				
E-mail	Fol	der					
	<u></u> :					E	-mail A
Reg. No.	Manual Entry						То
Frequent	AB CD	EF	GH	IJĸ	LMN	OPQ	RST
[00016]### Branch	【00003】 BERLIN ICF		4) Don Off	E COODE	YORK O	[00006] TORON FICE	

The Scan to Folder screen appears.

Vote

 You cannot switch from the network delivery scanner screen while delivery destinations are being specified. To clear the specified destination, display the destination in the destination field of the network delivery scanner screen, and then press the [Clear/Stop] key.

Specifying Scan to Folder Destinations

This section explains how to specify Scan to Folder destinations.

You can send a file by Scan to Folder by any of the following methods:

- Select a destination registered in the machine's address book
- Send a file to a shared network folder
- Send a file to an FTP server
- Send a file to a NetWare server

Selecting the Destination from the Machine's Address Book

This section explains how to select the destination from the machine's address book.

C Important

• To use this function, you must register the destinations in [System Settings] in advance.

You can select a destination registered in the machine's address book by any of the following methods:

- Select the destination from the destination list
- Select the destination by entering its registration number
- Select the destination by searching the machine's address book

Note

- If you have specified the address protection code for accessing the address book, the screen for entering the address protection code appears.
- Depending on the security setting, some destinations may not appear in the destination list.

Selecting a destination registered in the destination list

Select the destination from the destination list.

1. In the destination list, press the key including the destination name.

The key of the selected destination is highlighted, and the destination appears in the destination field at the top of the screen.

E-mail	Folder		
			Folder D
Reg. No <u>, M</u> anual E	intry		
Frequent AB	CD EF GH	IJK LMN	OPQ RST
COODEN DETROIT FA CTORY	FRANCI ftpserver	[00012] cs-server	
			,
Toyt	Subject	Socurity	Sondor N

If the target destination does not appear, take one of the following steps:

- Display the destination by selecting its initial letter from the title
- Display the destination by pressing [▲] or [▼]


Note

• Depending on the security setting, some destinations may not appear in the destination list.

Selecting destinations by entering the registration numbers

Select the destination from the machine's address book using its registration number.

1. Press [Reg. No.].

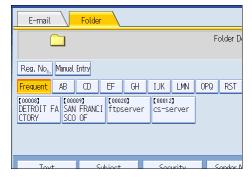

2. Enter the five-digit registration number that has been assigned to a destination folder using the number keys.

If the entered number is less than five digits, press the [#] key after the last number.

Example: To enter 00004

Press the [4] key, and then press the [#] key.


By pressing [Change], you can change the selected destination.

3. Press [OK].

Searching the machine's address book for the destination and selecting it

This section explains how to search the machine's address book for the destination and select it.

1. Press [Search Dest.].

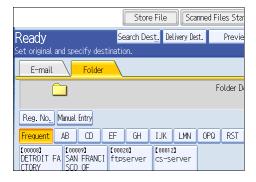

2. To search by destination name, press [Name].

To search by path, press [Folder Name].

Search Conditions	E-mail Folder
Name	
Folder Name	
Advanced Search	
Auvanceu Search	
Start Search	

The soft keyboard appears.

You can also search by combining [Name] and [Folder Name].

3. Enter the beginning of the destination name.

To search by path, enter the beginning of the path.

- 4. Press [OK].
- If necessary, press [Advanced Search] to specify the detailed search criteria, and then press [OK].

By pressing [Advanced Search], you can search using criteria such as [Name], [Fax Destination], [Email Address], and [Folder Name].

You can specify search criteria such as [Beginning Word] or [End Word]. You can refine your search using multiple criteria.



The illustrated screen is an example. The items that actually appear on the screen may differ.

6. Press [Start Search].

Destinations that match the search criterion are displayed.

- 7. Select the destination folder.
- 8. Press [OK].

Vote

- Search criteria that appear in [Advanced Search], such as [Name], [Fax Destination], [E-mail Address], and [Folder Name], are registered in the machine's address book. For details, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Setting Guide.
- By pressing [Details], you can view details about the selected destinations.
- Up to 100 destinations can be displayed as search results.
- By pressing [Advanced Search], the following criteria appear:
 - [Beginning Word]: The names which start with the entered character or characters are targeted.

For example, to search for "ABC", enter "A".

- [End Word]: The names which end with the entered character or characters are targeted. For example, to search for "ABC", enter "C".
- [Exact Match]: The names which correspond to an entered character or characters are targeted.

For example, to search for "ABC", enter "ABC".

• [Include one Word]: The names which contain an entered character or characters are targeted.

For example, to search for "ABC", enter "A", "B", or "C".

• [Exclude Words]: The names which do not contain an entered character or characters are targeted.

For example, to search for "ABC", enter "D".

Sending Files to a Shared Network Folder

This section explains how to specify the destination when sending files to a shared network folder.

🔁 Important 🔵

- The shared folder must have been created on the client computer in advance. For details about creating shared folders, see Windows Help.
- You can create the shared folder under Windows 2000/XP/Vista, Windows Server 2003/2003 R2/2008, and Mac OS X 10.2 or later.
- Depending on the operating system of the client computer, access to the shared folder may require authentication.
- This machine does not support DFS (Distributed File System).


You can send a file to a shared folder over the network by any of the following methods:

- Enter the path to the destination directly
- Specify the path by browsing the network for the destination

Entering the path to the destination manually

You can enter the path to the destination folder manually.

1. Press [Manual Entry].



- 2. Press [SMB].
- 3. Press [Manual Entry] on the right side of the path field.

The soft keyboard appears.

4. Enter the path for the folder.

The following is an example of a path where the folder name is "user" and the computer name is "desk01": \\desk01\user.

Instead of specifying the destination using its path, you can also use its IPv4 address.

5. Press [OK].

6. Depending on the destination setting, enter the user name for logging on to the client computer.

Press [Manual Entry] to the right of the user name field to display the soft keyboard.

7. Depending on the destination setting, enter the password for logging on to the client computer.

Press [Manual Entry] for the password to display the soft keyboard.

8. Press [Connection Test].

A connection test is performed to check whether the specified shared folder exists.

9. Check the connection test result, and then press [Exit].

10. Press [OK].

Note

- If authentication is required to access the folder, the login screen appears. Enter the user name and password.
- If you change the protocol after entering the path name, user name, or password, a confirmation message appears.
- Computer and shared folder names containing more than 12 characters cannot be displayed.
- To change the path for the folder that has been entered, press [Edit] on the left side of the destination field. Enter the correct path for the folder, and then press [OK].
- The connection test may take time.
- You may not be able to press [Connection Test] right after pressing [Cancel] during a connection test.
- Even if the connection test was successful, the machine may fail to transfer the file if you do not
 have write privileges for the file or there is not enough free hard disk space.
- You can register the path to the destination in the machine's address book. For details, see "Registering the Path to the Selected Destination in the Address Book".


Reference

• p.72 "Registering the Path to the Selected Destination in the Address Book"

Specifying the path by browsing the network for destinations

You can browse computers on the network for the destination folder, and then specify the path.

1. Press [Manual Entry].



- 2. Press [SMB].
- 3. Press [Browse Network] under the path name field.

Enter Destination		
▶ Protocol	SMB	FTP
▶Path	Browse Network]
▶User Name		
▶Password	Manual Entry	

Domains or workgroups on the network appear.

- 4. Select the domain or workgroup in which the destination folder is located.
- 5. Select the client computer that has the destination folder.

If you cannot find the computer you are looking for, press [Up One Level] and browse that level.

If authentication is required to access the selected computer, the authentication screen appears. To authenticate, enter the user name and password.

6. Select the destination folder.

When the selected folder has sub-folders, the sub-folders list appears.

If you cannot find the destination folder, press [Up One Level], and then search for the folder at that level.

7. Press [OK] twice.

Note

- If authentication is required to access the folder, the login screen appears. Enter the user name and password.
- If you change the protocol after entering the path name, user name, or password, a confirmation message appears.

- Computer and shared folder names containing more than 12 characters cannot be displayed.
- Up to 100 computers or shared folders can be displayed.
- The machine may fail to transfer the file if you do not have the write privileges for the shared folder or there is not enough free hard disk space.
- You can register the path to the destination in the machine' address book. For details, see "Registering the Path to the Selected Destination in the Address Book".

🖪 Reference 🔵

• p.72 "Registering the Path to the Selected Destination in the Address Book"

Sending Files to an FTP Server

This section explains how to specify destinations when sending files to an FTP server.

Entering the path to an FTP server manually

You can enter the path to an FTP server manually.

1. Press [Manual Entry].

E-mail	Folder			
				Folder D
Dee Ne Menuel I				
Reg. No, Manual E	ntry			
Frequent AB	CD EF	GH IJK	LMN	OPQ RST
C000083 DETROIT FA SAN CTORY	FRANCI ftpse		2] erver	
Tovt	Subject	C.,	arity	Sondor N

- 2. Press [FTP].
- 3. Press [Manual Entry] side of the server name field.

The soft keyboard appears.

4. Enter a server name.

Instead of specifying the destination using its path, you can also use its IPv4 address.

- 5. Press [OK].
- 6. Press [Manual Entry] on the right side of the path field.
- 7. Enter the path for the folder.

The following is an example of a path where the folder name is "user" and the subfolder name is "lib": user\lib.

- 8. Press [OK].
- 9. Enter the user name according to the setting at the destination.

Press [Manual Entry] to the right of the user name field to display the soft keyboard.

10. Enter the password according to the setting at the destination.

Press [Manual Entry] next to the password field to make the soft keyboard appear.

- To change the port number which is set in [System Settings], press [Change] on the right side of the port number field. Enter a port number using the number keys, and then press the [#] key.
- 12. Press [Connection Test].

A connection test is performed to check whether the specified folder exists.

- 13. Check the connection test result, and then press [Exit].
- 14. Press [OK].

Vote

- If you change the protocol after entering the path name, user name, or password, a confirmation message appears.
- The connection test may take time.
- You may not be able to press [Connection Test] right after pressing [Cancel] during a connection test.
- To change the registered path to a destination folder, press [Edit] to the left of the destination field to display the soft keyboard, enter the new path, and then click [OK].
- You can register the path to the destination in the machine's address book. For details, see "Registering the Path to the Selected Destination in the Address Book".
- The machine may fail to transfer the file if you do not have write privileges for the folder or there is not enough free hard disk space.

🖪 Reference 🖉

• p.72 "Registering the Path to the Selected Destination in the Address Book"

Sending Files to NetWare Server

This section explains how to specify destinations when sending files to a NetWare server.

The NetWare folder of the destination can be specified in an NDS tree or on a NetWare Bindery server, depending on the NetWare environment. Consult your administrator.


You can send a file to NetWare server by any of the following methods:

- Enter the destination path of the Netware server directly
- Specify the path by browsing to the destination on the Netware server

Entering the path of the NetWare server directly

You can enter the path of the NetWare server.

1. Press [Manual Entry].

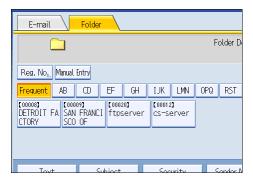

- 2. Press [NCP].
- 3. Select the connection type.

Press [NDS] to specify the folder in the NDS tree.

Press [Bindery] to specify the folder on the NetWare Bindery server.

4. Press [Manual Entry] on the right side of the path field.

	Manual Entry
rk	
	Manual Entry
Bindery	
	Connection Test

The soft keyboard appears.

5. Enter the path for the folder.

If you set the connection type to [NDS], the NDS tree name is "tree", the name of the context including the volume is "context", the volume name is "volume", and the folder name is "folder", the path will be \\tree\volume.context\folder".

If you set the connection type to [Bindery], the NetWare server name is "server", the volume name is "volume", and the folder name is "folder", the path will be "\\server\volume\folder".

- 6. Press [OK].
- 7. Enter the user name for logging on to the NDS tree or NetWare Bindery server.

Press [Manual Entry] to the right of the user name field. The soft keyboard appears.

2

If you press [NDS] for [Connection Type], enter the user name, and then enter the name of the context containing the user object. If the user name is "user" and the name of the Context is "context", the user name will be "user.context".

8. If a password is specified for the log on user, enter it.

Press [Manual Entry] to the right of the password field. The soft keyboard appears.

9. Press [Connection Test].

A connection test is performed to check whether the specified share folder exists.

- 10. Check the connection test result, and then press [Exit].
- 11. Press [OK].

Note

- If you change the protocol after entering the path name, user name, or password, a confirmation message appears.
- To change a registered path to a destination folder, press [Edit] to the left to the destination field to display the soft keyboard, enter the correct path to the folder, and then press [OK].
- You can connect only to folders that you have the read privileges for.
- The connection test may take time.
- You may not be able to press [Connection Test] right after pressing [Cancel] during a connection test.
- Even if the connection test was successful, the machine may fail to transfer the file if you do not
 have write privileges for the file or there is not enough free hard disk space.
- You can register the path to the destination in the machine's address book. For details, see "Registering the Path to the Selected Destination in the Address Book".

🖪 Reference 🔵

• p.72 "Registering the Path to the Selected Destination in the Address Book"

Specify the path by browsing to the destination on the Netware server

Specify the path by browsing to the destination folder in an NDS tree or on a NetWare Bindery server.

- 1. Press [Manual Entry].
- 2. Press [NCP].
- 3. Select the connection type.

Press [NDS] to specify a folder in the NDS tree.

Press [Bindery] to specify a folder on the NetWare Bindery server.

4. Press [Browse Network] under the path name field.

▶Path	
	Browse Network
▶User Name	
▶Password	Manual Entry
►Connection Type	NDS Bindery

If you selected [NDS] under [Connection Type], the NDS tree list appears.

If you selected [Bindery] under [Connection Type], the NetWare Bindery server list appears.

5. Search for the destination folder in the NDS tree or NetWare Bindery server.

If you cannot find the destination folder, press [Up One Level], and then search for the folder at that level.

- 6. Select the destination folder.
- 7. Press [OK] twice.

Note

- If you change the protocol after entering the path name, user name, or password, a confirmation message appears.
- Only folders that you have the read privileges for are displayed.
- If the language used for the NDS tree or by the NetWare Bindery server differs from that used by the machine, file names in the NDS tree or on the NetWare Bindery server might appear garbled.
- Up to 100 items can be displayed.
- If the selected NDS tree or NetWare Bindery server requires authentication, a login screen appears. Enter a user name and password for logging on to the NDS tree or NetWare Bindery server. If you log on to the NDS tree, enter a user name, and then enter the name of the context containing the user object. If the user name is "user" and the name of the Context is "context", the user name will be "user.context".
- The machine may fail to transfer the file if you do not have write privileges for the folder or there is not enough free hard disk space.
- You can register the path to the destination in the machine's address book. For details, see "Registering the Path to the Selected Destination in the Address Book".

Reference

• p.72 "Registering the Path to the Selected Destination in the Address Book"

Registering the Path to the Selected Destination in the Address Book

This section explains how to register folder paths you have entered manually or specified by browsing the network to the machine's address book.

1. In the destination field, display the destination you want to register.

B & W: Text / Line Art 200 dpi	E-mail	Folder
Auto Detect	Edit SMB \\\	server\folder
Scan Settings		
	Reg. No, Manual E	ntry
🔺 🗛 🖌 🖌	Frequent AB	CD EF GH IJK
1 Sided Original 🛄	[00008] DETROIT FA SAN	
Original Feed Type 🖭	DETROIT FA SAN CTORY SCO	
Send File Type / Name		
Soloct Stored File	Toyt	Subject S

2. Press [Prg. Dest.].

\folder	Folder Dest.: 1 Prg. Des <u>t.</u>
EF GH IJK LMN [00012] [ftpserver cs-server	OPQ RST UVW XYZ Change Title
whigh the Society	Sandar Nama Recont Natica

3. Press [Names], and then specify the name and other information to be registered.

For details about specifying the information to be registered, see "Registering Addresses and Users for Facsimile/Scanner Functions", General Settings Guide.

4. Press [OK].


Note

• Depending on the security setting, [Prg. Dest.] may not appear.

Simultaneous Storage and Sending by Scan to Folder

This section explains how to store a file and simultaneously send it by Scan to Folder.

1. Press [Store File].



- 2. Make sure that [Send & Store] is selected.
- 3. If necessary, specify the stored file's information, such as [User Name], [File Name], and [Password].

For details, see "Specifying File Information for a Stored File".

- 4. Press [OK].
- 5. Specify the setting for sending the file by Scan to Folder, and then send the file.

For details about sending a file by Scan to Folder, see "Basic Operations When Using Scan to Folder".

Note

- Depending on the security setting, [Access Privileges] may appear instead of [User Name]. For details about specifying [Access Privileges], consult the administrator.
- You can resend stored files by Scan to Folder. To resend stored files, select the files on the Select Stored File screen, and then send them. For details, see "Sending a Stored File".

Reference

- p.79 "Specifying File Information for a Stored File"
- p.57 "Basic Operations When Using Scan to Folder"
- p.88 "Sending a Stored File"

2. Sending Scan Files to Folders

3

3. Storing Files Using the Scanner Function

Before Storing Files


This section outlines file storage under the scanner function and provides related cautions.

Outline of File Storage under the Scanner Function

This section outlines storing files under the scanner function.

Coloritant 🖸

- You can specify a password for each stored file. Files that are not password-protected can be accessed by other users on the same local area network using DeskTopBinder. It is recommended that you protect stored files from unauthorized access by specifying passwords.
- Scan file stored in the machine may be lost if some kind of failure occurs. We advise against using the hard disk to store important files. The supplier shall not be responsible for any damage that may result from the loss of files. For long-term storage of files, we recommend the use of DeskTopBinder. For details, contact your local dealer.

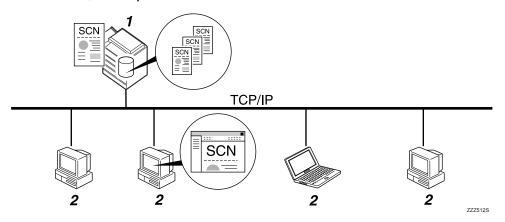

1. This Machine

You can store scan files on the machine's hard disk. The stored files can be sent by e-mail, Scan to Folder, or the network delivery scanner.

2. Client Computer

Using DeskTopBinder, you can, over the network, view, copy, or delete files stored in the machine. Using Web Image Monitor, you can, over the network, view, download, send, or delete files stored in the machine. For details about DeskTopBinder Lite, see DeskTopBinder Lite-related manuals. For details about Web Image Monitor, Web Image Monitor Help.

Note

- You can download DeskTopBinder Lite from the Web site and then install it on the client computer.
- Stored files will be deleted after a set period. For details about specifying the period, see "Administrator Tools", General Settings Guide.
- Files stored under the scanner function cannot be printed from the machine's control panel. Print the files from a client computer after receiving them on the computer.
- You can also store a file and simultaneously send it. For details, see "Simultaneous Storage and Sending by E-mail", "Simultaneous Storage and Sending by Scan to Folder", and "Simultaneous Storage and Delivery".

Reference

- p.44 "Simultaneous Storage and Sending by E-mail"
- p.73 "Simultaneous Storage and Sending by Scan to Folder"
- p.112 "Simultaneous Storage and Delivery"

Basic Operation for Storing Scan Files

This section describes the basic operation for storing scan files.

1. Make sure that no previous settings remain.

If a previous setting remains, press the [Clear Modes] key.

- 2. Place originals.
- 3. Press [Store File].

_	Store	nned Fil	es Sta			
Ready	Search Des	s <u>t</u> . Del	livery Des	st.	Previe	
Set original and specify desti	et original and specify destination.					
E-mail Folder						
Folder D						
Reg. No, Manual Entry						
Frequent AB CD E	EF GH	IJK	LMN	OPQ	RST	
	[00020] ftpserver	【00012 CS-S6) erver			

- 4. Press [Store Only].
- If necessary, specify file information, such as [User Name], [File Name], and [Password].
 For details, see "Specifying File Information for a Stored File".
- 6. Press [OK].
- If necessary, press [Scan Settings] to specify scanner settings such as resolution and scan size.

For details, see "Various Scan Settings".

B & W: Text / Line Art 200 dpi	E-mail Folder					
Auto Detect	E	•				
Scan Settings	Reg. No <u></u>	Manual	Entry			
◀ Auto Density ►	Frequent	AB	CD	EF	GH	IJł
1 Sided Original 📱 Original Feed Type 🕅 🏗	[00016] an Branch	E 000 BERI I CE	03] LIN OFF	E LONE	4) Don Off	C00 NEV FF
Send File Type / Name	COOORS DETROIT FA CTORY	4 LOS S F.		E ABCE NY	1) Compa	Coo San Sco
Coloct Stored File	Tout		- C	ubicat	-	

- 8. If necessary, specify the scanning density. For details, see "Adjusting Image Density".
- **9.** If necessary, press [Original Feed Type] to specify settings such as original orientation. For details, see "Setting of Original Feed Type".

10. Press the [Start] key.

If you are scanning batches, place the next originals.

Vote

- Depending on the security setting, [Access Privileges] may appear instead of [User Name]. For details about specifying [Access Privileges], consult the administrator.
- By pressing [Send & Store], you can simultaneously store scan files and send them. For details, see "Simultaneous Storage and Sending by E-mail", "Simultaneous Storage and Sending by Scan to Folder", and "Simultaneous Storage and Delivery".
- You cannot press [Store File] if:
 - "PDF" is selected as the file type and security is applied
 - High Compression PDF is selected as the file type
- You cannot specify [Store Only] if:
 - a destination is specified
 - [Preview] is selected
- To cancel scanning, press the [Clear/Stop] key.
- After an e-mail is sent, the file information fields will be automatically cleared. If you want to preserve the information in these fields, contact your local dealer.

Reference

- p.79 "Specifying File Information for a Stored File"
- p.119 "Various Scan Settings"
- p.128 "Adjusting Image Density"
- p.129 "Setting of Original Feed Type"
- p.44 "Simultaneous Storage and Sending by E-mail"
- p.73 "Simultaneous Storage and Sending by Scan to Folder"
- p.112 "Simultaneous Storage and Delivery"

Specifying File Information for a Stored File

You can specify information for a stored file, such as user name, file name, and password.

By specifying information for a stored file, you can search for the file by user name or file name, or protect the file with a password to prevent other people from accessing the file.

Specifying a User Name

You can specify a user name for the stored file.

1. Press [Store File].

Store File Stanned Files Sta						
Ready	Search Dest	. Delivery De	st.	Previe		
	et original and specify destination.					
E-mail Folder						
Folder D						
Reg. No. Manual Entry						
Frequent AB CD EF	F GH I	JK LMN	OPQ	RST		
		00012] :S-Server				

The Store File screen appears.

2. Press [User Name].

A list of user names appears.

3. Press the user name you want to specify.

The user names shown here are names that were registered on the [Administrator Tools] tab in [System Settings]. To specify a name not shown here, press [Manual Entry], and then enter the user name.

4. Press [OK] twice.

Note

• Depending on the security setting, [Access Privileges] may appear instead of [User Name]. For details about specifying [Access Privileges], consult the administrator.

Specifying a File Name


This section explains how to change the name of a stored file.

A stored file is allocated a name starting with "SCAN" followed by a 4-digit number.

• Example: SCAN0001

You can change this file name.

1. Press [Store File].

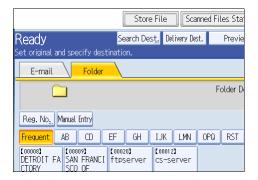

The Store File screen appears.

2. Press [File Name].

The soft keyboard appears.

- Change the file name.
- 4. Press [OK] twice.

Note

• For details about entering the text, see "Entering Text", About This Machine.

Specifying a Password


You can specify a password for the stored file.

C Important

• Do not forget the password. If you forget it, consult the system administrator of the machine.


By specifying a password, you can ensure that only the people who know the password can view the file.

1. Press [Store File].

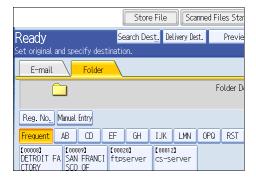

The Store File screen appears.

- 2. Press [Password].
- 3. Using the number keys, enter a four to eight-digit number.
- 4. Press [OK].
- 5. Enter the same number again using the number keys.



6. Press [OK] twice.

3

Displaying the List of Stored Files

This section describes the list of stored files.


Using the list of stored files, you can delete stored files or change the file's information.

List of Stored Files

This section describes how the list of stored files is displayed.

To display the list of stored files, press [Select Stored File] on the initial scanner screen.

The function items displayed serve as selector keys. You can select or specify an item by pressing it. When you select or specify an item on the display panel, it is highlighted like [______]. Keys that cannot be selected appear like [_____].

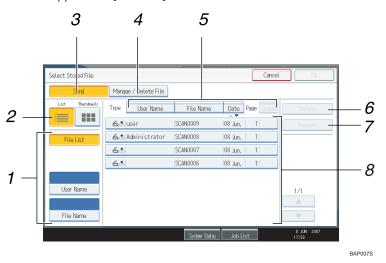

1. Keys for searching for files

Press to switch to the screens for searching for a file by user name or file name, or to the screen for displaying all files.

2. List/ Thumbnails

You can select whether to display stored files as a list or as thumbnails.

3. [Send]

Press this to deliver or send a stored file by e-mail or Scan to Folder.

4. [Manage / Delete File]

Press this to delete stored files or change the file data.

5. Keys for sorting files

Press to sort the files using the selected item. Select the same item once more for a reverse sort. However, the files cannot be sorted in reverse delivery.

6. [Details]

Press this to display details about the selected file.

7. [Preview]

Press this to display a preview of the selected file. For Detail, see "Checking a Stored File Selected from the List".

8. List of stored files

Displays the list of stored files.

If the file you want to select is not displayed in the list, press [] or [] to scroll the screen. If a password has been specified for a file, a key icon appears to the left of the user name for the file.

Vote

- Depending on the security setting, some files may not appear in the list.
- Files stored under functions other than the scanner function do not appear on this screen.

Reference

• p.85 "Checking a Stored File Selected from the List"

Searching the List of Stored Files

You can search for files from the stored files using the user name or file name.

You can search the list of stored files by either of the following methods:

- Search by user name
- Search by file name

Searching by user name

You can search for a stored file by its user name.

1. Press [Select Stored File].



2. Press [User Name].

83

3. Select the user name to be used for the search.

The user names shown here are names that were registered on the [Administrator Tools] tab in [System Settings]. To change a user name not shown here, press [Manual Entry], and then enter the user name.

4. Press [OK].

The search begins, and then files belonging to the specified user appear.

Searching by file name

You can search for a stored file by its file name.

1. Press [Select Stored File].

AUTO DETECT		ŀ				
Scan Settings	Reg. No. M	anual I	Entry			
Auto Density	Frequent	AB	CD	EF	GH	IJĸ
1 Sided Original 🛄 Original Feed Type 🖻 🖭	[00016]## Branch	COOOL BERL ICE	IN OFF	LONE LONE	04] DON OFF	COON NEV FF 1
Send File Type / Name	[00008] DETROIT FA CTORY	[0001 LOS S F/	ANGELE	Coooc ABCE NY)1]) COMPA	Coor SAN SCC
Select Stored File	Text		SL	biect		S
					System	_

2. Press [File Name].

The soft keyboard appears.

3. Enter the file name.

For information about how to enter characters, see "Entering Text", About This Machine.

4. Press [OK].

The search starts, and files whose name starts with the entered string appear.

Checking Stored Files

You can display the Preview screen and check a stored file on the machine or from the client computer.

Checking a Stored File Selected from the List

This section explains how to preview a file selected from the list of stored files.

1. Press [Select Stored File].

AUTO DETECT		ŀ		
Scan Settings	Reg. No, M	anual Entry		
🔺 🗛 Auto Density 🕨	Frequent /	AB CD	EF GH	IJĸ
1 Sided Original 🗳 Original Feed Type 🕅 🖪	[00016]## Branch	【00003】 BERLIN OFF ICE	[00004] LONDON OFF ICE	COON NEV FF 1
Send File Type / Name	[00008] DETROIT FA CTORY	【00011】 LOS ANGELE S FACT	C000013 ABCD COMPA NY	COO SAN SCC
Select Stored File	Text	Su	bject	S
			System	Statu

The list of stored files appears.

For details about the list of stored files, see "List of Stored Files".

2. From the list of stored files, select the file you want to check.

You can select more than one file.

3. Press [Preview].

A preview of the selected stored file appears.


Vote

• If you select a password-protected stored file, a screen for entering the password appears. To select the file, enter the correct password, and then press [OK].

Reference

• p.82 "List of Stored Files"

Stored File Preview Screen

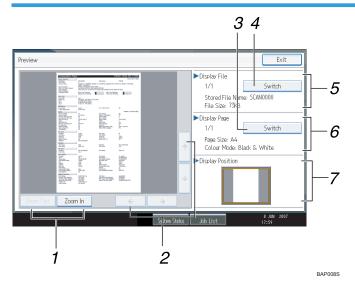

1. [Zoom Out], [Zoom In]

In previewing, you can reduce or enlarge the file image.

2. [←] [→] [↑] [↓]

You can scroll the preview screen.

3. [Switch]

You can switch to a preview of another page.

4. [Switch]

You can switch to a preview of another file.

5. Display File

The name and size of the selected file appear.

6. Display Page

The page number of the previewed page, total number of pages, page size, and color mode appear.

7. Display Position

When the preview is enlarged, the location of the part of the page displayed on the preview screen is indicated.

Checking Stored Files from a Client Computer

Using DeskTopBinder Lite or Web Image Monitor, you can also display the files stored in the machine on a client computer.

🔁 Important

• To view stored files from a client computer, you must first make the required IPv4 or IPv6 address settings using DeskTopBinder or Web Image Monitor.

3

You can also check files stored under the copier, Document Server, and printer functions.

Using DeskTopBinder Lite to display stored files

The stored files are displayed and can be checked on a client computer using DeskTopBinder Lite.

Note

- You can also transfer the stored files to the client computer.
- You can download DeskTopBinder Lite from the Web site and then install it on the client computer.
- For details about DeskTopBinder, see the DeskTopBinder-related manuals.

Using Web Image Monitor to Display Stored Files

The stored files are displayed and can be checked also on a client computer using Web Image Monitor.

If you enter http:// (machine IPv4 or IPv6 address, or host name)/ in the address bar of the client computer's Web browser, the top page of Web Image Monitor appears.

🚼 Important

 Do not begin IPv4 segments with zeros. For example: if the address is "192.168.001.010", enter it as "192.168.1.10".

Vote

- You can also download the stored files.
- It is recommended that you use Web Image Monitor only within your local area network.
- For details about displaying or downloading stored files using Web Image Monitor, see "Displaying Stored Documents with Web Image Monitor", "Downloading Stored Documents with Web Image Monitor", Copy/ Document Server Reference.
- For details about making settings for using Web Image Monitor, see "Monitoring and Configuring the Printer", Network Guide.
- For details about functions for managing stored files using Web Image Monitor, click [Help] on the upper-right corner of the displayed screen.

Sending a Stored File

This section explains how to send a stored file.

Stored files can be sent by e-mail, Scan to Folder, or the network delivery scanner.

There are two methods of sending stored files by e-mail. Settings made under [Scanner Features] determine which method is used. For details, see "Scanner Features", General Settings Guide.

• To send the URL by e-mail:

Under [Scanner Features], [Stored File E-mail Method], select [Send URL Link]. This method is useful when network restrictions prevent you sending attachments.

• To send an attached file by e-mail:

Under [Scanner Features], [Stored File E-mail Method], select [Send File].

🔁 Important

 Depending on your e-mail application, a phishing warning might appear after you receive an e-mail message. To prevent phishing warnings appearing after you receive e-mail from a specified sender, you must add the sender to your e-mail application's exclusion list. For details about how to do this, see your e-mail application's Help.

Sending Stored Files

This section mainly explains how to select the files you want to send.

For details about how to select stored files and make settings for sending those files, see respective pages.

1. Press [Select Stored File].

AUTO DETECT	E	ŀ				
Scan Settings	Reg. No. M	anual (intry			
Auto Density 🕨	Frequent /	AB	CD	EF	GH	IJĸ
1 Sided Original 🛄 Original Feed Type 🛙 📳	[00016]### Branch	CODO BERL ICE	IN OFF	C00004) LONDC ICE	N OFF	COOL NEV FF]
Send File Type / Name	[00008] DETROIT FA CTORY	【0001 LOS S F/	ANGELE	(00001) ABCD NY	COMPA	C001 SAN SCC
Select Stored File	Text		Sub	ject		S
					System	Statu

The list of stored files appears.

2. Select the file you want to send.

You can select multiple files.

If you select multiple files, the files are sent in the selected order.

If you press [Queue], only the files you have selected are displayed in the order they will be sent.

For details about selecting the stored files, see "Displaying the List of Stored Files".

- 3. Press [OK].
- 4. If necessary, switch to the E-mail, Scan to Folder, or network delivery scanner screen.

For details about switching the screen, see "Switching to the E-mail Screen", "Switching to the Scan to Folder Screen", or "Switching to the Network Delivery Scanner Screen".

5. Specify the destination, make any other necessary settings.

For details about how to send a file by e-mail or Scan to Folder, or how to deliver a file, see "Basic Operation for Sending Scan Files by E-mail", "Basic Operations When Using Scan to Folder", or "Basic Operation for Delivering Files".

6. Press the [Start] key.

The stored file will be sent.

Note

- If you select a password-protected stored file, a screen for entering the password appears. To select the file, enter the correct password, and then press [OK].
- When the URL has been sent by e-mail, the recipient can check the stored file by clicking that URL. For details, see "Sending the URL by E-mail".
- You can encrypt e-mail or attach a signature to it. For details, see "Security Settings to E-mails".

Reference

- p.82 "Displaying the List of Stored Files"
- p.27 "Switching to the E-mail Screen"
- p.59 "Switching to the Scan to Folder Screen"
- p.102 "Switching to the Network Delivery Scanner Screen"
- p.24 "Basic Operation for Sending Scan Files by E-mail"
- p.57 "Basic Operations When Using Scan to Folder"
- p.99 "Basic Operation for Delivering Files"
- p.48 "Sending the URL by E-mail"
- p.45 "Security Settings to E-mails"

Managing Stored Files

This section explains how to delete stored files and how to change the data for stored files.

Deleting a Stored File


This section explains how to delete a stored file.

1. Press [Select Stored File].

AUTO DETECT	E	<u>_</u>		
Scan Settings "	Reg. No, M	anual Entry		
🔺 🗛 Auto Density 🕨	Frequent	AB CD	EF GH	IJł
1 Sided Original 🛄 Original Feed Type 🖭	[00016] 488 Branch	【00003】 BERLIN OFF ICE	【00004】 LONDON OFF ICE	€00 NEV FF:
Send File Type / Name	[00008] DETROIT FA CTORY	【00011】 LOS ANGELE S FACT	[00001] ABCD COMPA NY	COO San Sco
Select Stored File	Text	Sut	piect	S
				_
			System	Statı

The list of stored files appears.

2. Press [Manage / Delete File].

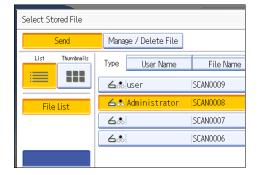

3. Select the file you want to delete.

If you select a password-protected stored file, a screen for entering the password appears. To select the file, enter the correct password, and then press [OK].

4. Press [Delete File].

A confirmation message about deleting the file appears.

5. Press [Yes].

Note

• Files waiting for delivery cannot be deleted.

 You can also delete files stored in the machine by accessing the machine from a client computer using Web Image Monitor or DeskTopBinder. For detail about Web Image Monitor, see Web Image Monitor Help. For details about DeskTopBinder, see the manuals supplied with DeskTopBinder.

Changing Information for a Stored File

You can change information for a stored file, such as [User Name], [File Name], and [Password].


Note

• Information for files waiting for being sent cannot be changed.

Changing a user name


You can change the user name for a stored file.

1. Press [Select Stored File].

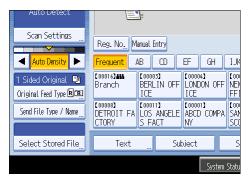

The list of stored files appears.

2. Press [Manage / Delete File].

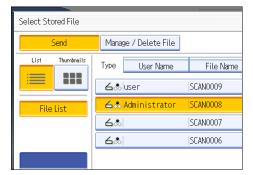

3. Select the file containing the information you want to change.

If you select a password-protected stored file, a screen for entering the password appears. Enter the password, and then press [OK].

- 4. Press [Change User Name].
- 5. Enter a new user name.

The user names shown here are names that were registered on the [Administrator Tools] tab in [System Settings]. To change a user name not shown here, press [Manual Entry], and then enter the user name.

- 6. Press [OK].
- 7. Make sure that the user name was changed as necessary, and press [Exit].

Vote

- Using Web Image Monitor or DeskTopBinder you can also change the user name of a file stored in the machine from the client computer. For details about Web Image Monitor, see Web Image Monitor Help. For details about DeskTopBinder, see the manuals supplied with DeskTopBinder.
- Depending on the security setting, [Change Access Priv.] may appear instead of [Change User Name]. For details about specifying [Change Access Priv.] consult the administrator.

Changing a file name


You can change the file name of a stored file.

1. Press [Select Stored File].

AUTO D'ETECT		
Scan Settings	Reg. No Manual Entry	
Auto Density 🕨	Frequent AB CD EF GH I.	١ŀ
1 Sided Original 💵 Original Feed Type 🖭	Branch BERLIN OFF LONDON OFF N	00 El
Send File Type / Name	DETROIT FA LOS ANGELE ABCD COMPA S	oo Al Ci
Select Stored File	Text " Subject	S
	System Sta	atu

The list of stored files appears.

2. Press [Manage / Delete File].

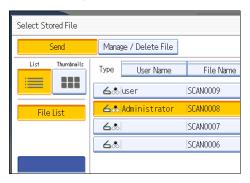

3

3. Select the file containing the file information you want to change.

If you select a password-protected stored file, a screen for entering the password appears. Enter the password, and then press [OK].

- 4. Press [Change File Name].
- 5. Change the file name.
- 6. Press [OK].
- 7. Make sure that the file information was changed as necessary, and press [Exit].

Vote

- For information about how to enter characters, see "Entering Text", About This Machine.
- Using Web Image Monitor or DeskTopBinder, you can also change the name of a file stored in the machine from the client computer. For details about Web Image Monitor, see Web Image Monitor Help. For details about DeskTopBinder, see the manuals supplied with DeskTopBinder.

Changing a password

Enter the password for accessing the stored file.

🔁 Important

- Be sure not to forget the password. If you forget it, consult the system administrator of the machine.
- 1. Press [Select Stored File].

Auto Detect		ŀ		
Scan Settings <u>"</u>	Reg. No <u></u> M	anual Entry		
Auto Density 🕨	Frequent /	AB CD	EF GH	IJĸ
1 Sided Original 🛄 Original Feed Type 🛙 📳	[00016] 888 Branch	[00003] BERLIN OFF ICE	[00004] LONDON OFF ICE	K 001 NEV FF 1
Send File Type / Name	[00008] DETROIT FA CTORY	【00011】 LOS ANGELE S FACT	(00001) ABCD COMPA NY	C 001 SAN SCO
Select Stored File	Text	Si	bject	S
			System	Statu

The list of stored files appears.

- 2. Press [Manage / Delete File].
- 3. Select the file containing the file information you want to change.

If you select a password-protected stored file, a screen for entering the password appears. Enter the password, and then press [OK].

- 4. Press [Change Password].
- 5. Using the number keys, enter a new four to eight-digit password.

- 6. Press [OK].
- 7. Enter the same number again using the number keys.
- 8. Press [OK].
- 9. Press [Exit].

Note

 Using Web Image Monitor or DeskTopBinder, you can also change the password of a file stored in the machine from the client computer. For details about Web Image Monitor, see Web Image Monitor Help. For details about DeskTopBinder, see the manuals supplied with DeskTopBinder.

4. Delivering Scan Files

Before Delivering Files


This section describes the necessary preparations and the procedure for using the network delivery scanner.

🚼 Important

• To use the network delivery scanner function, your network must have a delivery server on which the ScanRouter delivery software (optional) is installed. You must also register destination and sender information on the delivery server. For details about the ScanRouter delivery software, see the manuals that are supplied with it.

Outline of Scan File Delivery

This section outlines the function for delivering files using the network delivery scanner.

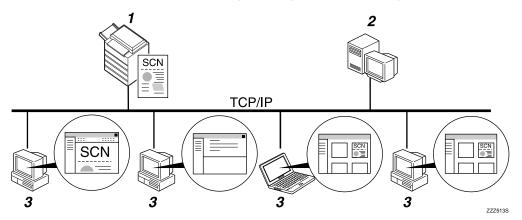

1. This machine

You can send scan files to the delivery server.

2. Delivery server

Install the ScanRouter delivery software on this computer to use it as the delivery server.

After receiving a scan file, the delivery server delivers the file according to the setting specified for the destination. The delivery settings are as follows:

- Storing the file in an in-tray
- Delivering the file by e-mail
- Storing the file in a selected folder

For details about the ScanRouter delivery software, see the manuals supplied with ScanRouter delivery software.

3. Client Computer

How to check a file from the client computer depends on the delivery method.

For example, you can check a file by one of the following methods:

- Use DeskTopBinder to view a file delivered to the in-tray.
- Use e-mail software to receive e-mail with an attached file.
- Browse a folder for a stored file.

Preparing to Deliver Files

To deliver scanned files, you must first perform the following:

- Check the machine is properly connected to the network
- Configure the network settings in [System Settings]
- Configure the necessary settings in [Scanner Features]
- Configure the settings in ScanRouter delivery software

This section explains each of these steps and where you can find more information about them.

Check the machine is properly connected to the network

Check that this machine is properly connected to the network.

For details about how to connect this machine to a network, see "Connecting to the Interfaces", General Settings Guide.

Configure the network settings in [System Settings]

Configure the network settings in [System Settings] according to your environment and how you will be using the machine.

The following procedure explains connecting this machine to an IPv4 network using Ethernet cable.

Note that the settings you must configure will vary depending on your operating environment. For details about network settings and configuration procedures, see "Network Settings Required to Use the Network Delivery Scanner", General Settings Guide.

1. Press the [User Tools/Counter] key, and then press [System Settings].

The System Settings screen appears.

- 2. Press the [Interface Settings] tab.
- 3. Press [Machine IPv4 Address] to specify the machine's IPv4 address.

To specify a static IPv4 address for this machine, press [Specify], and then enter the IPv4 address and subnet mask.

To obtain an IPv4 address from a DHCP server automatically, press [Auto-Obtain (DHCP)].

- 4. Press [IPv4 Gateway Address], and then enter the IPv4 gateway address.
- 5. Press [Effective Protocol], and then make [IPv4] active.
- 6. Press the [File Transfer] tab.
- 7. Press [Delivery Option], and then press [On].

8. Press [Exit] twice.

Configure the necessary settings in [Scanner Features]

Using [Scanner Features], you can make or change various settings related to the scanner function, such as compressing scan data or viewing the scanner journal. Configure the scanner settings according to your environment and how you will be using the machine.

This section explains how to display the Scanner Features screen. For details about the settings on this screen, see "Scanner Features", General Settings Guide.

- 1. Press the [User Tools/Counter] key.
- 2. Press [Scanner Features].

The Scanner Features screen appears.

Press the [General Settings], [Scan Settings], [Send Settings], or [Initial Settings] tabs and configure the relevant settings on those tabs.

Configure the settings in ScanRouter delivery software

Using the ScanRouter delivery software, register this machine as an I/O device. In addition, register destinations and specify such settings as the delivery type and sender.

For details about settings, see the manuals supplied with the ScanRouter delivery software.

Note

- If an extended wireless LAN board (optional) is installed, press [LAN Type] on the [Interface Settings] tab, then press [Ethernet], and then configure the network settings.
- To view files delivered to an in-tray, DeskTopBinder Lite must be installed on the client computer. You can download DeskTopBinder Lite from the Web site and then install it on the client computer.
- The settings you must configure in [System Settings] vary depending on your network environment. For details about network settings, see "Connecting the Machine", General Settings Guide.

Reference


• p.165 "Scanner Features"

Network Delivery Scanner Screen

This section describes the screen layout when using the network delivery scanner.

The function items displayed serve as selector keys. You can select or specify an item by pressing it. When you select or specify an item on the display panel, it is highlighted like [______]. Keys that cannot be selected appear like [_____].

4

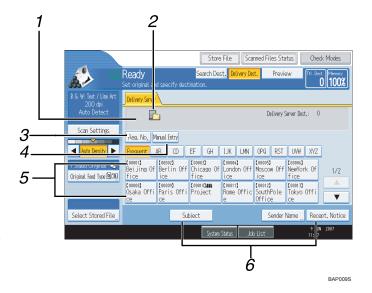

1. Destination Field

The specified destination appears. If more than one destination has been specified, press [▲] or [▼] to scroll through the destinations.

2. Network delivery scanner icon

Indicates that the network delivery scanner screen is displayed.

3. [Reg. No.]

Press this key to specify the destination using a 3-digit registration number.

4. [Manual Entry]

To send a file by e-mail via the delivery server to a destination not registered in the delivery server's Destination List, press this key to display the soft keyboard. Then use the soft keyboard to enter the e-mail address. For details about how to send a file by e-mail via the delivery server, see ScanRouter delivery software manual.

5. Destination List

The list of destinations registered in the delivery server appears. If all of the destinations cannot be displayed, press [▲] or [▼] to switch the screen.

The (*******) symbol indicates a group destination.

6. [Subject] [Sender Name] [Recept. Notice]

Specify the subject, sender, and whether or not to enable Message Disposition Notification for the file to be transmitted.

Basic Operation for Delivering Files

This section describes the basic operation for delivering scan files using the network delivery scanner.


Comportant 🗋

- You must register destinations and senders in advance using the ScanRouter delivery software installed on the delivery server.
- 1. Make sure that no previous settings remain.

If a previous setting remains, press the [Clear Modes] key.

2. If the E-mail screen or Scan to Folder screen appears, switch to the network delivery scanner screen.

For details, see "Switching to the Network Delivery Scanner Screen".

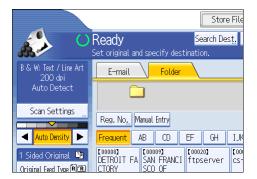

- 3. Place originals.
- 4. If necessary, press [Scan Settings] to specify scanner settings such as resolution and scan size.



For details, see "Various Scan Settings".

5. If necessary, specify the scanning density.

For details, see "Adjusting Image Density".

- 6. If necessary, press [Original Feed Type] to specify settings such as original orientation. For details, see "Setting of Original Feed Type".
- 7. Specify the destination.

You can specify multiple destinations.

For details, see "Specifying Delivery Destinations".

8. If necessary, press [Subject] to specify the e-mail subject.

For details, see "Specifying the Subject of the E-mail to Be Transmitted via the Delivery Server".

9. If necessary, press [Sender Name] to specify the sender.

For details, see "Specifying the Sender".

10. Press the [Start] key.

If you are scanning batches, place the next originals.

Vote

- By pressing [Manual Entry] on the network delivery scanner screen, you can send a file by email via the delivery server's network. For details about entering the e-mail address directly, see "Entering an E-mail Address Manually".
- If you have selected more than one destination, press [▲] or [▼] next to the destination field to scroll through the destinations.
- To cancel a selected destination, display the destination in the destination field, and then press the [Clear/Stop] key. You can cancel a destination selected from the address book by pressing the selected destination again.
- You can use the Message Disposition Notification function when sending e-mail via delivery server. An e-mail is sent to the sender selected in step 9, notifying him/her that the recipient has read his/her e-mail. To specify this setting, press [Recept. Notice].
- To enable the Return Receipt function, you must specify the ScanRouter delivery software settings for sending e-mail by SMTP. For details about specifying this setting, see the ScanRouter delivery software manual. Note, however, that if the e-mail software used at the destination does not support Message Disposition Notification (MDN), e-mail notification that the e-mail has been opened may not be sent.
- Register the sender's e-mail address using the ScanRouter delivery software in advance.
- If you press [Check Modes] before pressing the [Start] key, the initial scanner screen switches
 to the Check Modes screen. You can use the Check Modes screen to check the settings such as
 destinations. For details, see "Check Modes".
- If you press [Preview] and start scanning while [Preview] is highlighted, the Preview screen appears. For details, see "Preview".
- To cancel scanning, press the [Clear/Stop] key.
- You can also store a scan file and simultaneously deliver it. For details, see "Simultaneous Storage and Delivery".

• After an e-mail is sent, the destination, sender, and subject fields will be automatically cleared. If you want to preserve the information in these fields, contact your local dealer.

Reference


- p.102 "Switching to the Network Delivery Scanner Screen"
- p.119 "Various Scan Settings"
- p.128 "Adjusting Image Density"
- p.129 "Setting of Original Feed Type"
- p.103 "Specifying Delivery Destinations"
- p.111 "Specifying the Subject of the E-mail to Be Transmitted via the Delivery Server"
- p.107 "Specifying the Sender"
- p.31 "Entering an E-mail Address Manually"
- p.12 "Check Modes"
- p.14 "Preview"
- p.112 "Simultaneous Storage and Delivery"

Switching to the Network Delivery Scanner Screen

This section explains how to switch the screen to the network delivery scanner screen.

If the E-mail screen or Scan to Folder screen is being displayed, switch to the network delivery scanner screen.

1. Press [Delivery Dest.].

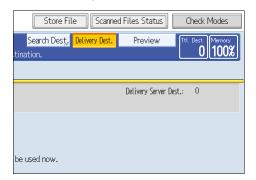

The network delivery scanner screen appears.

Note

• You cannot switch from the E-mail screen or Scan to Folder screen while destinations or senders are being specified. To clear a specified destination, display the destination in the destination field of the E-mail screen or Scan to Folder screen, and then press the [Clear / Stop] key.

Specifying Delivery Destinations

This section explains how to specify delivery destinations.

Selecting Destinations Registered in the Delivery Server's Address Book

This section explains how to select destinations registered in the delivery server's address book

You can select a delivery destination registered in Destination List of the delivery server by any of the following methods:

- Select the destination from the delivery destination list
- Select the destination by entering the registration number
- Select the destination by searching in the delivery server

Selecting a destination from the Destination List

From the destination list, select a destination.

1. In the destination list, press the key including the destination name.

B & W: Text / Line Art 200 dpi	Delivery Server			
Auto Detect	B			
Scan Settings	Reg. No Manual Entry			
🔺 🗛 Auto Density 🕨	Frequent AB CD EF GH IJK			
1 Sided Original 💵 Original Feed Type 🖭	C000013C000023Beijing Of ficeBerlin Off iceC000033 Chicago Of fice			
	C00008) Osaka Offi Paris Offi Project Ron ce e			
Soloct Storod Filo	Subject			

The selected destination is highlighted and also is displayed in the destination field at the top of the screen.

Destinations are registered in the delivery server under captions. The destination list is updated automatically.

Vote

- If the target destination does not appear, press [▲] or [▼] to scroll through the destinations until it does.
- Depending on the security setting, some destinations may not appear in the destination list.

Selecting destinations by entering their registration numbers

Select a destination by entering its Short ID number (registered using the ScanRouter delivery software). For details about how to set Short IDs, see the manuals supplied with the ScanRouter delivery software.

1. Press [Reg. No.].

B & W: Text / Line Art 200 dpi	Delivery Server			
Auto Detect	F	3		
Scan Settings	Reg. No. M	anual Entry		
🔺 🗛 Auto Density 🕨	Frequent /	NB CD	EF GH	IJĸ
1 Sided Original 🕒 Original Feed Type 🖭	[00001] Beijing Of fice	【00002】 Berlin Off ice	[00003] Chicago Of fice	€001 Lor ice
	[00008] Osaka Offi ce	【00009】 Paris Offi ce	[00010] 888 Project	tooi Ron e
Soloct Storad Fila		Suk	viact	

2. Using the number keys, enter the three-digit registration number, and then press the [#] key.

You can also enter a registration number of fewer than three digits.

Example: To enter 009

Press the [9] key, and then press the [#] key.

By pressing [Change], you can change the selected destination.

3. Press [OK].

Note

• To cancel a selected destination, press [▲] or [▼] next to the destination field to scroll through the destinations until the one you want to cancel appears, and then press the [Clear/Stop] key.

Selecting destinations by searching the delivery server's Destination List

In the delivery server's Destination List, you can search for destinations and select them.

1. Press [Search Dest.].

	Store	File	Scar	ned Fil	es Sta		
Ready	Search Des	t. Deliv	ery Dest		Previe		
Set original and specify destination.							
Delivery Server							
<u>P</u>				De	livery Si		
Reg. No., Manual Entry							
Frequent AB CD EI	F GH	IJK	LMN	OPQ	RST		
Beijing Of Berlin Off C	00003] hicago Of ice	【00004】 Londor ice		[00005] Moscov ice	v Off		

2. To search by destination name, press [Name].

To search by comment, press [Comment].

The soft keyboard appears.

You can also search by combining [Name] and [Comment].

3. Enter the beginning of the destination name.

To search by comment, enter the beginning of the comment.

- 4. Press [OK].
- If necessary, press [Advanced Search] to specify the detailed search criteria, and then press [OK].

By pressing [Advanced Search], you can search by [Name] and [Comment]. You can specify search criteria such as [Beginning Word] or [End Word]. You can refine your search using multiple criteria.

Advanced Search				
Specify search conditions.				
Name	Beginning Word	End Word	Exact Match	
Comment	Beginning Word	End Word	Exact Match	

6. Press [Start Search].

Destinations that match the search criteria are displayed.

- 7. Select the destination.
- 8. Press [OK].

Vote

- The Comment search function searches for destinations by comment information, which is a registration item required by the ScanRouter delivery software.
- By pressing [Details], you can view details about the selected destinations.
- Up to 100 destinations can be displayed as search results.
- By pressing [Advanced Search], the following criteria appear:
 - [Beginning Word]: The names which start with the entered character or characters are targeted.

For example, to search for "ABC", enter "A".

• [End Word]: The names which end with the entered character or characters are targeted. For example, to search for "ABC", enter "C". • [Exact Match]: The names which correspond to an entered character or characters are targeted.

For example, to search for "ABC", enter "ABC".

• [Include one Word]: The names which contain an entered character or characters are targeted.

For example, to search for "ABC", enter "A", "B", or "C".

• [Exclude Words]: The names which do not contain an entered character or characters are targeted.

For example, to search for "ABC", enter "D".

Specifying the Sender

This section explains how to specify the e-mail sender when sending a file by e-mail via the delivery server.

You can specify the sender by any of the following methods:


- Select the sender from the sender list
- Select the sender by entering the registration number
- Select the sender by searching the delivery server's Destination List

Selecting a Sender from the Sender List

This section explains how to select a sender from the sender list.

The sender list displays destinations that are registered on the delivery server.

1. Press [Sender Name].

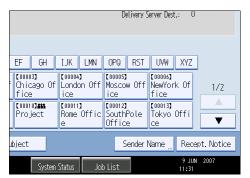


- 2. Select the sender.
- 3. Press [OK].

Selecting the Sender by Entering the Registration Number

Select a sender by entering its Short ID number (registered using the ScanRouter delivery software). For details about how to set Short IDs, see the manuals supplied with the ScanRouter delivery software. 4

1. Press [Sender Name].



2. Press [Registration No.].

Sender Name	Sender Name				
Select name to b	e attached.				
				Clear	
Registration	Registration No				
Frequent	Frequent AB CD EF GH IJK LMN OPQ F				
【00001】 ABCD Compa ny	【00002】 Beijing Of fice	【00003】 Berlin Off ice	【00004】 Chicago Of fice	[00005] London (ice	
[00007] NewYork Of fice	[00008] Osaka Offi ce	【00009】 Paris Offi ce	[00010] *** Project	【00011】 Rome Of e	

3. Using the number keys, enter the three-digit registration number assigned to the required destination folder.

If the entered number is less than five digits, press the [#] key after the last number.

Example: To enter 006

Press the [6] key, and then press the [#] key.

By pressing [Change], you can change the selected destination.

4. Press [OK] twice.

Selecting a Sender by Searching the Delivery Server's Destination List

This section explains how to select a sender by searching the delivery server's Destination List.

1. Press [Sender Name].

Delivery Server Dest.: 0				
EF GH Chicago Of fice	IJK LMN [00004] London Off ice	OPQ RST [00005] Moscow Off ice	UVW XYZ [00006] NewYork Of fice	1/2
[00010] 888 Project	【00011】 Rome Offic e	[00012] SouthPole Office	【00013】 Tokyo Offi ce	
ubject Sender Name Recept. Notice				
System Status Job List 9 JUN 2007				

2. Press [Search].

Sender Name	Sender Name				
Select name to I	e attached.				
				Clear	
Registration	Registration No., Search				
Frequent	AB CD	EF GH	IJK LMN	OPQ F	
【00001】 ABCD Compa ny	【00002】 Beijing Of fice	[00003] Berlin Off ice	【00004】 Chicago Of fice	【00005】 London (ice	
[00007] NewYork Of fice	[00008] Osaka Offi ce	[00009] Paris Offi ce	[00010] 888 Project	【00011】 Rome Of e	

3. To search by destination name, press [Name].

To search by comment, press [Comment].

The soft keyboard appears.

You can also search by combining [Name] and [Comment].

4. Enter the beginning of the sender's name.

To search by comment, enter beginning of the comment.

- 5. Press [OK].
- 6. If necessary, press [Advanced Search] to specify the detailed search criteria, and then press [OK].

By pressing [Advanced Search], you can search by [Name] and [Comment]. You can specify search criteria such as [Beginning Word] or [End Word]. You can refine your search using multiple criteria.

4

Advanced Search			C	- V	Cancel	ОК
Specify search condition	ons.					
Name	Beginning Word	End Word	Exact Match	Include one Word	Exclude Words	
Comment	Beginning Word	End Word	Exact Match	Include one Word	Exclude Words	
			System Status	i Job List		9 JUN 2007 11:33

7. Press [Start Search].

Destinations that match the search criteria are displayed.

8. Select the sender.

9. Press [OK].

Note

- The Comment search function searches for destinations by comment information, which is a registration item required by the ScanRouter delivery software.
- By pressing [Details], you can view details about the selected destinations.
- Up to 100 items can be displayed as the search results.
- By pressing [Advanced Search], the following criteria appear:
 - [Beginning Word]: The names which start with the entered character or characters are targeted.

For example, to search for "ABC", enter "A".

- [End Word]: The names which end with the entered character or characters are targeted. For example, to search for "ABC", enter "C".
- [Exact Match]: The names which correspond to an entered character or characters are targeted.

For example, to search for "ABC", enter "ABC".

• [Include one Word]: The names which contain an entered character or characters are targeted.

For example, to search for "ABC", enter "A", "B", or "C".


• [Exclude Words]: The names which do not contain an entered character or characters are targeted.

For example, to search for "ABC", enter "D".

Specifying the Subject of the E-mail to Be Transmitted via the Delivery Server

This section explains how to specify the e-mail subject when sending a file by e-mail via the delivery server.

1. Press [Subject].



2. Enter the subject.

To enter characters, press [Text Entry].

To enter symbols, press [Symbol Entry].

To add predefined User Text registered on this machine, press [User Text].

For details about entering the text, see "Entering Text", About This Machine.


3. Press [OK].

4

Simultaneous Storage and Delivery

This section explains how to store a file and simultaneously deliver it.

1. Press [Store File].



- 2. Make sure that [Send & Store] is selected.
- 3. If necessary, specify the stored file's information, such as [User Name], [File Name], and [Password].

For details, see "Specifying File Information for a Stored File".

- 4. Press [OK].
- 5. Specify the setting for delivering the file, and then send the file.

For details about delivering a file, see "Basic Operation for Delivering Files".

Vote

- Depending on the security setting, [Access Privileges] may appear instead of [User Name]. For details about specifying [Access Privileges], consult the administrator.
- You can resend stored files. To resend stored files, select the files on the Select Stored File screen, and then send them. For details, see "Sending a Stored File".

Reference

- p.79 "Specifying File Information for a Stored File"
- p.99 "Basic Operation for Delivering Files"
- p.88 "Sending a Stored File"

5. Scanning Originals with the Network TWAIN Scanner

Before Using the Network TWAIN Scanner

This section describes the preparations and procedure for using the network TWAIN scanner.

The TWAIN driver allows you to scan originals on the machine from a client computer via the network.

Comportant 🗋

- To use the network TWAIN scanner, you must install the TWAIN driver, which is on the supplied CD-ROM. For details about installing the TWAIN driver, see "Installing the TWAIN Driver from the Supplied CD-ROM".
- To use the network TWAIN scanner, a TWAIN-compliant application, such as DeskTopBinder, must be installed on the client computer. You can download DeskTopBinder Lite from the Web site and then install it on the client computer.


Reference

• p.115 "Installing the TWAIN Driver from the Supplied CD-ROM"

Outline of the Network TWAIN Scanner

This section outlines the network TWAIN scanner function.

In the TWAIN scanner mode, you can share this machine among multiple computers. Therefore, you don't have to prepare a special computer for scanner or reconnect the scanner and each computer every time you need to use it.

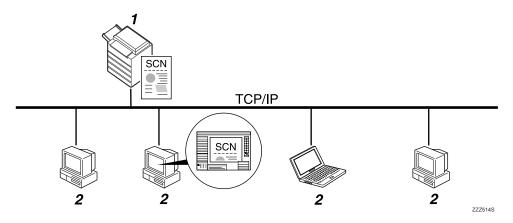

1. This Machine

Scans an original after receiving a scan instruction from a client computer, and then sends the scan file over the network to the client computer.

2. Client Computer

Specifies the scanner settings and controls the scanner using an application, such as DeskTopBinder Lite, that supports the network TWAIN scanner. Receives the files scanned by the machine and displays them using an application that supports the network TWAIN scanner.

Vote

When using the machine as a network TWAIN scanner, you do not need to press the [Scanner] key on the
machine's control panel. The screen switches automatically when you scan an original from a client
computer using the TWAIN driver. To use functions other than the network TWAIN scanner, press [Exit].



Preparing to Use the Network TWAIN Scanner

To use this machine as a network TWAIN scanner, you must first perform the following:

- Check the machine is properly connected to the network
- Configure the network settings in [System Settings]
- Install the TWAIN driver on a client computer
- Install a TWAIN-compliant application on the same client computer

This section explains each of these steps and where you can find more information about them.

Check the machine is properly connected to the network

Check that this machine is properly connected to the network.

For details about how to connect this machine to a network, see "Connecting to the Interfaces", General Settings Guide.

Configure the network settings in [System Settings]

Configure the network settings in [System Settings] according to your environment and how you will be using the machine.

The following procedure explains connecting this machine to an IPv4 network using Ethernet cable.

Note that the settings you must configure will vary depending on your operating environment. For details about network settings and configuration procedures, see "Network Settings Required to Use Network TWAIN Scanner", General Settings Guide.

1. Press the [User Tools/Counter] key, and then press [System Settings].

The System Settings screen appears.

- 2. Press the [Interface Settings] tab.
- 3. Press [Machine IPv4 Address] to specify the machine's IPv4 address.

To specify a static IPv4 address for this machine, press [Specify], and then enter the IPv4 address and subnet mask.

To obtain an IPv4 address from a DHCP server automatically, press [Auto-Obtain (DHCP)].

- 4. Press [IPv4 Gateway Address], and then enter the IPv4 gateway address.
- 5. Press [Effective Protocol], and then make [IPv4] active.
- 6. Press [Exit] twice.

Install the TWAIN driver on a client computer

Install the TWAIN driver on your computer.

For details about installing the TWAIN driver, see "Installing the TWAIN Driver from the Supplied CD-ROM".

Install a TWAIN-compliant application on the same client computer

To use this machine as a network TWAIN scanner, a TWAIN-compliant application, such as DeskTopBinder, must be installed on the client computer.

You can download DeskTopBinder Lite from the Web site and then install it on the client computer.

Note

• If an extended wireless LAN board (optional) is installed, press [LAN Type] on the [Interface Settings] tab, then press [Ethernet], and then configure the network settings.

🖪 Reference 🔵

• p.115 "Installing the TWAIN Driver from the Supplied CD-ROM"

Installing the TWAIN Driver from the Supplied CD-ROM

This section explains how to install the TWAIN driver on a client computer from the supplied "Scanner Driver and Utilities" CD-ROM.

To use the network TWAIN scanner, you must install the TWAIN driver on a client computer.

1. Start Windows, and then insert the driver CD-ROM into the CD-ROM drive of the client computer.

The installer is automatically started and the [Scanner Driver and Utilities] dialog box appears.

2. Click [TWAIN Driver].

3. The installer of the TWAIN driver starts. Follow the instructions.

Note

- Before you start the installation, check the system requirements for the TWAIN driver. For details about the system requirements, see "Software Supplied on CD-ROM".
- You can install the software using the auto-run program. For details about the auto-run program, see "Auto-Run Program ".
- If the installer does not start automatically, see "Auto-Run Program".
- When the installation is complete, a message about restarting the client computer may appear. In this case, restart the client computer.
- After the installation is complete, a folder with the name of the machine in use is added in [Programs] or [All Programs] on the [Start] menu. Help can be displayed from here.
- Notes on using the network TWAIN scanner are provided in "Readme.txt". Be sure to read them before use.

Reference

- p.159 "Software Supplied on CD-ROM"
- p.159 "Auto-Run Program"

Basic Network TWAIN Scanner Operation

This section describes the basic operation for scanning with the network TWAIN scanner.

🔂 Important

- To use the network TWAIN scanner, a TWAIN-compliant application, such as DeskTopBinder and the TWAIN driver must be installed on the client computer.
- You can download DeskTopBinder Lite from the Web site and then install it on the client computer.
- Under the Windows XP SP2/Vista or Windows Server 2003/2003 R2/2008 operating system, when the Windows firewall is enabled, "Cannot find the scanner." or "No response from the scanner." may appear and scanning with the TWAIN scanner may fail. In this case, change the settings of the Windows firewall. For details, see Windows Help.

The following procedure uses Windows XP and DeskTopBinder Lite by way of example.

- 1. On the [Start] menu, point to [All Programs], point to DeskTopBinder, and then click DeskTopBinder.
- 2. On the [Tools] menu, click [Scanner Settings...].
- 3. Click [Select Scanner Driver...].
- 4. Select the name of the machine you want to use in the list, and then click [Select].
- 5. Click [OK].
- 6. Place originals.
- On the [File] menu, point to [Add Document], and then click [Scan...] to display the Scanner Control dialog box.

The Scanner Control dialog box and DeskTopBinder viewer will appear.

 Make settings according to such factors as the type of original, type of scanning, and orientation of the original.

For details, see the TWAIN driver Help.

9. In the Scanner Control dialog box, click [Scan].

Depending on the security setting, if you press [Scan], a dialog box for entering the user name and password may appear.

If there are more originals to be scanned, place the next original, and then click [Continue].

If there are no more originals to be scanned, click [Complete].

- 10. On the [File] menu of the DeskTopBinder viewer, click [Exit].
- 11. Enter the file name, and then click [OK].

The DeskTopBinder viewer closes and the image is stored in DeskTopBinder Lite.

5


Note

- If you have already selected a scanner, you do not need to select the scanner unless you want to change it.
- Using DeskTopBinder, you can edit and print scan files. For more information about DeskTopBinder, see DeskTopBinder manuals.
- The model name of the connected scanner appears in the title bar of the Scanner Control dialog box. If there is more than one scanner of the same model on the network, make sure you have selected the correct scanner. If you have not, click [Select Scanner Driver...], and then select the scanner again. If the correct scanner does not appear in the list, check that the scanner is correctly connected to the network and that its IPv4 address has been specified. If the correct scanner still does not appear, consult the network administrator.
- If you are scanning originals from DeskTopBinder using the network TWAIN scanner, you cannot
 cancel scanning without first saving the documents. If you are no longer using the documents,
 save them first, and then delete them using DeskTopBinder.

Scan Settings

This section explains how to make scan settings.

1. Press [Scan Settings].

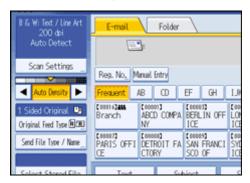

2. Specify resolution, scan size, and other settings, as required.

For details about individual scan setting items, see "Items for Specifying Scan Settings".

Scan Settings		
Scan Type	Resolution	Scan Size
Select Scan Type.		
Black & White: Text	B & W: Text / Line Art	B & W: Text / Photo
Gray Scale		
Full Colour: Text / Photo	Full Colour: Glassy Photo	
Auto Colour Select		

3. Press [OK].

Reference

• p.120 "Items for Specifying Scan Settings"

Items for Specifying Scan Settings

This section describes the items for Scan Settings.

Scan Type

Select a scan type that is appropriate for your original.

[Black & White: Text]

Appropriate to increase OCR readability using an OCR-compliant application.

• [Dropout Colour]

You can select not to scan the following colors: [Chromatic Colour], [Red], [Green], and [Blue]. When you select a color to leave out of the scan, specify its level of coverage. There are five levels. Press [Narrow] to leave out colors that are closest to the specified color. Press [Wide] to broaden the coverage of the specified color and not scan those colors.

[B & W: Text / Line Art]

Standard black and white originals containing mainly characters. Creates scanned images suitable for printing.

[B & W: Text / Photo]

Originals containing a mixture of photographs, pictures and characters (two-value). Creates scanned images suitable for printing.

[Black & White: Photo]

Originals containing photographs and other pictures (two-value). Creates scanned images suitable for printing.

[Gray Scale]

Originals containing photographs and other pictures (multi-value). Creates scanned images suitable for displaying on a computer screen.

[Full Colour: Text / Photo]

Originals for color printing mainly consisting of characters.

[Full Colour: Glossy Photo]

Originals of silver salt photographs and other color pictures.

[Auto Colour Select]

Scans originals by automatically judging the colors of the originals.

🕗 Note 📃

• [Dropout Colour] can be set when [Black & White: Text] is selected for [Scan Type].

- If [Auto Colour Select] is selected, the machine may fail to correctly judge colors depending on the scanning condition or the contents of originals.
- If [High Compression PDF] is selected as the file type, you can select only [Gray Scale], [Full Colour: Text / Photo], or [Full Colour: Glossy Photo] for Scan Type.

Resolution

Select resolution for scanning originals.

Select [100 dpi], [200 dpi], [300 dpi], [400 dpi], or [600 dpi] as the scanning resolution.

Note

 If [High Compression PDF] is selected as the file type, you cannot select [100 dpi] and [600 dpi]. For details about file types, see "Specifying the File Type and File Name".

Reference

• p.138 "Specifying the File Type and File Name"

Scan Size

Select the size of the original to be scanned.

The following items and sizes can be selected:

[Auto Detect]

Scans original sizes using the automatic size detect function.

[Mixed Original Sizes]

Scans a batch of originals with different length by detecting the length of each.

[Custom Size]

Scans in a specified size.

Template size

A3 \bigcirc A4 \bigcirc A4 \bigcirc A5 \bigcirc A5 \bigcirc B4 JIS \bigcirc B5 JIS \bigcirc B5 JIS \bigcirc 11 × 17 \bigcirc 8¹/₂ × 14 \bigcirc 8¹/₂ × 13 \bigcirc 8¹/₂ × 11 \bigcirc 8¹/₂ × 11 \bigcirc 5¹/₂ × 8¹/₂ \bigcirc 8¹/₂ × 8¹/₂ \bigcirc

Note

- Selecting both [Mixed Original Sizes] and [Erase Border] reduces the scanning speed.
- You can specify original sizes of 140 mm (5.5 inches) or larger in [Custom Size].

6


Relationship of original of mixed sizes and scan size

This section explains differences you need to be aware of when scanning originals of different length (such as A3 & A4 or B4 & B5) using the original position setting and size.

- If you select [Mixed Original Sizes], the machine detects the length of each original and scans them.
- If a template size is selected, the machine scans originals at the selected size regardless of the actual size of originals. If an original is smaller than the selected size, the machine applies margins to the scan area.
- If [Auto Detect] is selected for scanning originals from the exposure glass, the machine detects the size of individual originals and scans accordingly.
- If only [Auto Detect] is selected for scanning originals from the ADF, the machine detects the size of the first original and scans all the other originals based on that size.

• Note

• When scanning originals of different length at the same time, place them correctly by referring to the chart below. The paper guides cannot be adjusted to small size originals, which may cause slightly tilted scanning.




Setting procedure of a custom size when scanning an entire original

This section explains how to set a custom size for scanning the entire area of an original.


To display the custom size setting screen, on the initial scanner screen, press [Scan Settings] > [Scan Size] > [Custom Size].

The following custom size original is used to explain the method for specifying the scan settings on the custom size setting screen.

Custom size original to be scanned



Scan settings on the custom size setting screen

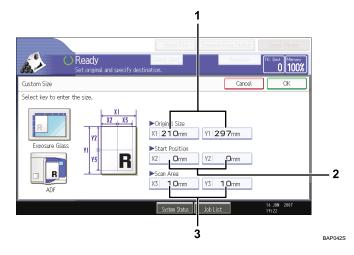

1. Original Size (X1 and Y1)

Specify the length and width of the original. Enter the actual width and length in [X1] and [Y1] respectively, and then press the [#] key.

2. Start Position (X2 and Y2)

Set Start Position to 0 mm (0 inch).

Enter "0" in both [X2] and [Y2], and then press the [#] key.


3. Scan Area (X3 and Y3)

Specify the same values as Original Size (X1, Y1).

Enter the same values in [X3] and [Y3] as Original Size (X1 and Y1 respectively), and then press the [#] key.

Note

- For X1 and Y1, you can specify 140 mm (5.5 inches) or larger.
- To scan an original that is smaller than 140 mm (5.5 inches), configure the settings as though you were scanning part of an original that is larger than 140 mm (5.5 inches). For example: to scan a CD label on the exposure glass, specify X1~X3 and Y1~Y3 based on the chart below. For details about scanning procedures, see "Setting procedure of a custom size when scanning part of an original".

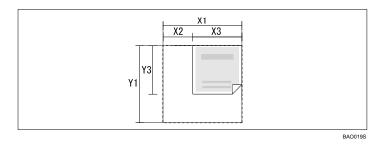

Reference

• p.124 "Setting procedure of a custom size when scanning part of an original"

Setting procedure of a custom size when scanning part of an original

This section explains how to specify a custom size for scanning part of an original.

To scan part of an original, measure Original Size (X1 and Y1), Start Position (X2 and Y2), and Scan Area (X3 and Y3) on the surface of the original, and then enter those values in the same order on the custom size setting screen.

To display the custom size setting screen, on the initial scanner screen, press [Scan Settings] > [Scan Size] > [Custom Size].

Measuring methods differ depending on where the original is placed and the orientation it is placed in. For details about how to measure Original Size (X1 and Y1), Start Position (X2 and Y2), and Scan Area (X3 and Y3) correctly, see "How to measure sizes".


Enter the sizes while referring to "Scan settings on the custom size setting screen".

How to measure sizes

Orientation and placement of original	Measuring method for scanning the "R" section
In the 🖻 n orientation on the exposure glass or in the ADF.	Y1 Y2 Y3 BACHAS

Orientation and placement of original	Measuring method for scanning the "R" section
In the 🖻 orientation in the ADF.	$\begin{array}{c c} X1 \\ \hline X2 \\ \hline Y1 \\ \hline Y3 \\ \hline BACOUSS \end{array}$
In the 🖻 orientation on the exposure glass.	Y1 Y2 BACOIDS

Scan settings on the custom size setting screen

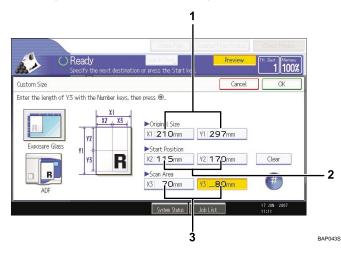

1. Original Size (X1 and Y1)

Specify the original's entire size.

Enter the actual values in [X1] and [Y1] while referring to "How to measure sizes", and then press the [#] key.

2. Start Position (X2 and Y2)

Specify the scanning start position. Enter the actual values in [X2] and [Y2] while referring to "How to measure sizes", and then press the [#] key.

3. Scan Area (X3 and Y3)

Specify sizes of the area you want to scan.

Enter the actual values in [X3] and [Y3] while referring to "How to measure sizes", and then press the [#] key.

Note

 When scanning originals using [Custom Size], you cannot enter specific values in [Original Size] and [Start Position]. To configure the scan area, specify [Scan Size] and [Start Position] first, and then [Original Size].

How to set originals to scan them by custom size

This section explains how to place originals you want to scan at Custom size.


Original Orientation setting

Under [Original Orientation], select [BR] or [BR] according to the orientation of your original. To display [Original Orientation], on the initial scanner screen, press [Original Orientation]. For details, see "Setting of Original Feed Type".


Placing an original

Place originals face up in the ADF; face down on the exposure glass.

Original Orientation is [^R^R]

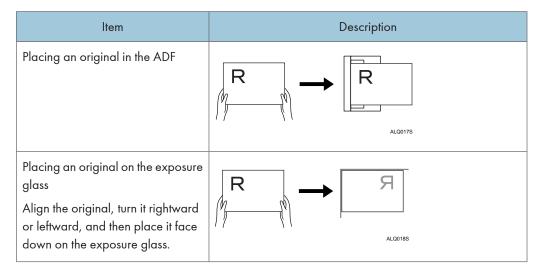

Original Orientation is [🖃 🕮]

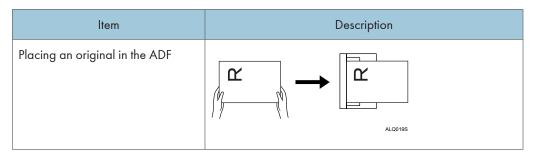

ltem	Description
Placing an original on the exposure glass Turn the original over, place it face down on the exposure glass, and then align it with the top left corner of the exposure glass.	

Reference

• p.129 "Setting of Original Feed Type"

Edit

Make editing settings.

[Erase Border]

Deletes the borders of the scanned original according to the specified width.


If you select [Same Width], you can specify a uniform width for deletion all around the original (top, bottom, left, and right sides). If you select [Different Width], you can specify a different width for deletion for each side.

Adjusting Image Density

This section explains how to adjust image density.

To adjust image density, press [◀] or [▶], at the left and right of [Auto Density]. These buttons increase or decrease the image density in single increments up to 7.

Selecting [Auto Density] corrects scanning density to improve resolution of paper types such as non-white paper like newspaper or transparent originals.



Note

• When scanning originals in full color, you can specify the [Auto Density] level in [Background Density of ADS (Full Colour)] under [Scanner Features]. For details, see "Scanner Features", General Settings Guide.

Setting of Original Feed Type

This section explains Original Feed Type settings such as orientation and scan sides of originals.

Original Orientation

This section explains how to correctly display the top/bottom orientation of scanned originals on a client computer screen.

- 1. Press [Original Feed Type].
- 2. Press [BR] or [BR] to select the same orientation as that of original.

Original Feed Type		
Select item.		
► Original Orientation		
R CE		
▶Original Settings 1 Sided Original	2 Sided Original	
1 2		


3. Press [OK].

Placing Originals

To correctly display the top/bottom orientation of the scanned original on a client computer, the placement of the original and the settings made on the control panel must match.

Place originals correctly by referring to the following table:

Exposure Glass

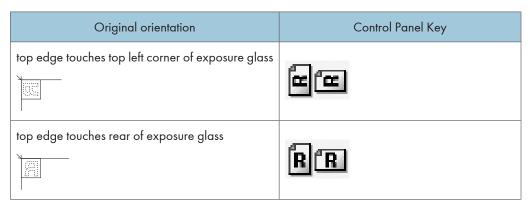

ADF

Original orientation	Control Panel Key
top edge placed first	88
top edge touches rear of ADF	RR

Note

- Originals are normally rectangular (1) or horizontally long (1). However, the table above uses squares to make original orientation easier to understand. Even if the actual shape of the original is different, the combination of original orientation and the orientation specified on the scanner driver does not change.
- When you specify full color, gray scale, or [Auto Colour Select] for Scan Type, and single page TIFF/JPEG or multi-page TIFF is selected as the file type, refer to the table below for how to place originals. Originals placed in orientations that are not recommended in the table might appear incorrectly top/bottom oriented on client computer displays.

How to set an original

Place	Original orientation
Placing an Original on the Exposure Glass	
Placing an Original in the ADF	

Original Settings

This section explains the settings for the scanning the sides of originals.

One-sided original

This section explains the settings for scanning only one side of originals.

1. Press [Original Feed Type].



- 2. In [Original Settings], select [1 Sided Original].
- 3. Press [OK].

Two-sided original

This section explains the settings for scanning both sides of originals.

- 1. Press [Original Feed Type].
- 2. In [Original Settings], select [2 Sided Original].
- 3. In [Page Opening Orientation], select [Top to Top] or [Top to Bottom] according to the binding orientation of the originals.



Binding orientation and required page opening orientation

Binding orientation	Page opening orientation
RSRS	Top to Top
R S	Top to Bottom

If the last page of the last original is blank, in [Last Page], select [1 Side] or [2 Sides].
 To skip the last page, select [1 Side].

To scan the last page as blank page, select [2 Sides].

5. Press [OK].

Note


• If you selected [Divide], the setting made here is applied to the last page of each batch of divided originals.

Stamp

This section explains the procedure for stamping originals that are scanned from the ADF. The stamp indicates the originals have been scanned.

When scanning a document using ADF, the machine can stamp a circle mark at the bottom of the original. When scanning a two-sided document, the document is marked at the bottom of the front page and top of the rear page.

This function is very useful when you want to distinguish scanned originals.



C Important

- To enable stamping, you must install the stamp cartridge.
- 1. Press [Original Feed Type].

2. Press [Stamp].

	OK
	Stamp
	Batch
tion Top to Bottom	SADF

3. Press [OK].



- Last pages are stamped even if you selected not to scan the last page.
- Stamping may continue if scanning is interrupted, depending on the cause of interruption.
- Replace the stamp cartridge when stamp begins to fade. For details, see "Replacing the Stamp Cartridge", Troubleshooting.

Batch, SADF

This section explains settings for scanning multiple originals in several batches.

To scan the originals as a single file, select [Batch].

To scan the originals individually in the ADF, select [SADF].

- If you select [Batch], scanning starts as soon as you place the additional originals and press the [Start] key. When all the originals have been scanned, press [#]. If you select [Batch], regardless of the default settings, the machine waits until additional originals are placed.
- If [SADF] is selected, scanning starts as soon as you place additional originals in the ADF. Select
 which operation the machine performs while waiting for additional originals in [Wait Time for Next
 Original(s): SADF] under [Scanner Features]. For details about [Wait Time for Next Original(s):
 SADF], see "Scanner Features", General Settings Guide.
- 1. Press [Original Feed Type].

6

2. Select [Batch] or [SADF].

Stamp
Batch
SADF
Divide _

3. Press [OK].

Vote

- For more details about procedures, see "Scanning Multiple Pages of Originals as One File".
- If [SADF] is selected, scanning starts as soon as you place additional originals in the ADF. However, in the following cases you must press the [Start] key to start scanning additional originals.
 - After scanning additional originals using the exposure glass
 - After changing settings while waiting for additional originals
 - After opening/closing the ADF

Reference

• p.136 "Scanning Multiple Pages of Originals as One File"

Divide

This section explains settings for dividing multiple originals by a specified number of pages and then sending them.

- 1. Press [Original Feed Type].
- 2. Press [Divide].

	Batch
	SADF
	Divide
	12 JUN 2007
System Status Job List	14:42

3. Press [Change], and then use the number keys to enter the number of pages you want to divide the job into sets of.

Divide	Can
Select item.	
►Number of Originals to be Divided	
per 1 sheet(s) Change	

- 4. Press the [#] key.
- 5. If necessary, press [Division Check].

When you select [Division Check], if the originals were not scanned in order due to a paper jam or multi-sheet feed, a screen for stopping or continuing scanning appears at the end of the scan.

6. Press [OK] twice.

The current settings are displayed.



• If the last page of a batch of divided two-sided originals is blank, you can skip that page. To skip scanning, in [Last Page] under [2 Sided Original], select [1 Side]. To scan the last page as a blank page, select [2 Sides]. For details, see "Two-sided original".

Reference

• p.131 "Two-sided original"

Scanning Multiple Pages of Originals as One File

This section explains the procedure for sending multiple originals as a multi-page file or storing them as a single stored file.

Comportant 🗋

- To send multiple originals as a multi-page file, in [Send File Type / Name], select a multi-page file type. For details about file types, see "Specifying the File Type".
- 1. Press [Original Feed Type].
- 2. Select [Batch] or [SADF].

To scan originals using the exposure glass, select [Batch]. To scan originals using the ADF, select [SADF]. For detail about [Batch] and [SADF], see "Batch, SADF".

		Batch
		SADF
		Divide
System Status	Job List	12 JUN 2007 14:542

- 3. Press [OK].
- 4. Place originals.
- 5. Make settings for sending by e-mail or Scan to Folder, delivering, or storing.
- 6. Press the [Start] key to scan originals.

If [Batch] is selected, place additional originals, and then press the [Start] key.

If [SADF] is selected, scanning starts automatically when you place additional originals.

Repeat this step until all originals are scanned.

7. After all originals are scanned, press the [#] key.

Storing or transmission starts.

Vote

- If [Batch] is selected, originals can be scanned using the ADF.
- When scanning originals using the exposure glass, depending on the settings for [Wait Time for Next Orig.: Exposure Glass] under [Scanner Features], the machine can wait for additional originals even if [Batch] is not selected in [Original Feed Type]. For details about [Wait Time for Next Orig.: Exposure Glass], see "Scanner Features", General Settings Guide.

- If, under [Scanner Features], [Set Wait Time] is set for [Wait Time for Next Orig.: Exposure Glass] or [Wait Time for Next Original(s): SADF], place additional originals within the specified time. When the countdown ends, transmission or storage starts automatically. To start transmission or storage before the countdown is completed, press the [#] key. Countdown is canceled if Scan Settings or other settings are changed in the meantime. Place additional originals, and then press the [Start] key. The machine scans the originals and the countdown is resumed. For details about [Wait Time for Next Orig.: Exposure Glass] and [Wait Time for Next Original(s): SADF], see "Scanner Features", General Settings Guide.
- If [SADF] is selected, scanning from the exposure glass is enabled after scanning from the ADF. If this happens, you must press the [Start] key to start scanning.

🖪 Reference 🔵

- p.138 "Specifying the File Type"
- p.133 "Batch, SADF"

Specifying the File Type and File Name

This section explains the procedure for specifying the file type, file name, and security for PDF files.

Specifying the File Type

This section explains the procedure for specifying the file type of a file you want to send. File types can be specified when sending files by e-mail or Scan to Folder, and sending stored files by e-mail or Scan to Folder.

You can select one of the following file types:

• Single Page: [TIFF / JPEG], [PDF], [High Compression PDF]

If you select a single-page file type when scanning multiple originals, one file is created for each single page and the number of files sent is the same as the number of pages scanned.

• Multi-page: [TIFF], [PDF], [High Compression PDF]


If you select a multi-page file type when scanning multiple originals, scanned pages are combined and sent as a single file.

Selectable file types differ depending on the scan settings and other conditions. For details about file types, see "Notes About and Limitations of File Types".

1. Press [Send File Type / Name].

8 & W: Text / Line Art 200 doi	E-mail Folder			
Auto Detect	2	7		
Scan Settings	Reg. No, M	anual Entry		
🔺 Auto Density 🕨	Frequent	48 00	EF GH	IJ
1 Sided Original 🖳 Original Feed Type 🗐 🕮	Coost (Jan) Branch	(00001) ABCD COMPA NY	EEFLIN OFF	LON LON
Send File Type / Name_	(00007) PARIS OFFI CE	COURCE DETROIT FA CTORY	(00009) SAN FRANCI SCO OF	SYE ICE
Soloct Stored File	Tout		hight	

2. Select a file type.



3. Press [OK].



- To deliver files, specify the file type using the delivery server computer. For details, see the manuals provided with the ScanRouter delivery software.
- If you select [Store Only] under [Store File], you cannot specify the file type.
- If you select [Send & Store] under [Store File], files are sent by e-mail or Scan to Folder in the specified file type. However, files cannot be stored in the specified type instead, they are automatically stored in one of the following file types, depending on the Compression and Scan Type settings.
 - JPEG

Under [Scanner Features], [Compression (Gray Scale / Full Colour)] or [Compression (Gray Scale)] is set to [On], and originals are scanned in full color or gray scale.

• TIFF

All other scannings

 High Compression PDF reduces the file's data volume without loss of character legibility. For details about the limitations of High Compression PDF, see "Notes About and Limitations of File Types".

Reference

• p.139 "Notes About and Limitations of File Types"

Notes About and Limitations of File Types

Depending on the file type you select, the following limitations will apply.

Single Page [TIFF / JPEG]

• Originals scanned in black and white are sent as TIFF files.

- According to the settings specified for [Compression (Gray Scale / Full Colour)] or [Compression (Gray Scale)] under [Scanner Features], originals scanned in full color or gray scale are sent in one of the following file types:
 - [On] : JPEG file
 - [Off] : TIFF file

Multi-page [TIFF]

- When full color, gray scale, or [Auto Colour Select] is specified under [Scan Type] and [Compression (Gray Scale / Full Colour)] or [Compression (Gray Scale)] is set to [On] under [Scanner Features], you cannot select [TIFF] under [Multi-page].
- Even if you select [TIFF] under [Multi-page], files stored in JPEG format are automatically changed to multi-page PDF files and then sent.

High Compression PDF

- You cannot select [High Compression PDF] if:
 - [Send & Store] is selected under [Store File].
 - [Black & White: Text], [Text], [B & W: Text / Line Art], [Text / Line Art], [B & W: Text / Photo], [Text / Photo], [Black & White: Photo], [Photo], or [Auto Colour Select] is selected under [Scan Type].
 - [100 dpi] or [600 dpi] is selected as the resolution.
 - [Preview] is selected.
 - The machine is working with ScanRouter delivery software and the Capture function is in use. For details about the capture function, see the manuals provided with the ScanRouter delivery software.
- Adobe Acrobat Reader 5.0 / Adobe Reader 6.0 and later versions support High Compression PDF.
- High Compression PDF files created by this machine cannot be printed using PDF Direct Print function.
- High Compression PDF files cannot be displayed correctly using DeskTopBinder Easy Viewer.

Specifying the File Name

This section explains the procedure for specifying the file name.

Scanned file will be given a file name consisting of the time and date of scanning, 4-digit page number, etc.

• Single-page and divided multi-page files are assigned file names that contain the date and time of scanning and a four-digit page number. An underscore is inserted between the date and time and the four-digit page number.


(Example: For a file scanned in single-page TIFF at 10 ms, 15 sec., 15:30 hours on Dec. 31, 2020, the file name will be 20201231153015010_0001.tif)

• Multi-page files are given file names that contain the time and date of scanning.


(Example: For a file scanned in multi-page TIFF at 10 ms, 15 sec., 15:30 hours on Dec. 31, 2020, the file name will be 20201231153015010.tif)

If necessary, you can change the file name.

1. Press [Send File Type / Name].

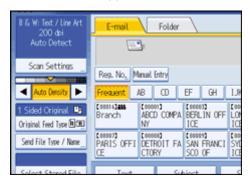

2. Press [File Name].

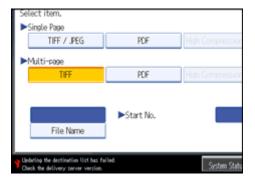


The soft keyboard appears.

- 3. Enter a file name.
- 4. Press [OK] twice.

Changing the starting digit of file name serial numbers

A single-page file is assigned a serial number after the file name. The starting number of this serial number can be changed as follows:

1. Press [Send File Type / Name].

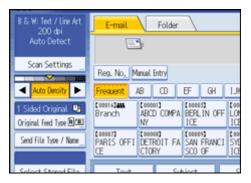

2. Press [Change] to the right of the entry box.

High Correcession PC		PDF File Security	Settings _	
High Compression PC	5			
	0001	Change		
System Status	Job List		12 JUN 14549	2007

- 3. Using the number keys, enter the starting digit of the serial number.
- 4. Press the [#] key.
- 5. Press [OK].

Vote

- You can change the starting digit only if other than [Single Page] is selected as the file type.
- You can change the number of digits in the serial number. Change the number under [Scanner Features], [No. of Digits for Single Page Files]. You can select 4 or 8. For details, see "Scanner Features", General Settings Guide.

Security Settings to PDF Files

This section explains security settings for PDF files.

Use security settings to prevent unauthorized access to PDF files.

🔂 Important


• Security settings can be made for PDF and High Compression PDF files only.

Encrypting PDF files


Set a password to protect and encrypt a PDF file. Only users who have the password can open and decrypt the PDF file.

Comportant 🗋

- Encryption is possible only for scan files sent by e-mail or Scan to Folder.
- You cannot open an encrypted file without a password. Make sure you do not forget a file's password.
- 1. Press [Send File Type / Name].

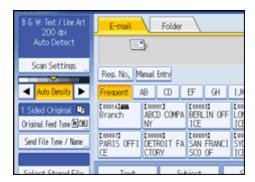

- 2. Check that [PDF] or [High Compression PDF] is selected.
- 3. Press [Security Settings].
- 4. Select [Encryption].
- 5. In [Encrypt Document], select [On].

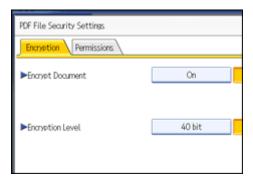

6. In [Password], press [Enter].

ings			Car
issions			
	On	Off	
	Password	Enter	
	40 bit	128 bit	

7. Enter a password, and then press [OK].

The password entered here will be required to open the PDF file.

- 8. Enter the password again, and then press [OK].
- 9. In [Encryption Level], select [40 bit] or [128 bit].
- 10. Press [OK] twice.

Note

- A document password cannot be the same as the Master password.
- You can enter up to 32 alphanumeric characters for a document password.
- PDF files created under the [128 bit] Encryption Level cannot be viewed using Adobe Acrobat Reader 3.0 and 4.0.
- If [Low Resolution Only] is selected as the print permission, you cannot select [40 bit] as the PDF encryption level.


Changing security permissions for PDF files

Set a Master Password to restrict unauthorized printing, changing, copying, or extracting of a PDF file's content. Only users who have the Master Password can reset or change these restrictions.


C Important

- Encryption is possible only for scan files sent by e-mail or Scan to Folder.
- You cannot reset or change a file's restriction setting without the Master Password. Make a note of the Master Password in a secure place.

1. Press [Send File Type / Name].



- 2. Check that [PDF] or [High Compression PDF] is selected.
- 3. Press [Security Settings].
- 4. Select [Permissions].
- 5. In [Master Password], select [Set].



6. In [Password], press [Enter].

sings		Ca
issions		
	Set	Do not Set
	Password	Enter
	Prohibit	Allow
	Prohibit	Allow
d Extraction	Prohibit	Allow

7. Enter a password, and then press [OK].

The password entered here will be required to change the security settings of the PDF file.

- 8. Enter the password again, and then press [OK].
- 9. Select the security permission setting.

You can specify the following security settings:

- Print permission: [Prohibit], [Allow], or [Low Resolution Only]
- Editing permission: [Prohibit] or [Allow]
- Copying or extracting content permission: [Prohibit] or [Allow]

and the second se	d specify destination.		
OF File Security Settings			Carcel OK
Exception Permission			
Master Reseword	Set	Do not Set	
	Password	Enter	
Permissions			-
Printing	Prohibit	Allow	Low Resolution Only
Owners	Prohibit	Allow	
Contact Copying and Extraction	Prohibit	Allow	

10. Press [OK] twice.

Note

- The [Password] and [Master Password] cannot be the same.
- You can enter up to 32 alphanumeric characters for a Master Password.
- If [40 bit] is selected as the PDF encryption level, you cannot select [Low Resolution Only] as the print permission.

Programs

You can register frequently used settings in the machine memory and recall them for future use.


Note

- You can register up to 10 programs for the scanner mode.
- Programs are not deleted by turning the power off or by pressing the [Clear Modes] key unless the content is deleted or newly registered.
- The following settings can be registered to programs: Scan Settings, 1 Sided/2 Sided Original, Top to Top/Top to Bottom, 1 Side/2 Sides for the Last Page, Divide, Original Orientation, File Type, Batch/SADF, Stamp, Store File, Preview, Reception Notice, and Security (E-mail Encryption and Signature).
- Setting made on the simplified display cannot be registered to a program.

Registering Frequently Used Setting

To register frequently used settings in a program:

- 1. On the initial scanner screen, make the settings you want to register in a program.
- 2. Press the [Program] key.

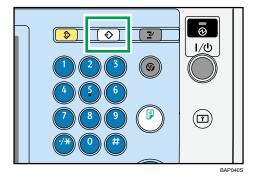

3. Press [Program].

Program (Scanner)		
Select No. to program.		
♦ Recall	Program	Change Name
⊕001 Original ori	entation	⊗002 Previe
@003 Security		004 * Not
005 * Not Program	nmed	006 * Not
007 * Not Programmed		008 * Not
009 * Not Program	nmed	010 * Not

4. Select the number of the program in which you want to register the settings.

Program numbers with ⇒ already have settings in them.

- 5. Enter the program name.
- 6. Press [OK].

The Program screen reappears. When the settings are successfully registered, ⇒appears on the left side of the registered program number and the program name appears on the right side. The initial screen reappears after a moment.

Recalling a Registered Content

To recall settings registered in a program and use them for scanning:

- 1. Press the [Program] key.
- 2. Press [Recall].

Program (Scanner)	-			
Select program No. to recall.				
◆ Recall ◆ Program Cha	ange Name			
♦001 Original orientation	⊛002 Previe			
003 Security	004 ¥ Not			
005 * Not Programmed	006 ¥ Not			
007 X Not Programmed	008 ¥ Not			
009 X Not Programmed	010] # Not			

3. Press the number of the program you want to recall.

Settings registered in the program are recalled and the initial scanner screen reappears.

Settings are not registered in numbers that appear without ϑ .

4. Place originals, and then press the [Start] key.

Changing a Registered Program

To change the settings registered to a program:

- 1. Press the [Program] key.
- 2. Press [Recall].
- 3. Press the number of the program you want to change.

Settings registered in the program are recalled and the initial scanner screen reappears.

4. Change settings of the program.

- 5. Press the [Program] key.
- 6. Press [Program].
- Press the number of the program whose settings you changed or the number of a different program in which you want to register the changed settings.
- 8. If you select a program that is already registered, a confirmation message appears. To overwrite the program, press [Yes].

If you select a new program number, you can omit this step. Proceed to the next step.

- 9. Enter a program name.
- 10. Press [OK].


If overwritten, the registered program is deleted.

The new program name appears briefly, and then the initial screen reappears after a moment.

Deleting a Program

To delete a registered program:

- 1. Press the [Program] key.
- 2. Press [Delete].

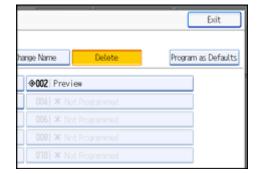

3. Press the number of the program you want to delete.

A confirmation screen appears.

4. Press [Yes].

The program is deleted, and the initial screen reappears after a moment.

Changing the Registered Program Name

To change the name of a registered program:

1. Press the [Program] key.

2. Press [Change Name].

change the name of.		
Program	Change Name	Delete
antation	♦002 Prev	view
	004 × N	lot Programmed
	006 × N	
	008 × N	

- 3. Press the number of the program whose name you want to change. The soft keyboard appears.
- 4. Enter a new program name.
- 5. Press [OK].


The new program name appears briefly, and then the initial screen reappears.

Registering the Default Values of the Scanner's Initial Display

This section explains how to set defaults for the initial screen, which appears when the machine is turned on or when settings are cleared or reset.

The following settings can be registered as defaults: Scan Settings, 1 Sided/2 Sided Original, Top to Top/ Top to Bottom, 1 Side/2 Sides for the Last Page, Divide, Original Orientation, File Type, Batch/SADF, Stamp, Store File, Preview, Reception Notice, and Security (E-mail Encryption and Signature).

- 1. Make the necessary scan settings on the initial screen.
- 2. Press the [Program] key.



3. Press [Program as Defaults].

e Name Delete	Program as Defau
002 Preview	
004 * Not Programmed	
006 ¥ Not Programmed	
008 ¥ Not Programmed	

4. Press [Program].

A confirmation screen appears.

5. Press [Yes].

The current settings are registered as defaults, and then the initial screen reappears.

Note

• To restore the initial screen's original default settings, press [Restore Factory Defaults].

151

• Default settings for the initial screen can be registered for normal screens and simplified displays respectively.

Scan Settings When Using TWAIN Scanner

This section explains how to specify original orientation and scan setting for a bundle of mixed size originals when using the TWAIN scanner.

Setting Original Orientation on the TWAIN Scanner

To correctly display the top/bottom orientation of the scanned original on a client computer, the placement of the original and the settings made in the Scanner Control dialog box must match.

1. Open the Scanner Control dialog box.

For details about how to open the Scanner Control dialog box, see "Basic Network TWAIN Scanner Operation".

- 2. In the [Original Scan Method:] list, select the place where the original is placed.
- 3. In the [Orig.Orientn.:] list, select [I Long Edge] or [I Ching Edge].
- 4. In the [Orientation:] list, select [↔ Bight 90 deg./ ↔ Bight 90 deg.], [↓ Left 90 deg. / ↔ Left 90 deg.], [↓ Standard 0 deg. / ↓ R Standard 0 deg.], or [↓ 180 deg. / ↓ N 180 deg.].
- If an original is placed in the ADF, from the drop down menu of [Scan Settings:], select [1 Sided], [2 Sided(Top to Top)], or [2 Sided(Top to Bottom)].

Reference

p.117 "Basic Network TWAIN Scanner Operation"

Placing Originals

The following table shows the relationship between the original orientation and the Scanner Properties dialog box settings:

Exposure Glass

Original Orientation	TWAIN Scanner Control Dialog Box Key
top edge touches top left of exposure glass	
	🖨 🖂 Left 90 deg.
This orientation is the TWAIN driver's	
standard setting. Place originals in this orientation normally.	

Original Orientation	TWAIN Scanner Control Dialog Box Key
top edge touches rear of exposure glass	🖨 🗐 Standard 0 deg.
bottom edge touches left side of exposure glass	👍 🔄 Right 90 deg.
bottom edge touches top of exposure glass	🖨 🔣 180 deg.

ADF

Original Orientation	TWAIN Scanner Control Dialog Box Key
top edge of original placed first	🖨 🕿 Left 90 deg.
top edge touches rear of ADF	🖨 🖪 Standard 0 deg.
bottom edge touches left side of ADF	두 🗩 Right 90 deg.
bottom edge touches top of ADF	(교원 180 deg.

Note

- Originals are normally rectangular (E) or horizontally long (E). However, the table above uses squares to make original orientation easier to understand. Even if the actual shape of the original is different, the combination of original orientation and the orientation specified on the scanner driver does not change.
- For details about the Scanner Control dialog box, see the TWAIN driver Help.
- Depending on the settings, originals of different sizes are scanned differently.

When Scanning Originals of Mixed Sizes Using TWAIN Scanner

This section explains the differences between scanning mixed-size originals using the TWAIN scanner and normal scanning.

- If [Auto detect(Mixed-size)] is selected in the [Original Size:] list, the machine detects the length of each original and then scans them.
- If [Auto detect(Uni-size)] is selected in the [Original Size:] list, the machine detects the size of the first original of the batch and scans all subsequent originals at that size.



• The paper guides cannot be adjusted to small size originals, which may cause slightly tilted scanning.

6. Various Scan Settings

7. Appendix

Relationship between Resolution and Scan Size

This section explains the relationship between resolution and scan size.

Resolution and scan size are inversely related. The higher the resolution (dpi) is set, the smaller the area that can be scanned. Conversely, the larger the scan area, the lower the resolution that can be set.

The relationship between the scanning resolution and scan size is shown below. If the combination is unreadable, "Exceeded max. data capacity. Check the scanning resolution, then press the Start key again." appears on the machine's control panel display. Change the condition until scanning is enabled.

Vote

• Image compression level can limit Maximum image size.

When Using the E-mail, Folder Sending, Storing, or Network Delivery Functions

This section explains the relationship between resolution and scan size when using the e-mail, Scan to Folder, storing, or network delivery scanner functions.

If [Black & White: Text], [Text], [B & W: Text / Line Art], [Text / Line Art], [B & W: Text / Photo], [Text / Photo], [Black & White: Photo], [Photo], or [Gray Scale] is selected for Scan Type:

All combinations up to A3 and 600 dpi can be scanned.

If [Full Colour: Text / Photo] or [Full Colour: Glossy Photo] is selected as Scan Type:

The scan size determines the maximum resolution possible.

Refer to the table below for the maximum resolution available for each scan size.

Scan size and maximum resolution

Scan size	Maximum resolution (dpi)
A3, B4, 11×17, Legal (8 ¹ / ₂ ×14), 8 ¹ / ₂ ×13	400
A4, A5, A6, A7, B5, B6, Letter $(8^1/2 \times 11)$, $5^1/2 \times 8^1/2$	600

Note

- Enter B6, A6, and A7 sizes directly.
 - B6 (128 mm/5.0 inches × 182 mm/7.0 inches)
 - A6 (105 mm/4.0 inches × 148 mm/5.8 inches)
 - A7 (74 mm/2.9 inches × 105 mm/4.1 inches)

When Using as a TWAIN Scanner

This section explains the relationship between resolution and scan size when using the machine as a TWAIN scanner.

To specify the scan area or resolution on the machine you are using as a network TWAIN scanner directly, see the TWAIN driver Help.

If [Binary(Text)] / [Binary(Photo)] / [Gray Scale] is selected in [Col./Grad.:].

The scan size determines the maximum possible resolution.

Refer to the table below for the maximum resolution available for each scan size.

Scan size and maximum resolution

Scan size	Maximum resolution (dpi)
A3, 11×17, B4	600
Legal ($8^{1}/_{2} \times 14$), $8^{1}/_{2} \times 13$	700
A4, Letter (8 ¹ / ₂ ×11)	800
В5	900
A5, A6, B6, 5 ¹ / ₂ ×8 ¹ / ₂	1200

If [8 Colors] / [8 Colors(Photo)] is selected in [Col./Grad.:]

All combinations up to A3 and 600 dpi can be scanned.

If [16770K colors] is selected in [Col./Grad.:]

The scan size determines the maximum resolution possible.

Refer to the table below for the maximum resolution available for each scan size.

Scan size and maximum resolution

Scan size	Maximum resolution (dpi)
A3, 11×17, B4	400
Legal (8 ¹ / ₂ ×14), 8 ¹ / ₂ ×13	500
A4, A5, A6, B5, B6, Letter $(8^1/2 \times 11)$, $5^1/2 \times 8^1/2$	600

Note

• Certain original types and resolution settings can reduce scanning quality.

Software Supplied on CD-ROM

This section explains the applications on the supplied CD-ROM.

Auto-Run Program

This section explains the auto-run program.

When the CD-ROM is inserted into a client computer running Windows 2000/XP/Vista, or Windows Server 2003/2003 R2/2008, the installer starts up automatically (auto run) to install various software.

Note

- For installation log on as an Administrators group member.
- Auto-run program may not automatically work with certain operating system settings. If this happens, start "Setup.exe" on the CD-ROM root directory.
- To disable auto-run, set CD-ROM while pressing the Shift key. Keep the Shift key pressed until the computer finishes reading from the CD-ROM.
- If [Cancel] is pressed during installation, the installation of all the software thereafter will be stopped. If cancelled, reinstall the remaining software after restarting the client computer.

TWAIN Driver

This section tells you the file path to the TWAIN driver and the TWAIN driver's system requirements.

You must install this driver if you want to scan originals or use the machine as a network TWAIN scanner.

File path

The TWAIN driver is stored in the following folder on the CD-ROM:

\DRIVERS\TWAIN

System requirements

• Computer hardware

PC/AT-compatible machines that support the operating system properly

Operating system

Microsoft Windows 2000/XP/Vista

Microsoft Windows Server 2003/2003 R2/2008

Display resolution
 800 × 600 pixels, 256 colors or higher

Values of Various Set Items for Transmission/ Storage/Delivery Function

This section explains the values of various transmission/storage/delivery function settings.

Note

• Depending on the type or settings of the file or original, you may not be able to specify the destination or enter the maximum number of characters stated below.

Transmission Function

This section explains the values of transmission function settings.

Sending E-mail

The following table tells you the maximum values of the e-mail sending function settings.

Values of Set Items for Sending by E-mail

ltem	Maximum value	Comments
Number of subject line characters	128 alphanumeric characters	_
Number of e-mail message characters	80 alphanumeric characters	This is the total number of characters selected from the list and the number of characters entered directly from text.
Number of e-mail address characters	128 alphanumeric characters	E-mail addresses found via LDAP server search cannot be selected if they contain more than 128 characters.
Number of addresses you can specify at the same time	500 addresses	You can specify 100 destinations by direct entry, including LDAP search. Select the remaining 400 destinations from registered addresses.
Sendable file size	725.3 MB per file	-
Sendable number of pages	1000 pages per file	-

Folder transmission

The following table tells you the maximum values of the Scan to Folder function settings.

Values of Set Items for Scan to Folder

ltem	Maximum value	Comments
Number of path name characters on SMB	128 alphanumeric characters	-
Number of user name characters on SMB	64 alphanumeric characters	-
Number of password characters on SMB	64 alphanumeric characters	-
Number of server name characters on FTP	64 alphanumeric characters	-
Number of path name characters on FTP	128 alphanumeric characters	-
Number of user name characters on FTP	64 alphanumeric characters	-
Number of password characters on FTP	64 alphanumeric characters	-
Number of path name characters on NCP	128 alphanumeric characters	-
Number of user name characters on NCP	64 alphanumeric characters	-
Number of password characters on NCP	64 alphanumeric characters	-
Number of addresses you can specify at the same time	50 addresses	You can specify a maximum of 50 directly entered destinations.
Sendable file size	2000 MB per file	-

Simultaneous Transmission

The following table tells you the maximum values of settings for using the E-mail and Scan to Folder functions simultaneously.

Values of Set Items for Simultaneous Transmission

ltem	Maximum value	Comments
Number of destinations you can select for E-mail and Scan to Folder	550 addresses	-
Number of destinations you can select for sending by e- mail	500 addresses	You can specify a maximum of 100 directly entered destinations, including LDAP search-retrieved destinations.
Number of destinations you can set for sending by Scan to Folder	50 addresses	-

Storage Function

The following table tells you the maximum values of the storage function settings.

Values of Set Items for File Storage

ltem	Maximum value	Comments
Number of file name characters	64 alphanumeric characters	On the control panel, the first 16 characters are displayed. When viewing the stored files from a client computer using DeskTopBinder, all the entered characters can be viewed.
Number of user name characters	20 alphanumeric characters	On the control panel, the first 16 characters are displayed. When viewing the stored files from a client computer using DeskTopBinder, all the entered characters can be viewed.
Number of password characters	4-8 digit number	-
Number of stored files you can select at the same time	30 files	-

ltem	Maximum value	Comments
Storable number of files	3,000 files	This is the total number of files stored under the scanner, copier, document server, and printer functions.
Storable number of pages	9000 pages	This is the total number of files stored under the scanner, copier, document server, and printer functions.
Storable number of pages per file	1,000 pages	-
Storable size	2,000 MB per file	-

Network Delivery Function

The following table tells you the values of setting items for the network delivery scanner function.

Values of Set Items for Network Delivery

ltem	Maximum value	Comments
Number of subject line characters	128 alphanumeric characters	This is the total number of characters selected from the list and the number of characters entered directly from text.
Number of e-mail address characters	128 alphanumeric characters	-

ltem	Maximum value	Comments
Number of addresses you can specify at the same time	500 addresses	You can specify 65 destinations by direct entry, including LDAP search. Select the remaining 435 destinations from registered addresses. The maximum number of destinations you can specify differs depending on which ScanRouter delivery software you are using. For details, see the manuals supplied with the ScanRouter delivery software.
Sendable file size	2,000 MB per file	-

Scanner Features

This section explains Scanner Features settings.

To display the Scanner Features screen, press the [User Tools/Counter] key. For detailed setting method, see "Scanner Features", General Settings Guide.

Available Items in General Settings

ltems	Description
Switch Title	Sets index to use when the list of destinations of this machine is displayed.
Update Delivery Server Destination List	Allows you to update the delivery server's destination list by pressing [Update Delivery Server Destination List]. To use this function, under [System Settings], set [Delivery Option] to [On].
Search Destination	Specify the default search destination list from the machine's address book or the LDAP server. To search through an LDAP server, under [System Settings], register the LDAP server, and then set [LDAP Search] to [On].
TWAIN Standby Time	Select the machine's response if a client computer tries to use the TWAIN scanner while scanning is in progress.
Destination List Display Priority 1	Select the default destination list from the machine's destination list or from the Destination List managed by the delivery server.
Destination List Display Priority 2	Select whether to prioritize the e-mail destination list or the folder destination list.
Print & Delete Scanner Journal	Specify the machine's response of the maximum number of scanner journals is exceeded.
Print Scanner Journal	Allows you to print the scanner journal. The scanner journal is then deleted.
Delete Scanner Journal	Allows you to delete the scanner journal without printing it.

Available Items in Scan Settings

ltems	Description
A.C.S. Sensitivity Level	Allows you to set the sensitivity level for judging color/ black and white for scanning originals when [Scan Type] is set to [Auto Colour Select].
Wait Time for Next Orig.: Exposure Glass	Set which operation the machine performs while waiting for additional originals after scanning from the exposure glass.
Wait Time for Next Original(s): SADF	Sets the operation of this machine on the queue for additional originals after scanning the originals with Automatic Document Feeder (ADF).
Background Density of ADS (Full Colour)	Sets the [Auto Density] level when scanning originals in full color. [Auto Density] corrects scanning density to improve the resolution of transparent originals and on- white paper such as newspaper.

Available Items in Send Settings

ltems	Description
Compression (Black & White)	Specify a compression method for files scanned in black and white. For some originals, even if [On] is selected, compression setting is invalid and data cannot be compressed.
Compression (Gray Scale / Full Colour)	Specify a compression method for files scanned in gray scale or full color.
High Compression PDF Level	Specify the data compression method for High Compression PDF files.
Max. E-mail Size	Select whether or not to limit the size of e-mail that has attachments.
Divide & Send E-mail	Select whether or not to divide files that exceed the size specified in [Max. E-mail Size] and send them as multiple e-mails.
	If [Yes (per Max. Size)] is selected, depending on the e- mail software, the received divided file may not be restored.

ltems	Description
Insert Additional E-mail Info	Select whether or not to attach a standard message to scan files sent by e-mail. If you select [On], you must also select the language in which the message is sent.
No. of Digits for Single Page Files	Set the number of digits in serial numbers used for single- page file names.
Stored File E-mail Method	Sets the default for whether to attach a file or send URL Link when sending stored files by e-mail.

Available Items in Initial Settings

Items	Description
Menu Protect	Set the default access level for functions whose settings can be changed by users other than the administrator.

Specifications

The following table tells you the specifications of the scanner.

Specifications

Component	Specifications
Scan method	Flatbed scanning
	When using the E-mail/Scan to Folder/Network Delivery Scanner function:
	Black and white: 61 page/min
	(Original size: A4 ^{CI} , Scan Type: Text / Line Art, Resolution: 200 dpi, Compression (Black & White): On, ITU-T No1 Chart, 1-side scanning)
	When using the E-mail/Scan to Folder/Network Delivery Scanner function:
Scan speed	Full Color: 31 page/min
	(Original size: A4 ^d , Scan Type: Text / Line Art, Resolution: 200 dpi, Compression (Gray Scale / Full Colour): Compression Level 2, Original Chart, 1-side scanning)
	Scanning speed differs depending on the following; operating environment of the machine and computer, scan settings, and the content of originals (denser images require more time).
Image sensor type	CCD Image Sensor
Scan type	Sheet, book
Ethernet interface	10BASE-T/100BASE-TX or 1000BASE-T (optional)
Wireless LAN interface	IEEE 802.11a/b/g (optional)
Original sizes that can be scanned	 Length 140~297 mm (5¹/₂~11 inches) Width 140~432 mm (5¹/₂~17 inches)

Component	Specifications	
Scan sizes automatically detectable from the exposure glass	 Metric version A3², B4 JIS², A4⁴, A4², B5 JIS⁴, B5 JIS², 8¹/₂ × 13⁴ Inch version 11 × 17⁴, 8¹/₂ × 14⁴, 8¹/₂ × 11⁴, 8¹/₂ × 11 ⁴ 	
Scan sizes automatically detectable from the ADF	 Metric version A3^Δ, B4 JIS^Δ, A4^Δ, A4^Δ, A4^Δ, B5 JIS^Δ, B5 JIS^Δ, A5^Δ, A5^Δ, B6 JIS^Δ, B6 JIS^Δ, 11 × 17^Δ, 8¹/₂ × 11^Δ, 8¹/₂ × 11^Δ, 8¹/₂ × 13^Δ B6 JIS^Δ^Δ is automatically detected only when scanning one-sided originals. Inch version A3^Δ, A4^Δ, A4^Δ, A4^Δ, 11 × 17^Δ, 8¹/₂ × 14^Δ, 8¹/₂ × 11^Δ, 8¹/₂ × 11^Δ, 8¹/₂ × 11^Δ, 5¹/₂ × 8¹/₂^Δ, 5¹/₂ × 8¹/₂^Δ, 10 × 14^Δ, 7¹/₄ × 10¹/₂^Δ 	
Basic scanning resolution	600 dpi (24-bit full color)	
Selectable scanning resolutions when using the E-mail/Scan to Folder/ Network delivery scanner function	100 dpi, 200 dpi, 300 dpi, 400 dpi, 600 dpi	
Selectable scanning resolution when using TWAIN scanner	100 dpi to 1200 dpi	
Sendable file formats	TIFF, JPEG, PDF, High Compression PDF	
Image compression type for black and white (two-value)	TIFF (MH, MR, MMR)	
Image compression type for gray scale/ full color	JPEG	
Network protocol	IPv4, IPX	
Protocol for sending e-mail	SMTP	
Protocol for Scan to Folder	SMB, FTP, NCP	

7. Appendix

INDEX

Α
Access Privileges44, 73, 78, 79, 112
Address book
registering destination folders54
registering e-mail addresses21
ADF126, 130, 154
Adjusting image density128
Advanced Search
Auto Colour Select120
Auto Density128
Auto Detect121
Auto-run program159

В

B & W Text / Line Art120
B & W Text / Photo120
Basic operation
delivering scan files99
network TWAIN scanner117
sending scan files by e-mail24
sending scan files by Scan to Folder57
storing scan files77
Batch133, 136
Black & White Photo120
Black & White Text120

С

CD-ROM	159
Certificate	46
Change Access Priv	92
Change File Name	92
Change Name	149
Change Password	93
Change User Name	
Check Modes	12
Confirmation displays	12
Check Modes	
Preview	14
Scanned File Status	15
Custom Size	121
original orientation	
scanning an entire original	
scanning part of an original	

Delete	149
Delete File	90
Delivering scan files	.95, 99
Delivery	95
Delivery Dest	102
, Delivery destination	103
, Delivery server	
, DeskTopBinder Lite	
Destination (delivery)	,
searching the delivery server's destination list	104
selecting by entering the registration numbers	
selecting from the delivery server's address book	
selecting from the list	103
Destination (e-mail)	
entering manually	31
registering a directly-entered destination in the	
book	
searching an LDAP server	
searching the machine's address book	
selecting by entering the registration numbers	
selecting from the list	
selecting from the machine's address book	
Destination (folder)	40
entering the path of the NetWare server directly entering the path to a shared network folder manu	
entering the pain to a sharea network totaer manu	
entering the path to an FTP server manually	
registering the path to the selected destination in the	
book	
searching the machine's address book	
selecting by entering the registration numbers	61
selecting from the list	
selecting from the machine's address book	
specifying the path by browsing the NetWare serv	
specifying the path by browsing the shared netwo	
specifying the path by browsing the shared netwo	rк тоїаег 65
Destination list22, 28, 55, 60, 9	
Display	0, 100
confirmation displays	12
Simplified Display	
Display panel	
Divide	
Dropout Colour	120

E

E-mail destination	28
E-mail message	42
entering manually	43
selecting from the list	42
E-mail screen	.22, 27
E-mail sender	37
Edit	127
Encryption	
e-mail	45
PDF	143
Erase Border	127
Expand Group Dest	13
Exposure glass126, 12	29, 153

F

File Name sending files stored files	138
File type	138
FTP	52, 67
FTP server	52
Full Colour Glossy Photo	120
Full Colour Text / Photo	120
Functions	9

G

General Settings	165
Gray Scale	120

Н

High Compression PDF138, 139
<u>I</u>
Initial Settings167
Install
TWAIN driver
K
K Key Colour12

M

Manage / Delete File	90
Manual Entry	22, 55, 98
Mixed Original Sizes	121, 122
Mixed size originals	122, 155
Multi-page	138
Multiple pages scanned as one file	136

Ν

NCP	52, 68
NetWare server	53, 68
Network delivery function	163
Network delivery scanner screen	97, 102
Network TWAIN scanner	113
Notes about file types	139

0

One sided original	130
Original Feed Type	129
Original orientation	129
custom size	126
TWAIN scanner	153
Original Settings	130
Outline	
delivering scan files	95
network TWAIN scanner	113
sending scan files by e-mail	19
sending scan files by Scan to Folder	51
storing scan files	75

Ρ

Password	80
PDF	138
changing security permissions	144
encryption	143
security	
Permissions	144
Preparation	
network TWAIN scanner	114
sending scan files by e-mail	20
sending scan files by Scan to Folder	53
Preview	
viewing a file before sending	14
Prg. Dest	35, 72
Print List	16

Program as Defaults	151
Programs	147
changing	148, 149
defaults	151
deleting	149
recalling	148
registering	147

R

Recall148
Recept. Notice25, 100
Reg. No22, 55, 98
Registration number29, 38, 61, 104, 107
Resolution121
Resolution and scan size157
e-mail157
network delivery157
Scan to Folder157
storing157
TWAIN scanner158
Restore Factory Defaults151
Result of sending15

S

S/MIME	45
SADF	133, 136
Scan settings	119, 153, 166
Scan Size	121
Scan to e-mail	19
Scan to Folder	51
Scan to Folder destination	60
Scan to Folder screen	55, 59
Scan Type	120
Scanner Features	20, 53, 96, 165
Scanner functions	9
ScanRouter delivery software	95
Screen layout	
delivering scan files	97
list of stored files	82
sending scan files by e-mail	22
sending scan files by Scan to Folder	55
Search Dest	29, 32, 62, 104
Security	
e-mail	45
encryption (e-mail)	45
PDF	

signature	46
Security Settings	142
Select Stored File	82
Send & Store44, 73	, 112
Send Settings	166
Sender (delivery)	
searching the delivery server's destination list	
selecting by entering a registration number	
selecting from the list	107
Sender (e-mail)	37
searching the machine's address book	38
selecting by entering a registration number	
selecting from the list	
Sender Name	, 108
Sending a stored file	88
Sending scan files by e-mail1	9, 24
Sending scan files by Scan to Folder	
Sending scan files to folders	
Sending the URL by e-mail	
Serial number	
Signature	
Simplified Display	
Single Page	
SMB5	
SMTP server	
Specifications	
Stamp	
Storage function	
Store File	
Store Only	77
Stored file	
changing a file name	
changing a pasword	
changing a user name	
changing information	
checking	
checking from a client computer	
checking from the list	
deleting displaying the list	
displaying the list displaying with DeskTopBinder Lite	
displaying with Web Image Monitor	
managing	
Preview screen	
searching by file name	
searching by user name	

searching the list	83
sending	88
Storing scan files	75
specifying a file name	79
specifying a password	80
specifying a user name	79
specifying file information	79
Subject	41, 111
Switching screen	
E-mail	27
network delivery scanner	102
Scan to Folder	59
Symbol	8
System Settings20, 5	3, 96, 114

Т

Template size	121
Text	42, 43
TIFF	138
TIFF/JPEG	138
Transmission Function	160
TWAIN driver1	15, 117, 159
TWAIN scanner113, 11	17, 153, 155
Two sided original	131

U

URL	48
User Name	79

V

Values of set items	160
e-mail	160
network delivery	163
Scan to Folder	161
simultaneous transmission	161
storage	162

W

Web Image Monitor	21,	86,	87
-------------------	-----	-----	----

MEMO

MEMO

Trademarks

Adobe, Acrobat, PostScript, and Reader are either registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Pentium[®] is a registered trademark of Intel Corporation.

NetWare is a registered trademark of Novell, Inc.

Microsoft[®], Windows[®], Windows Server[®], and Windows Vista[®] are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

Other product names used herein are for identification purposes only and might be trademarks of their respective companies. We disclaim any and all rights to those marks.

The proper names of the Windows operating systems are as follows:

- * The product names of Windows 2000 are as follows: Microsoft[®] Windows[®] 2000 Professional Microsoft[®] Windows[®] 2000 Server Microsoft[®] Windows[®] 2000 Advanced Server
- * The product names of Windows XP are as follows: Microsoft[®] Windows[®] XP Home Edition Microsoft[®] Windows[®] XP Professional Microsoft[®] Windows[®] XP Media Center Edition Microsoft[®] Windows[®] XP Tablet PC Edition
- * The product names of Windows Vista are as follows: Microsoft[®] Windows Vista[®] Ultimate Microsoft[®] Windows Vista[®] Business Microsoft[®] Windows Vista[®] Home Premium Microsoft[®] Windows Vista[®] Home Basic Microsoft[®] Windows Vista[®] Enterprise
- * The product names of Windows Server 2003 are as follows: Microsoft® Windows Server® 2003 Standard Edition Microsoft® Windows Server® 2003 Enterprise Edition Microsoft® Windows Server® 2003 Web Edition Microsoft® Windows Server® 2003 Datacenter Edition
- * The product names of Windows Server 2003 R2 are as follows: Microsoft® Windows Server® 2003 R2 Standard Edition Microsoft® Windows Server® 2003 R2 Enterprise Edition Microsoft® Windows Server® 2003 R2 Datacenter Edition
- * The product names of Windows Server 2008 are as follows: Microsoft[®] Windows Server[®] 2008 Standard Microsoft[®] Windows Server[®] 2008 Enterprise Microsoft[®] Windows Server[®] 2008 Datacenter





