




Quick Reference Fax Guide

⇒ Please put this guide above your machine ⇐

- | | | | |
|--|--|---------------------------------|--|
| 1. Receive File indicator | 10. [Escape] key
Press to cancel operation or return to the previous display. | 15. [Clear/Stop] key | 25. Quick Dial keys |
| 2. Communicating indicator | 11. Scroll keys | 16. Main power indicator | 26. Quick Dial Flip Plate |
| 3. [On Hook Dial] key | 12. [OK] key
Press to set a selected item or an entered numeric value. | 17. Operation switch | 27. [Check Destination] key |
| 4. [Facsimile] key
Press to switch to the facsimile mode. | 13. [User Tools/Counter] key | 18. [Start] key | 28. [Job Information] key |
| 5. [Pause/Redial] key | 14. [Clear Modes] key
Press to clear the current settings. | 19. [#] key (Enter key) | 29. [Search Destination] key |
| 6. Function keys | | 20. Number keys | 30. [Memory Trans.] key |
| 7. Indicators | | 21. [Lighter] key, [Darker] key | 31. [Resolution] key |
| 8. Display panel | | 22. Alert indicator | 32. User Function keys
You can program frequently used functions in these keys under Set User Function Key. |
| 9. Selection keys | | 23. Data In indicator | |
| | | 24. [Original] key | |

4 This button needs to be selected as first step

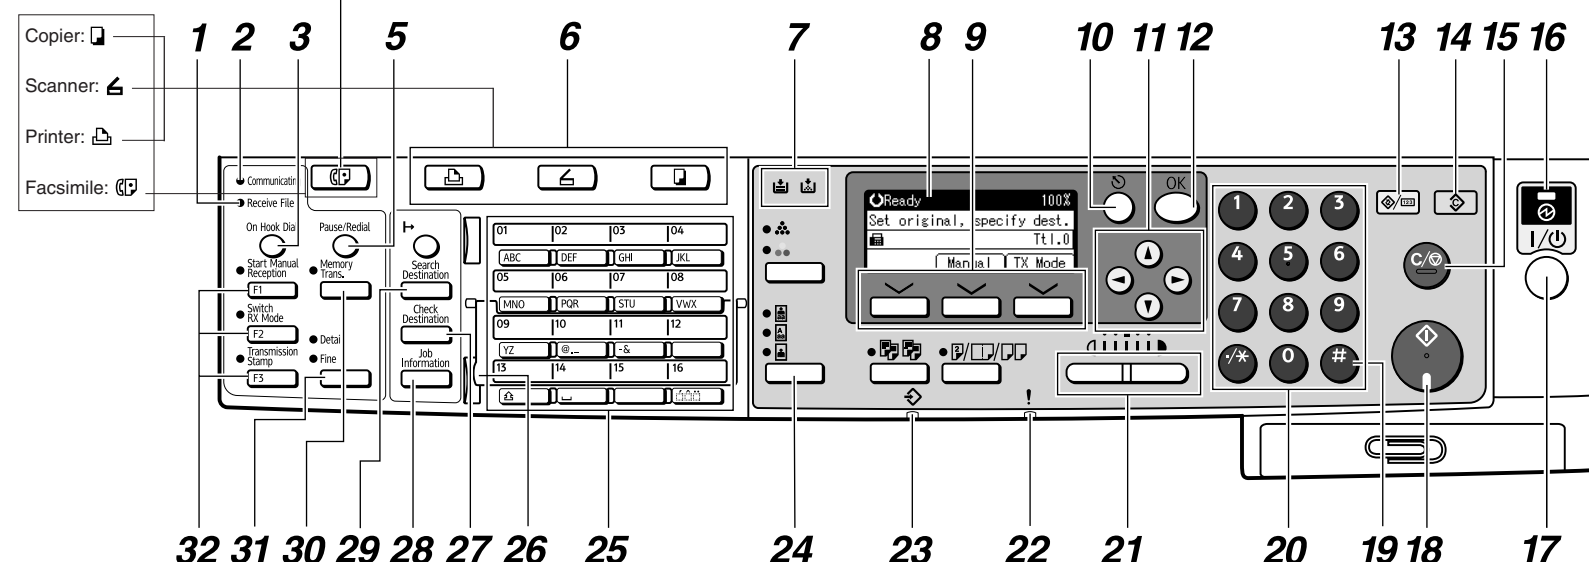

To select an item on the display...

- Use [▲] or [▼] to scroll the display.
- Press the [OK] key to set the currently selected item and to proceed to the next display.


How to send a fax... (1. Transmission)

- 1 Specify a transmission mode by pressing the [Memory Trans.] key:


- Memory Transmission, or
- Immediate Transmission

- 2 Place the original.

- Exposure glass (face down)



- ADF (face up)



- 3 Make the scan settings you require.

- 4 Specify a destination.

- 5 Press the [Start] key.

If you choose Memory Transmission, you can send to more destinations at once. To do this, after step 4, press:

- [Add Dest] and specify destinations
- the [Start] key

How to fax via a network (5. Fax via Computer)

LAN-Fax

Using the LAN-Fax Driver, you can send a document created with a Windows application from a computer connected to the machine to another fax machine. To use LAN-Fax, install the LAN-Fax Driver on your computer.

How to register a Quick Dial... (1. Transmission)

- 1 Press the [User Tools/Counter] key.
- 2 Select [System Settings], and then press the [OK] key.
- 3 Select [Administrator Tools], and then press the [OK] key.
- 4 Select [Address Book Management], and then press the [OK] key.
- 5 Select [Program/Change], and then press the [OK] key.
- 6 Enter the registration number you want to program, and then press the [OK] key.
- 7 Enter the name, and then press the [OK] key.
- 8 Press [Details].
- 9 Select [Fax Settings], and then press the [OK] key.
- 10 Enter the fax number and specify optional settings.
- 11 Press [End].
- 12 Press the [OK] key.
- 13 Press the [User Tools/Counter] key.
- 14 You will get a message 'Settings have been updated...'. Press [Exit].

How to send at a specific time (Send Later) (2. Other Transmission Features)

Using this function, you can instruct the machine to send the fax at a later time via Memory Transmission. Advantage: you can take advantage of off-peak telephone charges, without being at the machine.

- 1 Place the original, and then select the scan settings you require.
- 2 Press [TX Mode].
- 3 Select [Send Later], and then press the [OK] key.
- 4 Select [Send at Specified Time], and then press the [OK] key.
- 5 Enter the time (24 hour format) using the number keys, and then press the [OK] key.
- 6 Press the [Escape] key.
- 7 Specify a destination, and then press the [Start] key.

How to cancel a transmission... (1. Transmission)

Memory + Immediate

Before the original is scanned = before pressing the [Start] key:

- 1 Press the [Clear Modes] key.

While the original is being scanned = after pressing the [Start] key:

- 1 Press the [Clear/Stop] key.

Memory

While the original is being transmitted:

- 1 Press the [Clear/Stop] key.
- 2 Select the file you want to cancel, and then press [Stop TX].
- 3 Press [Delete].
- 4 Press the [Escape] key.


Before the transmission is started:

- 1 Press the [Job Information] key.
- 2 Select [Check/Stop TX File], and then press the [OK] key.
- 3 Select the file you want to cancel, and then press [Stop TX].
- 4 Press [Delete].
- 5 Press the [Escape] key twice.

How to print the Journal... (4. Confirming Communication Information)

The Journal is printed automatically after every 50 communications. You can also request a Journal at any time, by following the procedure below.

- 1 Press the [Job Information] key.
- 2 Select [Print Journal], and then press the [OK] key.
- 3 Press the [Start] key.
- 4 Press the [Escape] key.



Advanced Fax Features

Please see the <Facsimile Reference> Operating Instructions:

- SUB/SEP Codes (2. Other Transmission Features)
Privacy can be protected when faxing with a SUB/SEP Code, since only people who know the SUB/SEP Code can receive or print the fax document.
- Printed reports (4. Confirming Communication Information)
Inform you if a fax has been saved, sent, or failed to be transmitted.
- LAN-Fax features - Sending a fax from a computer (5. Fax via Computer)