# **Quick Reference Copy Guide**

# ⇒Please put this guide above your machine

\*The shape of the machine, screen displays procedures, and titles in references vary depending on the machine you are using. Also, not all functions are available on all machines.

#### Tips Paper Size 9 ? **B**5 Paper Size Aa You can check the paper size using the scale on the exposure glass. Auto Image Density

Dark texture originals will be copied so that background will not be reproduced.


**Auto Paper Select** 

Selects a suitable size of paper automatically.

# How to make Copies... (Placing Originals, Paper Specification and Adding Paper, Basic Copvin

- 1 Press the [Home] key on the top left of the control panel. Flick the screen to the left, and then press the [Copier] icon on the Home screen 4.
- 2 Press [Reset].
- B Place the originals. Exposure Glass

(Face down)



 Auto Document Feeder (Face up)





- Make desired settings.
- **5** Enter the number of copies.
- Ø Press [Start].

## How to select a color mode... (Color Copying) Select a color mode. Auto Color Select Full Color Black & White How to Reduce/Enlarge... (Basic Copying) Auto Reduce/Enlarge Press [Auto Reduce / Enlarge]. 2 Select the paper size. Delace the originals, and then press [Start]. **Preset Reduce/Enlarge** Press [Reduce / Enlarge]. Reduce / Enlarge 2 Select a ratio, and then press [OK]. **B** Place the originals, and then press [Start]. (Paper size is selected automatically.)

# 1. [Home] key

- Press to display the [Home] screen.
- 2. Display panel
- 3. [Reset] Press to clear the current settings.
- 4. Energy Saver
- 5. Main power indicator
- 6. Media access lamp 7. Media slots
- 8. [Stop] key
- Press to stop a job in progress, such as
- copying, scanning, faxing, or printing.
- 9. [#] (Enter key) 10. [Sample Copy]
- 11. [Start] Press to start copying, printing, scanning, or sending. 12. [C] (Clear key) Press to delete a number entered. 13. Number keys 14. [Simplfied Scrn.]
- 15. [Interrupt mode] 16. [Recall/Program/Change Program] Press to register frequently used settings, or to recall registered settings. 17. [Check Status] key 18. [Menu] key 19. [Return] key

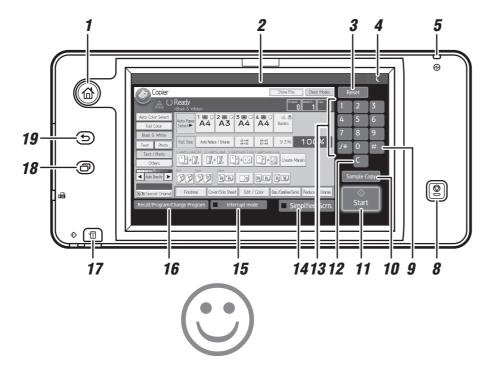



### How to save paper...

Duplex

Combine

1-sided Combine

of copy paper.

Copies multiple 1-sided or

Document Server.

1-Sided  $\rightarrow$  2-Sided

on one 2-sided page

Copies two 1-sided pages

⇒

2 Press [Dup./Combine/Series].

See if original is 1-sided or 2-sided (duplex)

Place the originals, and then press [Start].

2-sided originals on one side originals on two sides of

**B** Select the original and copy types and/or the orientation.

2-Sided  $\rightarrow$  2-Sided

⇒

one 2-sided page

2-sided Combine

For more functions on Combine, see "Basic Copying", Copy/

copy paper

Copies multiple 1-sided

Copies one 2-sided page on

2

(Basic Copying)

Copies multiple 2-sided

originals on two sides of

copy paper

Dup./Combine/Series


How to finish your document...

# Staple

- **1** Press [Finishing]. **2** Press [Finisher] when the key is
- displayed.
- **E** Select one of the stapling positions (Copies will be sorted automatically).
- Press [OK].
- **5** Enter the number of copies.
- **6** Place the originals, and then press [Start].

# Punch

- Press [Finishing].
- 2 Press [Finisher] when the key is displayed.
- B Select one of the punch hole positions (Copies will be hole punched).
- Press [OK].
- **1** Enter the number of copies.
- I Place the originals, and then press [Start].
- Staple and Punch can be done at the same time.
- Availability of finishing depends on your configuration.





#### **Document Server**

#### Why use it...

- To store often used documents centrally and print on demand.
- To reduce network load.

## How to use in copy mode...

- Press [Store File].
- 2 Enter a user name, file name, or password User Name File Name Password if necessarv.
- **B** Specify a folder in which to store the document if necessary.
- Press [OK].
- D Place the originals.
- Make the scanning settings for the original.
- Press [Start].

The machine stores scanned originals in memory and makes one set of copies.

To find your document, press the [Home] key on the top left of the control panel, and press the [Document Server] icon on the screen.

Image: Section 10.0117         Description         Descrip         Description <thdescrip< th=""></thdescrip<>	Image         Non-News         Lange         Non-News         Lange         Non-News         No-News         No-News         No-New	2	≪File List> Han is known		ت قات	
2000-01         440.545         270022         32.42         5           440.547         27009         32.42         5         5           440.547         27009         32.42         5         5           440.547         27009         32.42         5         5           440.547         27009         32.42         5         5           440.547         27009         32.41         5         5	Julius         Latius         Latius <thlatius< th=""> <thlatius< th=""> <thlatius< th="" th<=""><th></th><th colspan="2">hused der</th><th>3 U.Ceunil</th><th></th></thlatius<></thlatius<></thlatius<>		hused der		3 U.Ceunil	
Opparat         Jakasi Control (a) (a) (b)           Jakasi Control (a) (b) (b)         Opparat           Jakasi Control (a) (b)         Opparat           Jakasi Contro (a) (b)         Opparat      <	Julys         Links         Links <td< th=""><th>=</th><th>Ist Relier</th><th>Dis Not</th><th>Sec. Sec.</th><th></th></td<>	=	Ist Relier	Dis Not	Sec. Sec.	
Un Wei Addard CPR05 Direct 5 Con-	All (M 2         CPR012         M (L 1         CPR012	Dog &I	alliard.	07/005	X 4.   1	Take.
alar Dani a a s	241341         1274002         26.4.1.5         Ferroris           96 Wrs         241341         1274001         26.4.1.5         Ferroris		JALM 1	228004	1X (6.1.5	Crysfield
	Network Adds 1 C2000 DE-611.5	00.27	asta é	0.27003	18 at 1 5	
Helina Jalari Chill Braci 5		_	ani.se 2	22402	3 a. 5	
A	aritt (264)	Belkis	38L91	0.24000	Dist. 1.5	
	onn(two)					A 2

(Basic Copying)

Store File

For more functions on Document

Server, see "Document Server", Copy/ Document Server.

# Simple Screen

When you press [Simplfied Scrn.], the screen changes to the simple screen. Letters and keys are displayed at a larger size, making operations easier.

Only the main functions can be used.

#### Advanced features

#### **Reduce/Enlarge**

- Zoom: You can specify the reproduction ratio in increments of 1%.
- Magnification: You can specify the horizontal and vertical reproduction ratios. individually.

#### **Series Copies**

 Separately copies the front and back of a 2-sided original onto two sheets.

#### Booklet/Magazine

 Copies two or more originals in page order.

#### Edit/Stamp

• Image Repeat/Double Copies: The original image is copied repeatedly.

(Basic Copying, Advanced Copying)

- Centering: Moves image to the center.
- Erase: Erases the center and/or all four sides of the original image.
- Stamps: Copies with the date, page numbers, etc.
- **Cover/Slip Sheet**
- Covers: Create cover sheets.
- Designate: Copies certain pages of the original onto designation sheets.