
## Quick Reference Scanner Guide


# ⇒Please put this guide above your machine <>

To use the scanner functions, several settings must be made beforehand. For details about these settings, see Scanner Reference chapter 9 on the supplied CD-ROM.



Available scan functions:

- 1 Scan to E-mail
- 2 Scan to Folder (SMB/FTP/NCP)
- Scan Using WSD (Web Services on Devices)
- Store to Hard Disk
- **5** Save to Removable Memory Device
- 6 Scan to Delivery Server
- Scan via TWAIN Driver
- For details about **B**, **5**, **6**, and **2**, see Scanner Reference on the supplied CD-ROM.

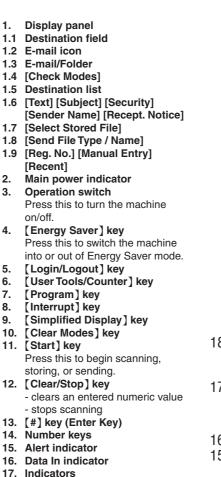


You can also fax on this machine! Please ask your service representative for this option.

**5** Select destination(s).

18. Function keys

these keys.

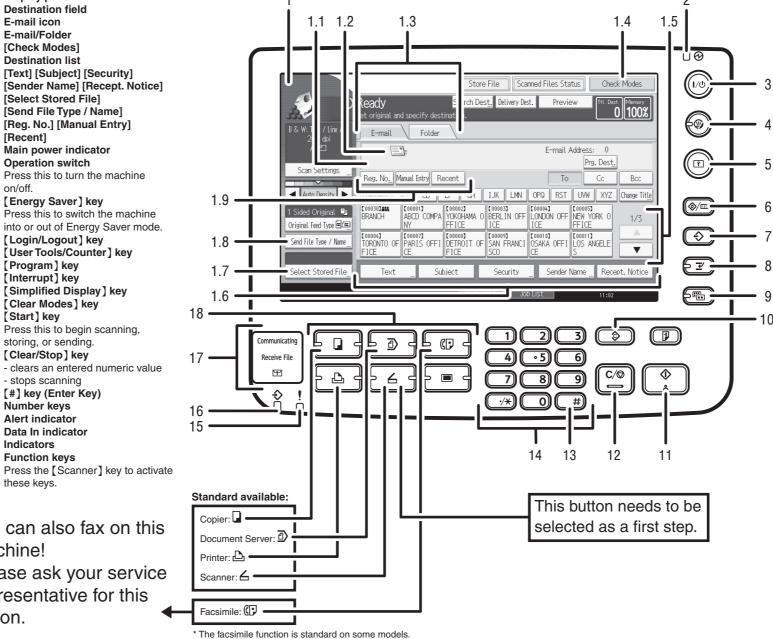

• To specify the e-mail sender, press [Sender Name].

· Select a sender.



(4. Storing Files Using the Scanner Function)

- 1 Press the [Scanner] key.
- 2 Press the [Clear Modes] key.
- Make settings for storing scanned data files:
- Press [Store File] and [Store to HDD].
- Specify the file information: user name, file name, and password. Press [OK].
- 5 Place the originals and configure the necessary settings via [Original Feed Type].
- **6** Configure the basic settings (original type, resolution, etc.) via [Scan Settings].
- Press the [Start] kev.

For details about saving to removable memory devices, see 5. Saving Scan Files on a Removable Memory Device, Scanner Reference on the supplied CD-ROM.

To store scanned files in the hard disk of the machine for later (shared) use. (See Scanner Reference.)

## Displaying a list of files stored on the machine's hard disk

(4. Storing Files Using the Scanner Function)

- 1 Press the [Scanner] key.
- Press [Select Stored File]. The list of stored files is displayed.



### (Network and System Settings Reference Registering an 5. Registering Addresses and Users E-mail destination... for Facsimile/Scanner Functions

- 1 Press the [User Tools/Counter] key.
- 2 Press [System Settings].
- Press [Administrator Tools].
- Press [Address Book Management].
- 5 Check that [Program / Change] is selected.
- G Press [New Program].
- Configure the user details.
- Press [E-mail].
- Press [Change], which is on the right side of the e-mail
- Enter the e-mail address, and then press [OK].
- Press [OK].

For details about registering folders, see 5. Registering Addresses and Users for Facsimile/Scanner Functions, Network and System Settings Reference.



- Press the [Scanner] key.
- Press the [Clear Modes] key.
- If the network delivery scanner screen appears, switch to the E-mail screen or Scan to Folder screen.
- Place the originals and configure the necessary settings such as original size and orientation.
- For scan to e-mail: Before selecting the destination, be sure to select [To]. When necessary, select [Cc] or [Bcc] and destination(s). If necessary, press [Send File Type / Name] to specify settings such as file name and file format. For scan to e-mail only Specify the e-mail sender. Depending on the security settings, the logged-in user may appear in the [Sender Name] field.

In total, up to 500 destinations can be specified.

