

Reissued: 20-Mar-15

Model: Rigel-PJ1 cwH	Date: 17-May-12	No.: RY018001c
----------------------	-----------------	----------------

RTB Reissue

The items in bold italics have been corrected.

Subject: Firmware Release Note: Main		Prepared by: S. Ishizu	
From: VC Products Support Sect, Solution Support Dept.			
Classification:	☐ Troubleshooting ☐ Mechanical ☐ Paper path ☐ Product Safety	☐ Part information ☐ Electrical ☐ Transmit/receive ☒ Other (Firmware)	☐ Action required ☐ Service manual revision ☐ Retrofit information ☒ Tier 2

This RTB has been issued to announce the firmware release information for the **Main**.

Version	Program No.	Effective Date	Availability of RFU
<i>C08T</i>	<i>Y0185510C</i>	<i>March 2015 production</i>	<i>Not available</i>
C07	Y0185510B	August 2014 production	Not available
C06	Y0185510A	December 2012 production	Not available
C04	Y0185510	May 2012 production	Not available

Note: Definition of Availability of RFU via @Remote
"Available": The firmware can be updated via RFU or SD card.

"Not available": The firmware can only be updated via SD card.

Version	Modified Points or Symptom Corrected
<i>C08T</i>	<i>1) Additional model information:</i> <i>None.</i> <i>2) Specification changes:</i> <i>None.</i> <i>3) Error corrections:</i> <i>Fan control has been changed to slightly cool down the lamp temperature when turned off.</i>
C07	1. The following change was made for ErP Lot 6 compliance: The default value of "Power Off on No Signal" was changed from "OFF" to "20 min." Location: [Menu] -> [Default Setting 1] -> [Power Off on No Signal] 2. The Arabic display language was added to the OSD menu.
C06	Other: Color reproduction was improved.

Reissued: 20-Mar-15

Model: Rigel-PJ1 cwH	Date: 17-May-12	No.: RY018001c
----------------------	-----------------	----------------

Version	Modified Points or Symptom Corrected
C04	Initial release

Reissued: 19-Aug-14

Model: Rigel-PJ1 cwL	Date: 17-May-12	No.: RY018002a
----------------------	-----------------	----------------

RTB Reissue

The items in bold italics have been corrected.

Subject: Firmware Release Note: Main		Prepared by: S. Ishizu	
From: 2nd Tech Service Sect., MFP/Printer Tech Service Dept.			
Classification:	☐ Troubleshooting	☐ Part information	☐ Action required
	☐ Mechanical	☐ Electrical	☐ Service manual revision
	☐ Paper path	☐ Transmit/receive	☐ Retrofit information
	☐ Product Safety	☒ Other (Firmware)	☒ Tier 2

This RTB has been issued to announce the firmware release information for the **Main**.

Version	Program No.	Effective Date	Availability of RFU
<i>C05</i>	<i>Y0195510A</i>	<i>August 2014 production</i>	<i>Not available</i>
C04	Y0195510	May 2012 production	Not available

Note: Definition of Availability of RFU via @Remote
"Available": The firmware can be updated via RFU or SD card.
"Not available": The firmware can only be updated via SD card.

Version	Modified Points or Symptom Corrected
<i>C05</i>	1. The following change was made for ErP Lot 6 compliance: The default value of "Power Off on No Signal" was changed from "OFF" to "20 min." Location: [Menu] -> [Default Setting 1] -> [Power Off on No Signal] 2. The Arabic display language was added to the OSD menu.
C04	Initial release

Model: Rigel-PJ1 cxL	Date: 17-May-12	No.: RY018003
-----------------------------	-----------------	---------------

Subject: Firmware Release Note: Main		Prepared by: S. Ishizu	
From: 2nd Tech Service Sect., MFP/Printer Tech Service Dept.			
Classification:	☐ Troubleshooting	☐ Part information	☐ Action required
	☐ Mechanical	☐ Electrical	☐ Service manual revision
	☐ Paper path	☐ Transmit/receive	☐ Retrofit information
	☐ Product Safety	☒ Other (Firmware)	☒ Tier 2

This RTB has been issued to announce the firmware release information for the **Main**.

Version	Program No.	Effective Date	Availability of RFU
C04	Y0235510	May 2012 production	Not available

Note: Definition of Availability of RFU via @Remote

“Available”: The firmware can be updated via RFU or SD card.

“Not available”: The firmware can only be updated via SD card.

Version	Modified Points or Symptom Corrected
C04	Initial release

Reissued: 15-Jun-15

Model: Antares-PJ1/Rigel-PJ1/Polaris-PJ1/ Mizar-PJ1/Mimosa-PJ1	Date: 17-May-12	No.: RY020002d
---	-----------------	----------------

RTB Reissue

The items in ***bold italics*** have been corrected or added.

Subject: Firmware Release Note: FW Update		Prepared by: S. Ishizu	
From: VC Products Support Sect, Solution Support Dept.			
Classification:	☐ Troubleshooting ☐ Mechanical ☐ Paper path ☐ Product Safety	☐ Part information ☐ Electrical ☐ Transmit/receive ☒ Other (Firmware)	☐ Action required ☐ Service manual revision ☐ Retrofit information ☒ Tier 2

This RTB has been issued to announce the firmware release information for the **FW Update**.

Version	Program No.	Effective Date	Availability of RFU
12.6	Y0185511B	August 2014 production	Not available
10.3	Y0185511A	November 2012 production	Not available
9.2	Y0185511	May 2012 production	Not available

Note: Definition of Availability of RFU via @Remote
“Available”: The firmware can be updated via RFU or SD card.

“Not available”: The firmware can only be updated via SD card.

Version	Modified Points or Symptom Corrected
12.6	Firmware modified to support the DDP 442X. Additional Supported Model: Polaris-PJ1/ Mizar-PJ1/ <i>Mimosa-PJ1</i>
10.3	NOTE: 1. There is no functional difference between this version (v10.3) and the previous version, v9.2. This version was released in accordance with the modification made to the DLP Composer (which is not released). 2. The FlashDeviceParameters.txt text file is provided as an attachment to this firmware release.
9.2	Initial release

Reissued:31-Jan-13

Model: Rigel-PJ1 cxL	Date: 18-Jan-13	No.: RY018004a
----------------------	-----------------	----------------

RTB Reissue

The items in ***bold italics*** were corrected or added.

Subject: <i>Add new model (Rigel-T-PJ1cxL) for China</i>		Prepared by: Shingo Ishizu	
From: 2nd Tech Service Sect., MFP/P Tech Service Dept.			
Classification:	☐ Troubleshooting ☐ Mechanical ☐ Paper path ☐ Product Safety	☒ Part information ☐ Electrical ☐ Transmit/receive ☐ Other ()	☐ Action required ☐ Service manual revision ☐ Retrofit information ☐ Tier 2

Old part number	New part number	Description	Q'ty	Int	Page	Index	Note
-	<i>Y0301085</i>	Cover: Rear: K130(Y030)	1	-	3	3	
-	<i>Y0301123</i>	Cover: Upper: K130	1	-	3	1	
-	<i>Y0301140</i>	Cover: Lamp: K130	1	-	3	19	
-	<i>Y0301204</i>	Ring:Zoom: K130	1	-	3	7	
-	<i>Y0301133</i>	Keytop(Y030)	1	-	3	5	
-	<i>Y0306082</i>	Remote Control(Y030)	1	-	3	16	
-	<i>Y0301150</i>	Filter: left: CHN(Y030)	1	-	3	17	
-	<i>Y0301155</i>	Filter: right: CHN(Y030)	1	-	3	18	
-	<i>Y0301061</i>	Cover: Lower (Y030)	1	-	5	15	

Change: The above parts were newly registered.

Reason: New models for China have been released.


Model: Rigel-PJ1c Series		Date: 21-Mar-13	No.: RY018005
Subject: Rigel-PJ1c Parts Catalog Correction		Prepared by: Shingo Ishizu	
From: 2nd Tech Service Sect., MFP/P Tech Service Dept.			
Classification:	☐ Troubleshooting	☒ Part information	☐ Action required
	☐ Mechanical	☐ Electrical	☐ Service manual revision
	☐ Paper path	☐ Transmit/receive	☐ Retrofit information
	☐ Product Safety	☐ Other ()	☐ Tier 2

Change/Reason: The words highlighted in **bold** were added due to new models.

PJ WX5150/PJ WX5140/PJ X5140/ **K130/PJ X5145** **(Y018/Y019/Y023-21/Y030/Y023-50)**

PARTS CATALOG

1.Projector 1 (Y018/Y019/Y023-21/Y030/Y023-50)

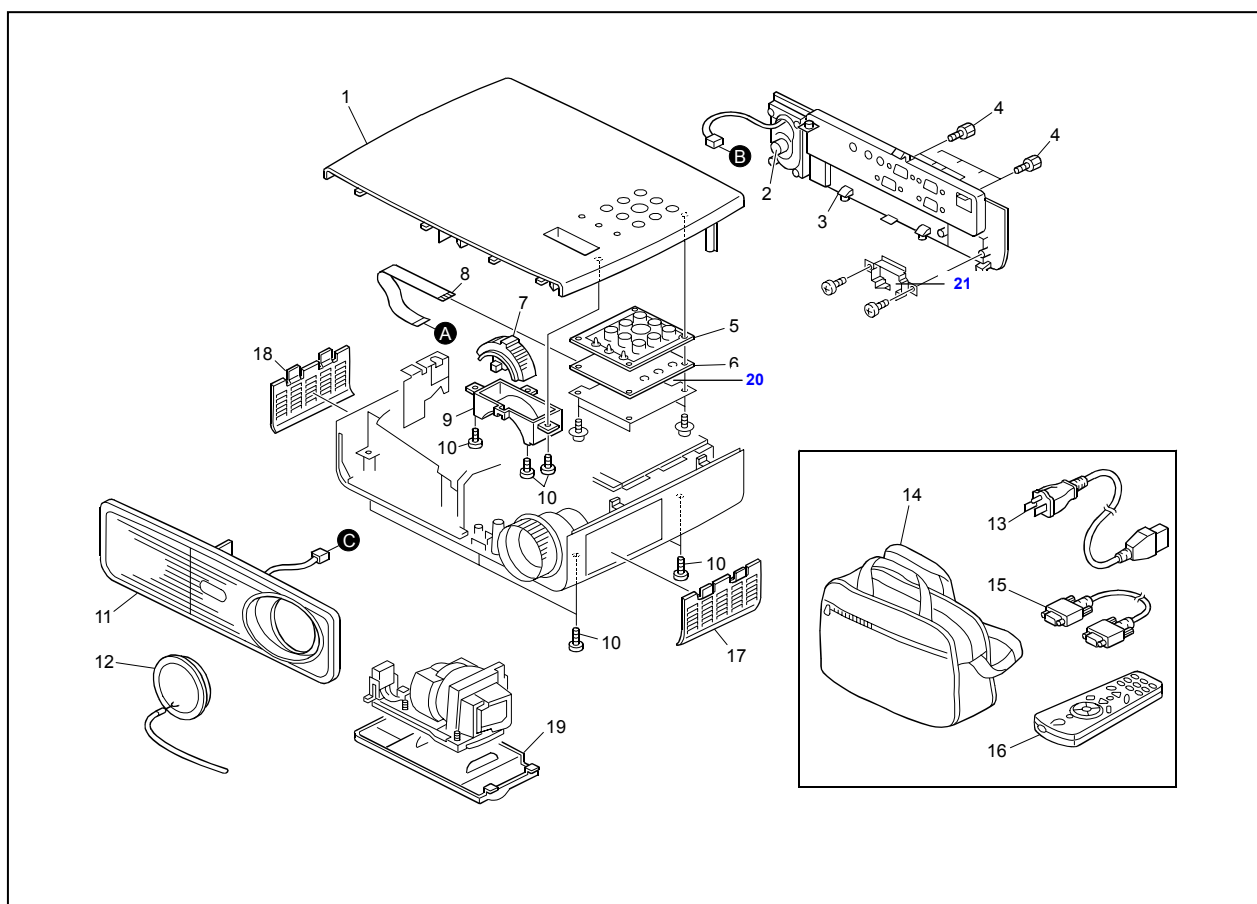

Model: Rigel-PJ1c Series


Date: 21-Mar-13

No.: RY018005


1.Projector 1 (Y018/Y019/Y023-21/Y030/Y023-50)

Index No.	Part No.	Description	Q'ty Per Assembly
1	Y018 1123	Cover:Upper:EXP	1
1	Y030 1123	Cover:Upper:K130:(Y030)	1
2	Y018 1096	Speaker	1
3	Y018 1083	Cover:Rear:(Y018)	1
3	Y019 1084	Cover:Rear:(Y019)	1
3	Y023 1085	Cover:Rear:(Y023-21)	1
3	Y030 1085	Cover:Rear:(Y030)	1
3	Y023 1161	Cover:Rear:(Y023-50)	1
4	Y018 2704	Hexagon Head Bolt	8
5	Y018 1133	Keytop:EXP	1
5	Y030 1133	keytop:K130:(Y030)	1
6	Y018 1134	PCB:Keytop	1
7	Y018 1204	Ring:Zoom:(Y018/Y019)	1
7	Y023 1204	Ring:Zoom:(Y023)	1
7	Y030 1204	Ring:Zoom:K130(Y030)	1
8	Y018 1136	Wire:Keytop	1
9	Y018 1206	Holder:Ring:Zoom:(Y018/Y019)	1
9	Y023 1206	Holder:Ring:Zoom:(Y023)	1
10	Y018 2702	Pan Head Screw:M3x5	9
11	Y018 1110	Cover:Front	1
12	Y018 1064	Cap:Lens	1
13	Y020 6076	Power Supply Cord:NA	1
13	Y020 6077	Power Supply Cord:EU	1
13	Y020 6078	Power Supply Cord:CHN	1
14	Y018 6090	Soft Case	1
15	Y020 6079	Cable:RGB	1
16	Y018 6082	Rimote Control:EXP	1
16	Y030 6082	Rimote Control:(Y030)	1
17	Y018 1150	Filter:Left:Ass'y:CHN	1
17	Y030 1150	Filter:Left:Ass'y:CHN:(Y030)	1
18	Y018 1155	Filter:Right:Ass'y:CHN	1
18	Y030 1155	Filter:Right:Ass'y:CHN:(Y030)	1
19	Y018 1140	Cover:Lamp:Ass'y:(Y018)	1
19	Y019 1140	Cover:Lamp:5140:(Y019/Y023)	1
19	Y030 1140	Cover:Lamp:K130:(Y030)	1
20	Y018 1135	Shield Plate Key Board	1
21	Y018 5051	Bracket Power Cord	1

2.Projector 2 (Y018/Y019/Y023-21/Y030/Y023-50)

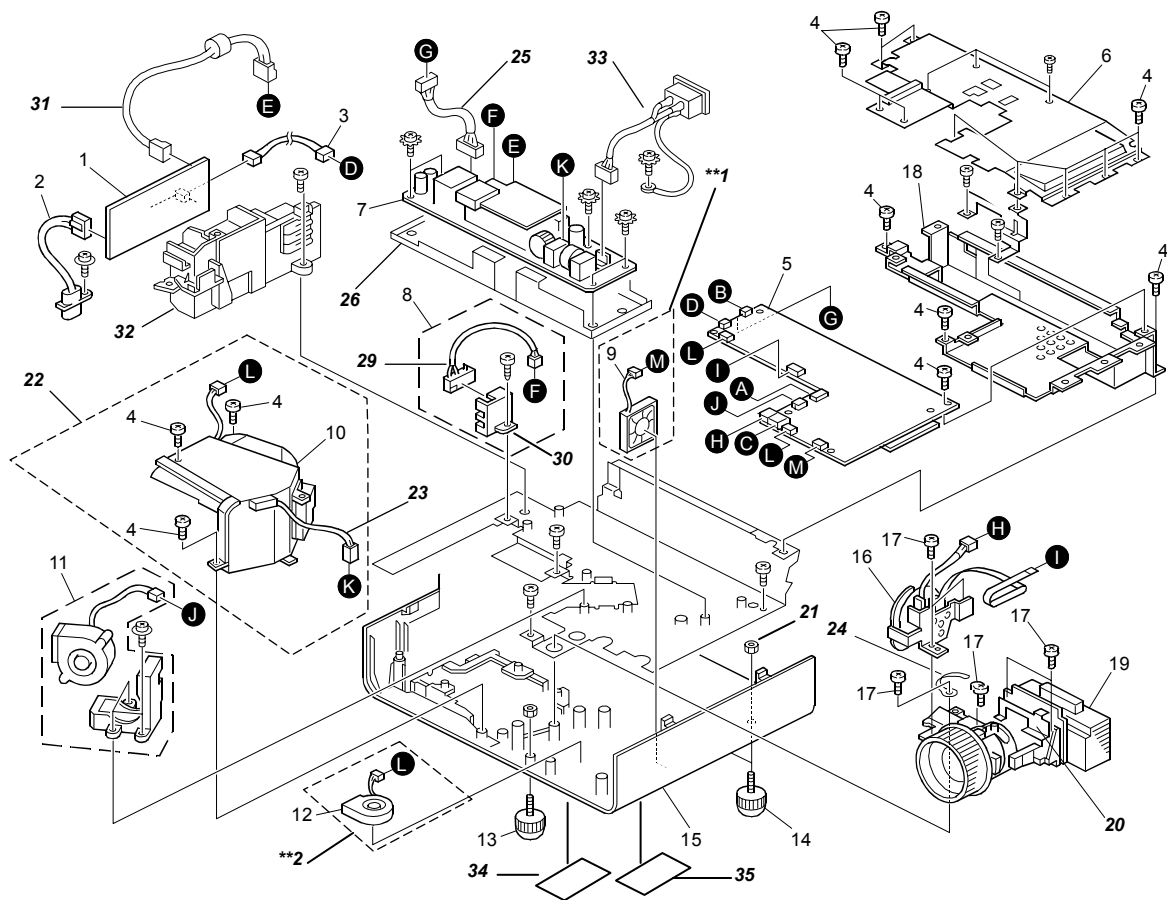


****1**

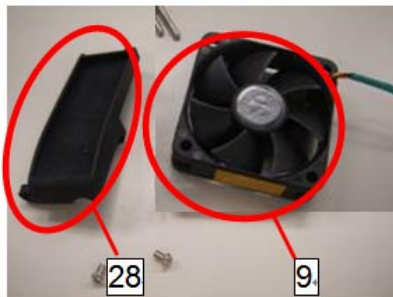

Index No.	Part No.	Description	Q'ty Per Assembly
9 28	Y0182071 Y018 2073	Fan:Axial:Optical Unit:(Y018) Cushion(Y018)	1 1

****2**

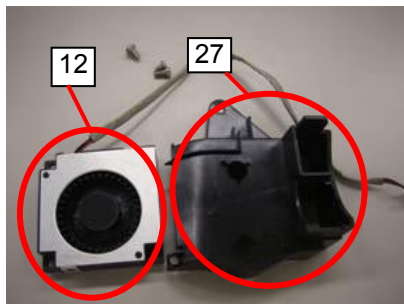

Index No.	Part No.	Description	Q'ty Per Assembly
12 27	Y018 2060 Y018 2062	Fan:Cooling:(Y018) Duct(Y018)	1 1

Model: Rigel-PJ1c Series

Date: 21-Mar-13

No.: RY018005

2.Projector 2 (Y018/Y019/Y023-21/Y030/Y023-50)

Index No.	Part No.	Description	Q'ty Per Assembly
1	Y018 5057	Power Pack:(Y018)	1
1	Y019 5057	Power Pack:(Y019/Y023)	1
2	Y018 5065	Wire:Mercury Lamp	1
3	Y018 5067	Wire:Control:Driver	1
4	Y018 2702	Pan Head Screw:M3x5	13
5	Y018 5083	PCB:Control:(Y018)	1
5	Y019 5083	PCB:Control:(Y019)	1
5	Y023 5083	PCB:Control:(Y023)	1
6	Y018 5096	Ground Plate:Base:Upper	7
7	Y018 5052	Power Supply Unit:(Y018)	1
7	Y019 5052	Power Supply Unit:(Y019/Y023)	1
8	Y018 5074	Safety Switch	1
9	Y018 2071	Fan:Axial:Optical Unit:(Y018)	1
10	Y018 2079	Case:Lamp	1
11	Y018 2055	Blower:Lamp	1
12	Y018 2060	Fan:Cooling:(Y018)	1
13	Y018 1211	Rubber Foot:Front	1
14	Y018 1210	Rubber Foot:Rear	2
15	Y018 1061	Cover:Lower:(Y018)	1
15	Y019 1061	Cover:Lower:(Y019/Y023)	1
15	Y030 1061	Cover:Lower:(Y030)	1
16	Y018 3052	Optical Unit:Color:Wheel	1
17	Y018 2711	Pan Head Screw:M2.6x6	5
18	Y018 5094	Ground Plate:Base:Lower	1
19	Y018 3051	Optical Unit:(Y018)	1
19	Y019 3051	Optical Unit:(Y019)	1
19	Y023 3051	Optical Unit:(Y023)	1
20	Y018 5095	Shield Plate: Optical Engine	1
21	Y018 1065	Nut: Rubberfoot	3
22	Y018 2080	Case: Lamp(Y018)	1
22	Y019 2080	Case: Lamp(Y019/Y023)	1
23	Y018 2093	Thermofuse(Y018)	1
23	Y019 2093	Thermofuse(Y019/Y023)	1
24	Y018 3055	Clamp	1
25	Y018 5053	Wire:Power Source	1
26	Y018 5056	Insulating Sheet: Base(Y018)	1
26	Y019 5056	Insulating Sheet: Base(Y019/Y023)	1
27	Y018 2062	Duct(Y018)	1
28	Y018 2073	Cushion(Y018)	1
29	Y018 5075	Safety Switch	1
30	Y018 5076	Case: Safety switch	1
31	Y018 5066	Wire: Power pack	1
32	Y018 5064	Holder: Power pack	1
33	Y018 5050	Wire: Power	1
34	Y018 8502	Decal: Warning: CHN/NA	1
34	Y018 8504	Decal: Warning: EU	1
34	Y030 8502	Decal: Warning: CHN(Y030)	1


Model: Rigel-PJ1c Series	Date: 21-Mar-13	No.: RY018005
--------------------------	-----------------	---------------

Index No.	Part No.	Description	Q'ty Per Assembly
35	Y018 8503	Decal: Caution: CHN/NA	1
35	Y018 8505	Decal: Caution: EU	1
35	Y030 8503	Decal: Caution: CHN(Y030)	1


Model: Rigel-PJ1c Series		Date: 8-Sep-14	No.: RY018006
Subject: Rigel-PJ1c Parts Catalog Correction		Prepared by: Shingo Ishizu	
From: VC Products Support Sec., Solution Support Dept.			
Classification:	☐ Troubleshooting	☒ Part information	☐ Action required
	☐ Mechanical	☐ Electrical	☐ Service manual revision
	☐ Paper path	☐ Transmit/receive	☐ Retrofit information
	☐ Product Safety	☐ Other ()	☐ Tier 2

Change/Reason: The highlighted in **bold** were added due to new model.

2.Projector 2 (Y018/Y019/Y023-21/Y030/Y023-50)

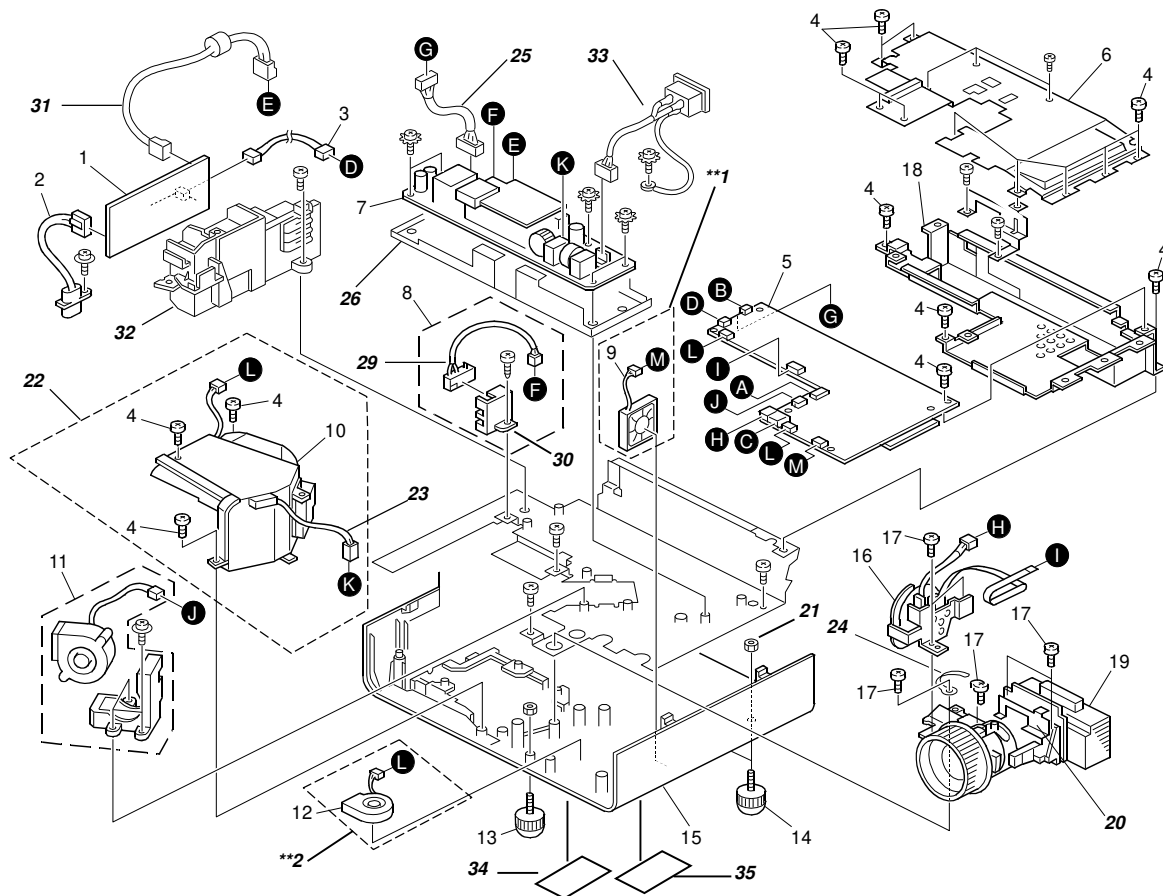

****1**

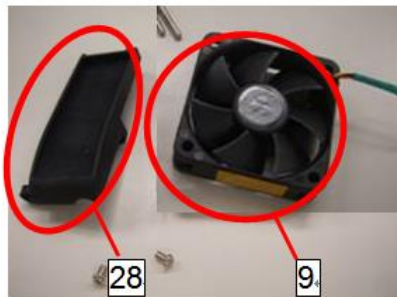


Index No.	Part No.	Description	Q'ty Per Assembly
9	Y0182071	Fan:Axial:Optical Unit:(Y018)	1
28	Y018 2073	Cushion(Y018)	1

Model: Rigel-PJ1c Series

Date: 8-Sep-14

No.: RY018006

**2

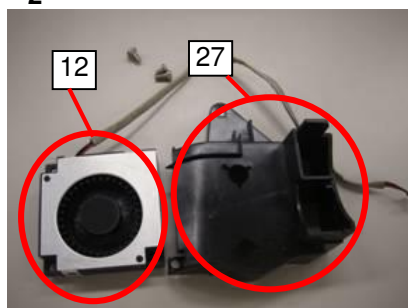

Index No.	Part No.	Description	Q'ty Per Assembly
12	Y018 2060	Fan:Cooling:(Y018)	1
27	Y018 2062	Duct(Y018)	1

2.Projector 2 (Y018/Y019/Y023-21/Y030/Y023-50)

Index No.	Part No.	Description	Q'ty Per Assembly
1	Y018 5057	Power Pack:(Y018)	1
1	Y019 5057	Power Pack:(Y019/Y023)	1
2	Y018 5065	Wire:Mercury Lamp	1
3	Y018 5067	Wire:Control:Driver	1
4	Y018 2702	Pan Head Screw:M3x5	13
5	Y018 5083	PCB:Control:(Y018)	1
5	Y019 5083	PCB:Control:(Y019)	1
5	Y023 5083	PCB:Control:(Y023)	1
6	Y018 5096	Ground Plate:Base:Upper	7
7	Y018 5052	Power Supply Unit:(Y018)	1
7	Y019 5052	Power Supply Unit:(Y019/Y023)	1
8	Y018 5074	Safety Switch	1
9	Y018 2071	Fan:Axial:Optical Unit:(Y018)	1
10	Y018 2096	Fan:Axial	1
11	Y018 2055	Blower:Lamp	1
12	Y018 2060	Fan:Cooling:(Y018)	1
13	Y018 1211	Rubber Foot:Front	1
14	Y018 1210	Rubber Foot:Rear	2
15	Y018 1061	Cover:Lower:(Y018)	1
15	Y019 1061	Cover:Lower:(Y019/Y023)	1
15	Y030 1061	Cover:Lower:(Y030)	1
16	Y018 3052	Optical Unit:Color:Wheel	1
17	Y018 2711	Pan Head Screw:M2.6x6	5
18	Y018 5094	Ground Plate:Base:Lower	1
19	Y018 3051	Optical Unit:(Y018)	1
19	Y019 3051	Optical Unit:(Y019)	1
19	Y023 3051	Optical Unit:(Y023)	1
20	Y018 5095	Shield Plate: Optical Engine	1
21	Y018 1065	Nut: Rubberfoot	3
22	Y018 2080	Case: Lamp(Y018)	1
22	Y019 2080	Case: Lamp(Y019/Y023)	1
23	Y018 2093	Thermofuse(Y018)	1
23	Y019 2093	Thermofuse(Y019/Y023)	1
24	Y018 3055	Clamp	1
25	Y018 5053	Wire:Power Source	1
26	Y018 5056	Insulating Sheet: Base(Y018)	1

Model: Rigel-PJ1c Series

Date: 8-Sep-14

No.: RY018006

Index No.	Part No.	Description	Q'ty Per Assembly
26	Y019 5056	Insulating Sheet: Base(Y019/Y023)	1
27	Y018 2062	Duct(Y018)	1
28	Y018 2073	Cushion(Y018)	1
29	Y018 5075	Safty Switch	1
30	Y018 5076	Case: Safty switch	1
31	Y018 5066	Wire: Power pack	1
32	Y018 5064	Holder: Power pack	1
33	Y018 5050	Wire: Power	1
34	Y018 8502	Decal: Warning: CHN/NA	1
34	Y018 8504	Decal: Warning: EU	1
34	Y030 8502	Decal: Warning: CHN(Y030)	1
35	Y018 8503	Decal: Caution: CHN/NA	1
35	Y018 8505	Decal: Caution: EU	1
35	Y030 8503	Decal: Caution: CHN(Y030)	1

Model: Rigel-PJ1 CX	Date: 29-Sep-14	No.: RY017001
----------------------------	-----------------	---------------

Subject: Firmware Release Note: Engine		Prepared by: S. Ishizu	
From: NA Support Sect, Solution Support Dept.			
Classification:	☐ Troubleshooting	☐ Part information	☐ Action required
	☐ Mechanical	☐ Electrical	☐ Service manual revision
	☐ Paper path	☐ Transmit/receive	☐ Retrofit information
	☐ Product Safety	☒ Other (Utility)	☒ Tier 2

This RTB has been issued to announce the firmware release information for the **Engine**.

Version	Program No.	Effective Date	Availability of RFU
C03	Y0175510	-	Not available

Note: Definition of Availability of RFU via @Remote


“Available”: The firmware can be updated via RFU or SD card.

“Not available”: The firmware can only be updated via SD card.

Version	Modified Points or Symptom Corrected
C03	Initial release


Model: Rigel-PJ1c Series		Date: 6-Nov-14	No.: RY018007
Subject: Rigel-PJ1c Parts Catalog Correction		Prepared by: Shingo Ishizu	
From: VC Products Support Sec., Solution Support Dept.			
Classification:	☐ Troubleshooting ☐ Mechanical ☐ Paper path ☐ Product Safety	☒ Part information ☐ Electrical ☐ Transmit/receive ☐ Other ()	☐ Action required ☐ Service manual revision ☐ Retrofit information ☐ Tier 2

Change/Reason: The part highlighted in **bold** was added due to a new model.

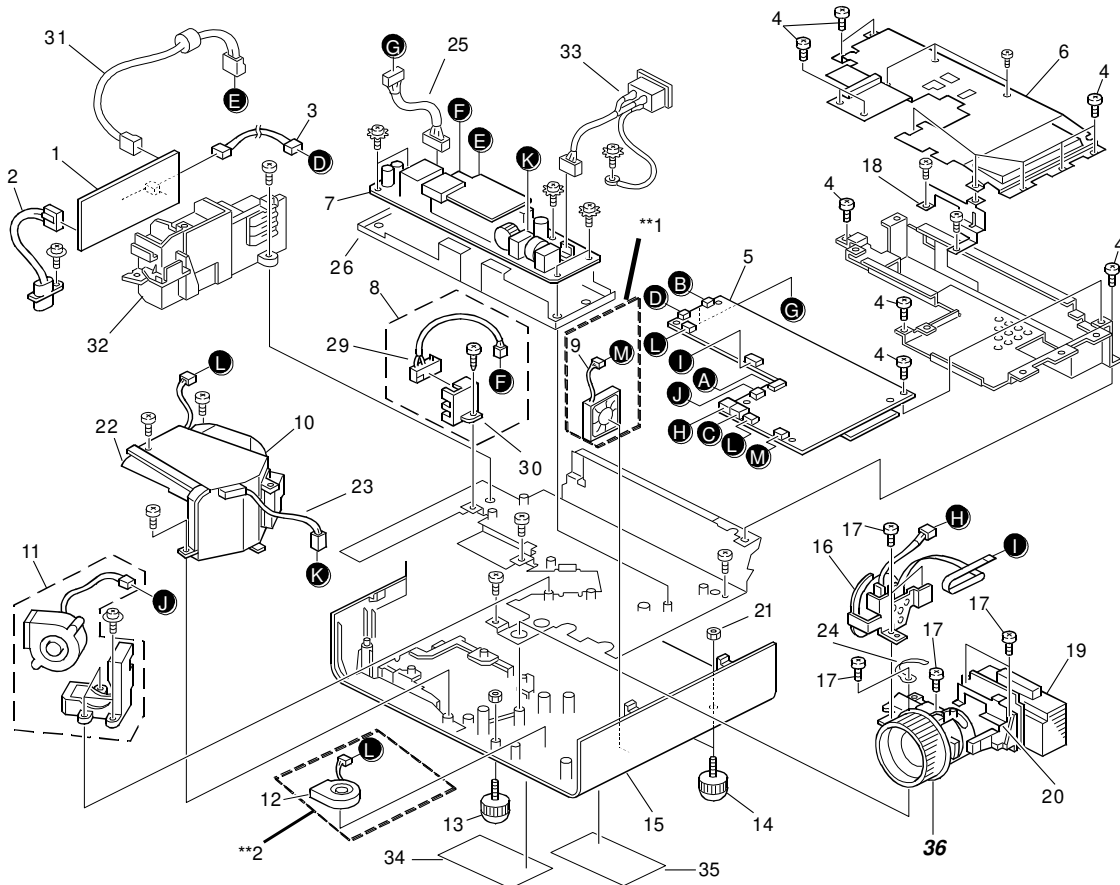

2.Projector 2 (Y018/Y019/Y023-21/Y030/Y023-50)

****1**

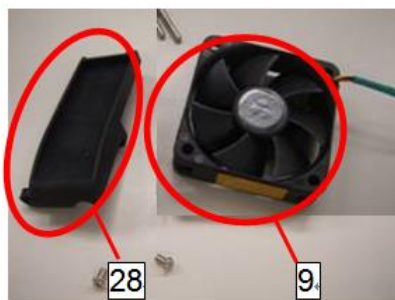


Index No.	Part No.	Description	Q'ty Per Assembly
9	Y0182071	Fan:Axial:Optical Unit:(Y018)	1
28	Y018 2073	Cushion(Y018)	1

Model: Rigel-PJ1c Series

Date: 6-Nov-14

No.: RY018007

**2

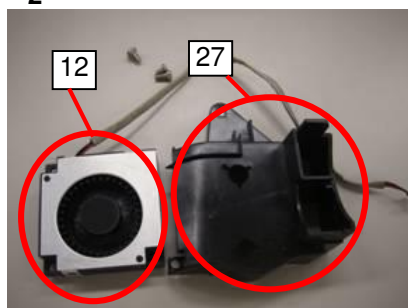

Index No.	Part No.	Description	Q'ty Per Assembly
12	Y018 2060	Fan:Cooling:(Y018)	1
27	Y018 2062	Duct(Y018)	1

2.Projector 2 (Y018/Y019/Y023-21/Y030/Y023-50)

Index No.	Part No.	Description	Q'ty Per Assembly
1	Y018 5057	Power Pack:(Y018)	1
1	Y019 5057	Power Pack:(Y019/Y023)	1
2	Y018 5065	Wire:Mercury Lamp	1
3	Y018 5067	Wire:Control:Driver	1
4	Y018 2702	Pan Head Screw:M3x5	13
5	Y018 5083	PCB:Control:(Y018)	1
5	Y019 5083	PCB:Control:(Y019)	1
5	Y023 5083	PCB:Control:(Y023)	1
6	Y018 5096	Ground Plate:Base:Upper	7
7	Y018 5052	Power Supply Unit:(Y018)	1
7	Y019 5052	Power Supply Unit:(Y019/Y023)	1
8	Y018 5074	Safety Switch	1
9	Y018 2071	Fan:Axial:Optical Unit:(Y018)	1
10	Y018 2096	Fan:Axial	1
11	Y018 2055	Blower:Lamp	1
12	Y018 2060	Fan:Cooling:(Y018)	1
13	Y018 1211	Rubber Foot:Front	1
14	Y018 1210	Rubber Foot:Rear	2
15	Y018 1061	Cover:Lower:(Y018)	1
15	Y019 1061	Cover:Lower:(Y019/Y023)	1
15	Y030 1061	Cover:Lower:(Y030)	1
16	Y018 3052	Optical Unit:Color:Wheel	1
17	Y018 2711	Pan Head Screw:M2.6x6	5
18	Y018 5094	Ground Plate:Base:Lower	1
19	Y018 3051	Optical Unit:(Y018)	1
19	Y019 3051	Optical Unit:(Y019)	1
19	Y023 3051	Optical Unit:(Y023)	1
20	Y018 5095	Schild Plate: Optical Engine	1
21	Y018 1065	Nut: Rubberfoot	3
22	Y018 2080	Case: Lamp(Y018)	1
22	Y019 2080	Case: Lamp(Y019/Y023)	1
23	Y018 2093	Thermofuse(Y018)	1
23	Y019 2093	Thermofuse(Y019/Y023)	1
24	Y018 3055	Clamp	1
25	Y018 5053	Wire:Power Source	1
26	Y018 5056	Insulating Sheet: Base(Y018)	1

Model: Rigel-PJ1c Series	Date: 6-Nov-14	No.: RY018007
--------------------------	----------------	---------------

Index No.	Part No.	Description	Q'ty Per Assembly
26	Y019 5056	Insulating Sheet: Base(Y019/Y023)	1
27	Y018 2062	Duct(Y018)	1
28	Y018 2073	Cushion(Y018)	1
29	Y018 5075	Safty Switch	1
30	Y018 5076	Case: Safty switch	1
31	Y018 5066	Wire: Power pack	1
32	Y018 5064	Holder: Power pack	1
33	Y018 5050	Wire: Power	1
34	Y018 8502	Decal: Warning: CHN/NA	1
34	Y018 8504	Decal: Warning: EU	1
34	Y030 8502	Decal: Warning: CHN(Y030)	1
35	Y018 8503	Decal: Caution: CHN/NA	1
35	Y018 8505	Decal: Caution: EU	1
35	Y030 8503	Decal: Caution: CHN(Y030)	1
36	Y018 1205	Focus Ring	1

Model: Antares-PJ1/Rigel-CX/Rigel-PJ1	Date: 20-May-16	No.: RY020011
---------------------------------------	-----------------	---------------

Subject: Firmware Release Note: FW Update		Prepared by: S. Ishizu	
From: VC Products Support Sect, Solution Support Dept.			
Classification:	☐ Troubleshooting	☐ Part information	☐ Action required
	☐ Mechanical	☐ Electrical	☐ Service manual revision
	☐ Paper path	☐ Transmit/receive	☐ Retrofit information
	☐ Product Safety	☒ Other (Firmware)	☒ Tier 2

This RTB has been issued to announce the firmware release information for the **FW Update**.

Version	Program No.	Effective Date	Availability of RFU
9.2	Y0185520	May 2016 production	Not available

Note: Definition of Availability of RFU via @Remote

“Available”: The firmware can be updated via RFU or SD card.

“Not available”: The firmware can only be updated via SD card.

Version	Modified Points or Symptom Corrected
9.2	Additional Model Information: PJ S2130, PJ X2130, PJ WX2130, PJ X5260, PJ WX5140, PJ WX5150, PJ X5140

Model: Rigel-PJ1

Date: 2-MAY-17

No.: RY018008

Subject: Parts Catalog for K130 (Y03027)

Prepared by: T. Sakakibara

From: VC Product Support Sect., Project Management Dept.

Classification:

☐ Troubleshooting

☒ Part information

☐ Action required

☐ Mechanical

☐ Electrical

☒ Service manual revision

☐ Paper path

☐ Transmit/receive


☐ Retrofit information

☐ Product Safety

☐ Other (Firmware)

☐ Tier 2

Index SN	Description	Qty
1 Y0301123	Cover Upper	1
2 Y0181096	Speaker	1
3 Y0301085	Cover Rear	1
4 Y0182704	Hexagon Head Bolt	8
5 Y0301133	Keytop	1
6 Y0181134	PCB Keytop	1
7 Y0301204	Ring Zoom	1
8 Y0181136	Wire Keytop	1
9 Y018120	Holder Ring Zoom	1
10 Y0182702	Pan Head Screw M3x5	9
11 Y0181110	Cover Front	1
12 Y0181064	Cap Lens	1
13 Y0206077	Power Supply Cord	1
14 Y0186095	Soft Case	1
15 Y0206084	Cable RGB	1
16 Y0306082	Remote Controller	1
17 Y0301150	Filter Left Ass'y	1
18 Y0301155	Filter Right Ass'y	1
19 Y0301140	Cover Lamp Ass'y	1
20 Y0181135	Shield Plate Key Board	1
21 Y0185051	Bracket Power Cord	1

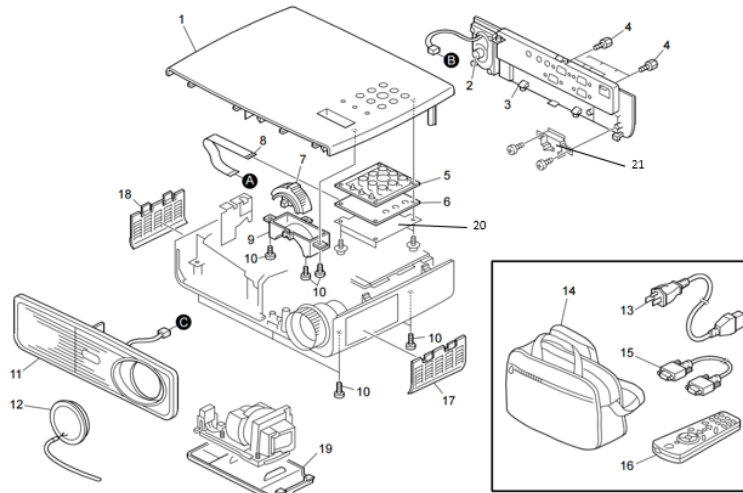

1 Y0195057	Power Pack	1
2 Y0185065	Wire Mercury Lamp	1
3 Y0185067	Wire Control Driver	1
4 Y0182702	Pan Head Screw M3x5	13
5 Y0235083	PCB Control	1
6 Y0185096	Ground Plate Base Upper	7
7 Y0195052	Power Supply Unit	1
8 Y0185074	Safety Switch	1
9 Y0182096	Fan Axial Optical Unit	1
10 Y0182079	Case Lamp	1
11 Y0182055	Blower Lamp	1
12 Y0182060	Fan Cooling	1
13 Y0181211	Rubber Foot Front	1
14 Y0181210	Rubber Foot Rear	2
15 Y0301061	Cover Lower	1
16 Y0183052	Optical Unit Color Wheel	1
17 Y0182711	Pan Head Screw M2.6x6	5
18 Y0185096	Ground Plate Base Lower	1
19 Y0233051	Optical Unit	1
20 Y0185095	Shield Plate Optical Engine	1
21 Y0181065	Nut Rubberfoot	3
22 Y0182079	Case Lamp	1
23 Y0192093	Thermofuse	1
24 Y0183055	Clamp	1
25 Y0185053	Wire Power Source	1
26 Y0185056	Isulating Sheet Base	1
27 Y0185075	Safety Switch	1
28 Y0185076	Case Safety Switch	1
29 Y0185066	Wire Power pack	1
30 Y0185064	Holder Power pack	1

