


Pro C901s

Operating Instructions Network Guide



- 1 Monitoring and Configuring the Machine
- 2 Appendix

TABLE OF CONTENTS

Manuals for This Machine	4
Notice	6
Important	6
How to Read This Manual	7
Symbols	7
Notes	7
About IP Address	7
1. Monitoring and Configuring the Machine	
Using Web Image Monitor	9
Displaying Top Page	10
When User Authentication is Set	12
About Menu and Mode	12
Access in the Administrator Mode	14
List of Setting Items	14
Displaying Web Image Monitor Help	19
Machine Status Notification by E-Mail	
Setting the Account for E-mail Notification	23
Mail Authentication	24
Auto E-mail Notification	25
On-demand E-mail Notification	25
Format of On-demand E-mail Messages	26
Remote Maintenance by telnet	30
Using telnet	30
access	31
autonet	32
devicename	32
dhcp	33
dhcp6	34
dns	34
domainname	36
help	37
hostname	37
ifconfig	37

ipsec	38
ipv6	39
logout	39
netware	39
passwd	40
pathmtu	41
route	41
set	43
show	45
smb	45
snmp	45
sntp	48
ssdp	49
ssh	50
syslog	50
upnp	51
web	51
wins	52
Understanding the Displayed Information	53
Configuring the Network Interface Board	53
Message List	59
System Log Information	59
2. Appendix	
Using DHCP	67
Using AutoNet	67
Configuring the WINS Server	68
Using Web Image Monitor	68
Using telnet	68
Using the Dynamic DNS Function	70
Updating	70
DNS servers targeted for operation	71
DHCPv4 servers targeted for operation	
Setting the dynamic DNS function	71

Setting Up the Machine on a Network	73
System Settings	73
System Settings	76
Specifications	81
Trademarks	83
INDEX	85

Manuals for This Machine

Read this manual carefully before you use this machine.

Refer to the manuals that are relevant to what you want to do with the machine.

Mportant (

- Media differ according to manual.
- The printed and electronic versions of a manual have the same contents.
- Adobe Acrobat Reader/Adobe Reader must be installed in order to view the manuals as PDF files.
- A Web browser must be installed in order to view the html manuals.

About This Machine

Before using the machine, be sure to read the section of this manual entitled Safety Information.

This manual introduces the machine's various functions. It also explains the control panel, preparation procedures for using the machine, how to enter text, and how to install the CD-ROMs provided.

Troubleshooting

Provides a guide to resolving common usage-related problems, and explains how to replace paper, toner, staples, and other consumables.

Copy/Document Server Reference

Explains Copier and Document Server functions and operations. Also refer to this manual for explanations on how to place originals.

Scanner Reference

Explains Scanner functions and operations.

Network Guide

Explains how to configure and operate the machine in a network environment.

General Settings Guide

Explains how to connect the machine to a network. Also explains how to change User Tools settings, and how to register information in the Address Book.

Paper Settings Reference

Explains how to make paper settings.

Security Reference

This manual is for administrators of the machine. It explains security functions that you can use to prevent unauthorized use of the machine, data tampering, or information leakage. For enhanced security, we recommend that you first make the following settings:

- Install the Device Certificate.
- Enable SSL (Secure Sockets Layer) Encryption.

• Change the user name and password of the administrator using Web Image Monitor.

For details, see "Setting Up the Machine", Security Reference.

Be sure to read this manual when setting the enhanced security functions, or user and administrator authentication.



- In addition to the above, manuals are also provided for the Printer function.
- The following optional software products are referred to using general names:

Product name	General name	
ScanRouter EX Professional and ScanRouter	the ScanRouter delivery software	
EX Enterprise		

Notice

Important

In no event will the company be liable for direct, indirect, special, incidental, or consequential damages as a result of handling or operating the machine.

For good copy quality, the manufacturer recommends that you use genuine toner from the manufacturer.

The manufacturer shall not be responsible for any damage or expense that might result from the use of parts other than genuine parts from the manufacturer with your office products.

How to Read This Manual

Symbols

This manual uses the following symbols:

Indicates points to pay attention to when using the machine, and explanations of likely causes of paper misfeeds, damage to originals, or loss of data. Be sure to read these explanations.

UNote

Indicates supplementary explanations of the machine's functions, and instructions on resolving user errors.

■ Reference

This symbol is located at the end of sections. It indicates where you can find further relevant information.

[]

Indicates the names of keys on the machine's display or control panels.

Notes

Contents of this manual are subject to change without prior notice.

Some illustrations in this manual might be slightly different from the machine.

Certain options might not be available in some countries. For details, please contact your local dealer.

Depending on which country you are in, certain units may be optional. For details, please contact your local dealer.

About IP Address

In this manual, "IP address" covers both IPv4 and IPv6 environments. Read the instructions that are relevant to the environment you are using.

1. Monitoring and Configuring the Machine

This chapter describes how to monitoring and configuring the machine.

Using Web Image Monitor

Using Web Image Monitor, you can check the machine status and change settings.

Available operations

The following operations can be remotely performed using Web Image Monitor from a client computer.

- · Displaying machine status or settings
- Checking the job status or history
- Checking, modifying, printing, or deleting print jobs stored in the Document Server
- · Resetting the machine
- Managing the Address Book
- Making machine settings
- Making network protocol settings
- · Making security settings

Configuring the machine

To perform the operations from Web Image Monitor, TCP/IP is required. After the machine is configured to use TCP/IP, operations from Web Image Monitor become available.

Recommended Web browser

• Windows:

Internet Explorer 5.5 SP2 or higher

Firefox 1.0 or higher

Mac OS:

Firefox 1.0 or higher

Safari 1.0, 1.2, 2.0 (412.2) or higher

Web Image Monitor supports screen reader software. We recommend JAWS 7.0 or a later version.



- Safari cannot be used on Mac OS X 10.4.1.
- Display and operation problems can occur if you do not enable JavaScript and cookies, or if you are
 using a non-recommended Web Browser.

- If you are using a proxy server, change the Web browser settings. Contact your administrator for information about the settings.
- Machine information is not automatically updated. To perform an update, click [Refresh] in the display area.
- We recommend using Web Image Monitor in the same network.
- You cannot access to the machine from outside the firewall.
- When using the machine under DHCP, the IP address may be automatically changed by the DHCP server settings. Enable DDNS setting on the machine, and then connect using the machine's host name.
 Alternatively, set a static IP address to the DHCP server.
- If the HTTP port is disabled, connection to the machine using the machine's URL cannot be established. SSL setting must be enabled on this machine. For details, consult your network administrator.
- When using the SSL encryption protocol, enter "https://(machine's IP address or host name)/".
- Internet Explorer must be installed on your computer. Use the most recent available version. We recommend Internet Explorer 6.0 or later.
- When you are using Firefox, fonts and colors may be different, or tables may be out of shape.
- When using a host name under Windows Server 2003/2003 R2/2008/2008 R2 or Windows Vista/7 with IPv6 protocol, perform host name resolution using an external DNS server. The host file cannot be used.
- To use JAWS 7.0 under Web Image Monitor, you must be running Windows OS and Microsoft Internet Explorer 5.5 SP2, or a later version.
- If you are using Internet Explorer 8, downloading will be slower than with other browsers. To download faster with Internet Explorer 8, open the browser's [Internet Options] menu and register the machine's URL as a trusted site. Then disable SmartScreen filter for trusted sites. For details about these settings, see the Internet Explorer 8 Help files.
- You can access Web Image Monitor more quickly by registering the machine's URL as a bookmark.
 Note that the URL you register must be the URL of the top page, which is the page that appears before login. If you register the URL of a page that appears after login, Web Image Monitor will not open properly from the bookmark.

Displaying Top Page

This section explains the Top Page and how to display Web Image Monitor.



- When entering an IPv4 address, do not begin segments with zeros. For example: If the address is "192.168.001.010", you must enter it as "192.168.1.10".
- 1. Start your Web browser.


2. Enter "http://(machine's IP address or host name)/" in your Web browser's URL bar.

Top Page of Web Image Monitor appears.

If the machine's host name has been registered on the DNS or WINS server, you can enter it.

When setting SSL, a protocol for encrypted communication, under environment which server authentication is issued, enter "https://(machine's IP address or host name)/".

Every Web Image Monitor page is divided into the following areas:

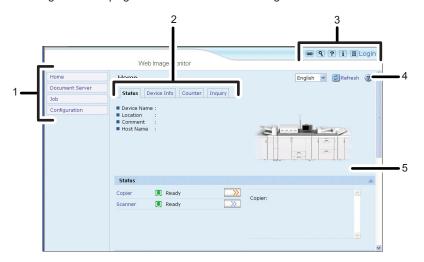

CAE001

1. Menu area

If you select menu, it's content will be shown on the work area.

2. Tab area

Details about each menu appears.

3. Header area

The dialog box for switching to the user mode and administrator mode appears, and each mode's menu will be displayed.

The link to help and dialog box for keyword search appears.

4. Help

Use Help to view or download Help file contents.

5. Work area

Displays the contents of the item selected in the menu area.

Machine information in the work area is not automatically updated. Click [Refresh] at the upper right in the work area to update the machine information. Click the Web browser's [Refresh] button to refresh the entire browser screen.



 When using a host name under Windows Server 2003/2003 R2/2008/2008 R2 or Windows Vista/7 with IPv6 protocol, perform host name resolution using an external DNS server. The host file cannot be used.

When User Authentication is Set

Logging in Using Web Image Monitor

Follow the procedure below to log in when user authentication is set.

- 1. Click [Login].
- Enter a login user name and password, and then click [Login].
 For details about the login user name and password, consult your network administrator.



- For user code authentication, enter a user code in [Login User Name], and then click [Login].
- The procedure may differ depending on the Web browser used.

Logging out Using Web Image Monitor

Click [Logout] to log out.



• When you log in and made the setting, always click [Logout].


About Menu and Mode

There are two modes available with Web Image Monitor: guest mode and administrator mode.

Displayed Items may differ depending on the machine type.

Guest Mode

In the guest mode, machine status, settings, and job status can be viewed, but the machine settings cannot be changed.

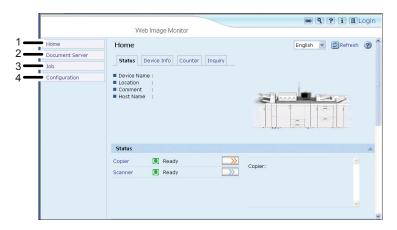

CAE002

1. Home

The [Status], [Device Info], [Counter], and [Inquiry] tab are displayed. Details of the tab menu are displayed on the work area.

2. Document Server

Display files stored in the Document Server.

3. Job


Display all jobs.

4. Configuration

Display current machine and network settings.

Administrator Mode

In the administrator mode, you can configure various machine settings.

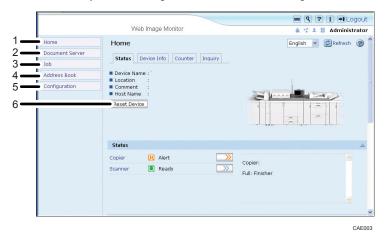

1. Home

The [Status], [Device Info], [Counter], and [Inquiry] tab are displayed. Details of the tab menu are displayed on the work area.

2. Document Server

Display files stored in the Document Server.

3. Job

Display all jobs.

4. Address Book

User information can be registered, displayed, changed, and deleted.

5. Configuration

Make system settings for the machine, interface settings, and security.

6. Reset Device

To restart the machine, click the [Reset Device] button on the top page.

Access in the Administrator Mode

Follow the procedure below to access Web Image Monitor in the administrator mode.

1. On Top Page, click [Login].

The window for entering the login user name and password appears.

2. Enter your login user name and password, and then click [Login].

For details about the login user name and password, consult your network administrator.

Depending on the configuration of your Web browser, the login user name and password might be saved. If you do not want to save them, configure your Web browser's settings so that this information is not saved.

List of Setting Items

The following tables show Web Image Monitor items that can be viewed or modified depending on the selected mode on the Web browser. Select one of the following modes to log in Web Image Monitor:

- Guest mode: logged in as a user
- Administrator mode: logged in as an administrator

Home

Status

Menu	Guest mode	Administrator mode
Reset Device	None	Modify
Toner	Read	Read

Menu	Guest mode	Administrator mode
Input Tray	Read	Read
Output Tray	Read	Read

Device Info

Menu	Guest mode	Administrator mode
Functions	Read	Read
System	Read	Read
Version	Read	Read

Counter

Menu	Guest mode	Administrator mode
Total	Read	Read
Copier	Read	Read
Printer	Read	Read
Send/TX Total	Read	Read
Scanner Send	Read	Read
Other Function(s)	Read	Read

Inquiry

Menu	Guest mode	Administrator mode
Machine Maintenance/Repair	Read	Read
Sales Representative	Read	Read
Consumables	Read	Read

Document Server

Menu	Guest mode	Administrator mode
Document Server	Read/Modify	Read/Modify

Job

Job List

Menu	Guest mode	Administrator mode
Current/Waiting Jobs	Read	Read/Modify
Job History	Read	Read

Document Server

Menu	Guest mode	Administrator mode
Print Job History	Read/Modify	Read/Modify
Scanner Remote Send History	Read/Modify	Read/Modify

Address Book

Menu	Guest mode	Administrator mode
Address List	None	Read/Modify

Configuration

Device Settings

Menu	Guest mode	Administrator mode
System	Read	Read/Modify
Paper	Read	Read/Modify
Custom Paper	None	Read/Modify
Date/Time	Read	Read/Modify
Timer	Read	Read/Modify
E-mail	Read	Read/Modify
Auto E-mail Notification	None	Read/Modify
On-demand E-mail Notification	None	Read/Modify
File Transfer	None	Read/Modify

1

Menu	Guest mode	Administrator mode
User Authentication Management	None	Read/Modify
Administrator Authentication Management	None	Read/Modify
Program/Change Administrator	None	Read/Modify
LDAP Server	None	Read/Modify
Firmware Update	None	Read/Modify

Scanner

Menu	Guest mode	Administrator mode
General Settings	Read	Read/Modify
Scan Settings	Read	Read/Modify
Send Settings	Read	Read/Modify
Initial Settings	None	Read/Modify
Default Settings for Normal Screens on Device	Read	Read/Modify
Default Settings for Simplified Screens on Device	Read	Read/Modify

Interface

Menu	Guest mode	Administrator mode
Interface Settings	Read	Read

Network

Menu	Guest mode	Administrator mode
IPv4	Read	Read/Modify
IPv6	Read	Read/Modify

Menu	Guest mode	Administrator mode
NetWare	Read	Read/Modify
SMB	Read	Read/Modify
SNMP	None	Read/Modify
SNMPv3	None	Read/Modify
SSDP	None	Read/Modify
System Log	Read	Read

Security

Menu	Guest mode	Administrator mode
Network Security	None	Read/Modify
Access Control	None	Read/Modify
SSL/TLS	None	Read/Modify
ssh	None	Read/Modify
Site Certificate	None	Read/Modify
Device Certificate	None	Read/Modify
IPsec	None	Read/Modify
S/MIME	None	Read/Modify

RC Gate

Menu	Guest mode	Administrator mode
Setup RC Gate	None	Read/Modify
Update RC Gate Firmware	None	Read
RC Gate Proxy Server	None	Read/Modify

Webpage

Menu	Guest mode	Administrator mode
Webpage	Read	Read/Modify

Extended Feature Settings

Menu	Guest mode	Administrator mode
Startup Setting	None	Read/Modify
Extended Feature Info	None	Read
Install	None	Read/Modify
Uninstall	None	Read/Modify
Change Allocation	None	Read/Modify
Administrator Tools	None	Read/Modify
Copy Extended Features	None	Read/Modify
Copy Card Save Data	None	Read/Modify



• Some items are not displayed depending on the security settings.

Displaying Web Image Monitor Help

When using Help for the first time, clicking the Help button (makes the following screen appear, in which you can view Help in two different ways, as shown below:

Viewing Help on our Web site

You can view the latest Help information.

Downloading and checking Help

You can download the Web Image Monitor Help file to your computer's local disk so you can access Help directly. Alternatively, you can store the Help file on the Web server and associate it with the Help button, which will allow you to access Help without connecting to the Internet.



- By clicking the Help button (2) in the header area, the contents of Help appear.
- By clicking the Help button (?) in the work area, Help for the setting items in the work area appears.

Downloading Help


- 1. In the [OS] list, select the operating system.
- 2. In the [Language] list, select the language.
- 3. Click [Download].
- 4. Download Help by following the instructions on the screen.
- 5. Store the downloaded compressed file in a given location, and then decompress the file.
 To create a link for the Help button (???), save the downloaded Help files on a file server or Web server.

Linking the URL of the downloaded Help

You can link the URL of the Help file on the file server or Web server to the Help button (23).

- 1. Log in to Web Image Monitor in the administrator mode.
- 2. In the menu area, click [Configuration].
- 3. Click [Webpage].
- 4. In the [Set Help URL Target] box, enter the URL of the Help file.

 If the URL of the Help file on the Web server is "http://a.b.c.d/HELP/EN/index.html", enter "http://a.b.c.d/HELP/".
- 5. Click [OK].



• If you save the Help files on your hard disk, you must access them directly - you cannot link to them using the Help button (??).

Machine Status Notification by E-Mail

Whenever a paper tray becomes empty or paper is jammed, an e-mail alert is issued to the registered addresses to notify the machine status.

For this notification, you can make the e-mail notification settings.

Notification timing and e-mail content can be set.

Mportant (

Depending on your e-mail application, a phishing warning might appear after you receive an e-mail
message. To prevent phishing warnings appearing after you receive e-mail from a specified sender,
you must add the sender to your e-mail application's exclusion list. For details about how to do this,
see your e-mail application's Help.

The e-mail notification functions you can set are as follows:

- Auto e-mail notification
 - Information including the machine status is automatically sent by e-mail. Before you use this function, register the e-mail address to be used.
- On-demand e-mail notification

Information including the machine status is sent by e-mail when a request e-mail from the administrator is received.

You can be notified of the following events:

- Call Service
- Out of Toner
- Paper Misfeed
- Cover Open
- Out of Paper
- Almost Out of Paper
- Paper Tray Error
- Output Tray Full
- Unit Connection Error
- Replacement Required: PCU
- Waste Toner Bottle is Full
- Waste Toner Bottle is Almost Full
- Add Staples
- Replacement Required: Fusing Unit
- Replacement Required: Transfer Unit

- Replacement Required Soon: Fusing Unit
- Replacement Required Soon: PCU
- Hole Punch Receptacle is Full
- Replacement Required Soon: Cleaning Web
- File Storage Memory Full Soon
- Replacement Required: Cleaning Web
- Waste Staple Receptacle is Full
- Replacement Required Soon: Transfer Unit
- Replacement Required: Charger
- Replacement Required Soon: Charger
- · Replacement Required: Cleaning Unit for Photoconductor Unit
- Replacement Required Soon: Cleaning Unit for Photoconductor Unit
- Replacement Required: Cleaning Unit for Intermediate Transfer Belt
- Replacement Required Soon: Cleaning Unit for Intermediate Transfer Belt
- No Developer
- Almost Out of Developer
- Out of Binding Ring Combs
- · Out of Binding Glue
- Waste Paper Receptacle is Full
- Binder Tray Error
- Replacement Required: Toner Filter
- Replacement Required Soon: Toner Filter
- Replacement Required: Paper Feed Roller
- Replacement Required Soon: Paper Feed Roller
- Replacement Required: Perfect Binder Paper Cutter
- Replacement Required: Binding Glue Tank
- 1. Log in to Web Image Monitor in administrator mode.
- 2. In the menu area, click [Configuration].
- 3. Click [E-mail] on the [Device Settings] area.
- 4. Make the following settings:
 - Items in the Reception column: Make the necessary settings for receiving e-mail.
 - Items in the SMTP column: Configure the SMTP server. Check your mailing environment, and then specify the necessary items. You can also perform mail authentication for the SMTP server.

- Items in the POP before SMTP column: Configure the POP server. Check your mailing environment, and then specify the necessary items. You can also perform mail authentication for the POP server.
- Items in the POP3/IMAP4 column: Configure the POP3 or IMAP4 server. Check your mailing environment, and then specify the necessary items.
- Items in the E-mail Communication Port column: Configure the port to be used for access to the mail server.
- Items in the E-mail Notification Account column: Specify these items if you want to use e-mail notification.
- 5. Click [OK].
- 6. Click [Logout].
- 7. Quit Web Image Monitor.



- For details about login user name and password, see Security Reference, which is the administrator's manual.
- For details about the settings, see Web Image Monitor Help.
- For details about Web Image Monitor, see "Using Web Image Monitor".

■ Reference

• p.9 "Using Web Image Monitor"

Setting the Account for E-mail Notification

Before you use Auto E-mail Notification or On-demand E-mail notification, setup an e-mail account to be used for the function. Perform the following configuration task in Web Image Monitor.

- 1. Log in to Web Image Monitor in administrator mode.
- Click [Configuration] in the menu area, and then click [E-mail] on the [Device Settings] area.
- 3. Make the following settings in E-mail Notification Account:
 - E-mail Notification E-mail Address: Enter the address using alphanumeric characters. This will
 appear as the sender (From:) of the e-mail notification. Send requests for e-mail notification to
 this address.
 - Receive E-mail Notification: Specify whether to use on-demand e-mail notification.
 - E-mail Notification User Name: Enter the specified user name for the e-mail account in "E-mail Notification E-mail Address".
 - E-mail Notification Password: Enter the specified password for the e-mail account in "E-mail Notification E-mail Address".
- 4. Click [OK].

- 5. Click [Logout].
- 6. Quit Web Image Monitor.

Mail Authentication

You can configure mail authentication to prevent illegal use of the mail server.

SMTP Authentication

Specify SMTP authentication.

When mail is sent to the SMTP server, authentication is performed using the SMTP AUTH protocol by prompting the mail originator to enter the user name and password. This prevents illegal use of the SMTP server.

- 1. Log in to Web Image Monitor in administrator mode.
- 2. Click [Configuration] in the menu area, and then click [E-mail] on the [Device Settings] area.
- 3. Make the following settings in SMTP column:
 - SMTP Server Name: Enter the IP address or host name of the SMTP server
 - SMTP Port No.: Enter the port number used when sending e-mail to the SMTP server.
 - SMTP Authentication: Enable or disable SMTP authentication.
 - SMTP Auth. E-mail Address: Enter the e-mail address.
 - SMTP Auth. User Name: Enter the SMTP account name.
 - SMTP Auth. Password: To set or change the password for SMTP AUTH.
 - SMTP Auth. Encryption: Select whether to encrypt the password or not.

[Auto Select]: If the authentication method is PLAIN, LOGIN, CRAM-MD5, or DIGEST-MD5.

[Active]: If the authentication method is CRAM-MD5 or DIGEST-MD5.

[Inactive]: If the authentication method is PLAIN or LOGIN.

- 4. Click [OK]
- 5. Click [Logout].
- 6. Quit Web Image Monitor.

POP before SMTP Authentication

Select whether to log in to the POP3 server before sending e-mail.

- 1. Log in to Web Image Monitor in administrator mode.
- 2. Click [Configuration] in the menu area, and then click [E-mail] on the [Device Settings] area.
- 3. Make the following settings in POP before SMTP column:
 - POP before SMTP: Enable or disable POP before SMTP.

- POP E-mail Address: Enter the e-mail address.
- POP User Name: Enter the POP account name.
- POP Password: To set or change the POP password.
- Timeout setting after POP Auth.: Enter the time available before connecting to the SMTP server after logging in to the POP server.
- 4. Click [OK].
- 5. Click [Logout].
- 6. Quit Web Image Monitor.

Auto E-mail Notification

- 1. Log in to Web Image Monitor in administrator mode.
- Click [Configuration] in the menu area, and then click [Auto E-mail Notification] on the [Device Settings] area.

The dialog box for making notification settings appears.

- 3. Make the following settings:
 - Notification Message column: You can set this according to your needs, for example, the machine's location, service representative contact information.
 - Items in the Groups to Notify column: E-mail notification addresses can be grouped as required.
 - Items in the Select Groups/Items to Notify column: Select groups for each notification type, such
 as machine status and error.

To make detailed settings for these items, click [Edit] next to "Detailed Settings of Each Item".

- 4. Click [OK].
- 5. Click [Logout].
- Quit Web Image Monitor.



- For details about Web Image Monitor, see "Using Web Image Monitor".
- For details about the settings, see Web Image Monitor Help.

Reference

• p.9 "Using Web Image Monitor"

On-demand E-mail Notification

1. Log in to Web Image Monitor in administrator mode.

2. Click [Configuration] in the menu area, and then click [On-demand E-mail Notification] on the [Device Settings] area.

The dialog box for making notification settings appears.

- 3. Make the following settings:
 - Notification Subject column: Enter a text string to be added to the subject line of return e-mails.
 - Notification Message column: You can set this according to your needs, for example, the machine's location, service representative contact information.
 - Items in the Access Restriction to Information column: Select whether to restrict accesses based on a specific category of information.
 - Items in the Receivable E-mail Address/Domain Name Settings column: Enter an e-mail address
 or domain name to use for requesting information by e-mail and to receive its return e-mail.
- 4. Click [OK].
- 5. Click [Logout].
- 6. Quit Web Image Monitor.



- For details about Web Image Monitor, see "Using Web Image Monitor".
- For details about the settings, see Web Image Monitor Help.

Reference

• p.9 "Using Web Image Monitor"

Format of On-demand E-mail Messages

To use "on-demand e-mail notification", you need to send a request e-mail with a particular format to the machine.

Using your mail software, enter the following:

Format of the request e-mail

ltem	Description
То	Enter the specified e-mail address in "E-mail Notification E-mail Address".
Subject	Enter a request regarding the device. For details, see the table below.
From	Specify a valid mail address. The device information will be sent to the address specified here.

- For details about specifying [E-mail Notification E-mail Address], see "Setting the Account for E-mail Notification".
- E-mail may be incomplete if sent immediately after power on.

■ Reference

• p.23 "Setting the Account for E-mail Notification"

Subject field

Format: devicestatus?parameter-name=parameter[&=parameter][& =parameter]...



- The Subject field is case-insensitive.
- Parameter names can be written in any order.

Subject field coding examples

Coding example	Action
devicestatus?request=sysconfig& format=text⟨=en	The device's system configuration information will be sent in an English text format.
devicestatus?request=sysconfig	The device's system configuration information will be sent in a preset format and language.



- The Subject field is case-insensitive.
- Parameter names can be written in any order.

Parameters

Parameter	Meaning	Default
request	Information to be obtained	Mandatory
format	Mail format	Mail will be sent in the format preset for each mail address.
lang	Language for mail body	Mail will be sent in the language preset for each mail address.

Parameters specifying the information to be obtained

Information to be obtained	Parameter
System configuration information	sysconfig
Network configuration information	netconfig
Printer configuration information	prtconfig
Supplies information	supply
Device status information	status

Parameters specifying the mail format

Mail format	Parameter
Text	text
HTML	html
XML	xml



• HTML and XML can be selected for subject field, but output is text only.

Parameters that specify the language for mail bodies

Language	Parameter
English	en

Language in which Web Image Monitor items are displayed	Parameter
French	fr
German	de
Italian	it
Spanish	es
Dutch	nl
Danish	da
Finnish	fi

Language in which Web Image Monitor items are displayed	Parameter
Norwegian	no
Portuguese	pt
Swedish	sv
Czech	CS
Hungarian	hu
Polish	pl
Russian	ru
Turkish	tr
Catalan	ca



• For the language used in the body of the mail, you can select either English or the language in which the Web Image Monitor items are displayed. For example: if the Web Image Monitor items are displayed in German, you can select either German or English.

Remote Maintenance by telnet

Important

- Remote Maintenance should be protected so that access is allowed to administrators only.
- The password is the same as the one of Web Image Monitor administrator. When the password is changed using "mshell", other's change also.

Using telnet

Follow the procedure below to use telnet.

Important

- Only one user at a time can log in to perform remote maintenance.
- If you are using Windows Vista/7, you must enable the telnet server and telnet client beforehand.
- 1. Use the IP address or the host name of the machine to start telnet.

% telnet "IP address"

For example, if the machine's IP address is "192.168.15.16", enter the address as follows:

% telnet 192.168.15.16

2. Enter your user name and password.

For details about the user name and password, consult your network administrator.

- 3. Enter a command.
- 4. Quit telnet.

msh> logout

The configuration message about saving the changes appears.

5. Enter "yes" to save the changes, and then press the [Enter] key.

If you do not want to save the changes, enter "no", and then press the [Enter] key. To make further changes, enter "return" at the command line, and then press the [Enter] key.



- If the message "Can not write NVRAM information" appears, the changes are not saved. Repeat the procedure above.
- When the changes are saved, the network interface board is reset automatically with that changes.

access

Use the "access" command to view and configure access control. You can also specify two or more access ranges.

View settings

msh> access

IPv4 configuration display

msh> access ID range

IPv6 configuration display

msh> access ID range6

IPv6 access mask configuration display

msh> access ID mask6

IPv4 configuration

msh> access ID range "start-address end-address"

Example: to specify accessible IPv4 addresses between 192.168.0.10 and 192.168.0.20:

msh> access 1 range 192.168.0.10 192.168.0.20

IPv6 configuration

msh> access ID range6 "start-address end-address"

Example: to specify accessible IPv6 addresses between 2001:DB8::100 and 2001:DB8::200.

msh> access 1 range6 2001:DB8::100 2001:DB8::200

IPv6 access mask configuration

msh> access ID mask6 "base-address prefixlen"

Example: to specify accessible IPv6 addresses to 2001:DB8::/32

msh> access 1 mask6 2001:DB8:: 32

Access control initialization

msh> access flush

• Use the "flush" command to restore the default settings so that all access ranges become "0.0.0.0" for IPv4, and "::" for IPv6.

₩Note

- You can specify each IPv6 entry by either range or mask. For the range parameter, you can select "start-address end-address". For the mask parameter, you can select "baseaddress prefixlen".
- Valid ranges must be from lower (start address) to higher (end address).
- For IPv4 and IPv6, you can select an ID number between 1 and 5.
- IPv6 can register and select the range and the mask for each access ranges.

- 1
- IPv6 mask ranges between 1 128 can be selected.
- Up to five access ranges can be specified. The entry is invalid if the target number is omitted.
- You cannot access Web Image Monitor from a restricted IP address.

autonet

Use the "autonet" command to configure AutoNet parameters.

View settings

The following command displays the current AutoNet settings:

msh> autonet

Configuration

You can configure AutoNet settings.

msh> autonet {on|off}

• {on} means "active" and {off} means "inactive".

Current interface priority configuration display

msh> autonet priority

Interface priority configuration

msh> autonet priority "interface_name"

- You can give interface's AutoNet parameter priority.
- Priority settings are available when multiple interfaces are installed.

Interface	Interface configured
ether	Ethernet interface



- If an interface is not selected, the current interface connection settings remain in effect.
- For details about AutoNet, refer to autonet parameters.

devicename

Use the "devicename" command to display and change the machine name.

View settings

msh> devicename

Machine name configuration

msh> devicename name "character string"

- Enter a machine name using up to 31 alphanumeric characters.
- Set single names for each machine.

Machine name initialization

msh> devicename clear name

• Reset the machine name to its default.

dhcp

Use the "dhcp" command to configure DHCP settings.

View settings

The following command displays the current DHCP settings.

msh> dhcp

Configuration

You can configure DHCP.

msh> dhcp "interface_name" {on|off}

- Click {on} to enable dhcp. Click {off} to disable DHCP.
- If the DNS server address and domain name are obtained from DHCP, be sure to click {on}.

Interface name	Interface configured
ether	Ethernet interface

Current interface priority configuration display

msh> dhcp priority

Interface priority configuration

msh> dhcp priority "interface_name"

- You can select which interface has DHCP parameter priority.
- Priority settings are available when multiple interfaces are installed.

DNS server address selection

msh> dhcp dnsaddr {dhcp|static}

- Specify whether to obtain the DNS server address from the DHCP server or use the address set by a user.
- To obtain the DNS server address from the DHCP server, specify "dhcp". To use the address set by a user, specify "static".

Domain name selection

msh> dhcp "interface_name" domainname {dhcp|static}

- Specify whether to obtain the domain name from the DHCP server or use the domain name set by a user.
- To obtain the domain name from the DHCP server, specify "dhcp". To use the domain name set by a user, specify "static".

Reference

• p.67 "Using DHCP"

dhcp6

Use the "dhcp6" command to display or configure DHCPv6 settings.

View settings

The following command displays the current DHCPv6 settings.

msh> dhcp6

DHCPv6-lite configuration and display

msh> dhcp6 "interface_name" lite {on|off}

Viewing and specifying DNS server address selection (obtained from the DHCPv6 server/user specified value)

msh> dhcp6 dnsaddr {dhcp|static}

DUID(DHCP unique ID) deletion and display

msh> dhcp6 duid clear

Viewing and specifying the time required to re-obtain the parameter obtained from DHCPv6

msh> dhcp6 option lifetime [0-65535]

- It can be entered between 0 and 65535 minutes.
- The default is 60 minutes.
- If you specify "O", you cannot re-obtain the value.

dns

Use the "dns" command to configure or display DNS (Domain Name System) settings.

View settings

The following command displays current DNS settings:

msh> dns

IPv4 DNS server configuration

The following command enables or disables the IPv4 DNS server address:

msh> dns "ID" server "server address"

The following command displays a configuration using the IP address 192.168.15.16 on a DNS 1 server:

msh> dns 1 server 192.168.15.16

- You can register IPv4 DNS Server address.
- You can select an ID number between 1 and 3. You can select up to 3 ID.
- You cannot use "255.255.255.255" as the DNS server address.

IPv6 DNS server configuration

The following command enables or disables the IPv6 DNS server address:

msh> dns "ID" server6 "server address"

- You can register IPv6 DNS Server address.
- The selectable ID number is between 1 and 3. You can select up to 3 ID.

Dynamic DNS function setting

msh> dns "interface_name" ddns {on|off}

- You can set the dynamic DNS function "active" or "inactive".
- {on} means "active" and {off} means "inactive".

Interface name	Interface configured
ether	Ethernet interface

Specifying the record overlap operation

msh> dns overlap {update|add}

- You can specify operations performed when records overlap.
- update: To delete old records and register new records.
- add: To add new records and store the old records.
- When CNAME overlaps, it is always changed, irrespective of settings.

CNAME registration

msh> dns cname {on|off}

- You can specify whether to register CNAME.
- {on} means "active" and {off} means "inactive".
- The CNAME registered is the default name beginning with rnp. CNAME cannot be changed.

A records registration

msh> dns arecord {dhcp|own}

- dhcp: You can specify the method of registering an A record when the dynamic DNS function is enabled and DHCP is used.
- own: To register an A record using the printer as the DNS client.

The DNS server address and the domain name already designated are used for the registration.

Record updating interval settings

msh> dns interval [1-255]

- You can specify the interval after which records are updated when using the dynamic DNS function.
- The updating interval is specified hourly. It can be entered between 1 and 255 hours.
- The default is 24 hours.

resolv.conf display

msh> dns resolv

Specifying the protocol when asking names during dual stacking

msh> dns resolv protocol {ipv4|ipv6}

Appears during dual stacking only.

domainname

Use the "domainname" command to display or configure the domain name settings.

You can configure the Ethernet interface.

View settings

The following command displays the current domain name:

msh> domainname

Interface domain configuration

msh> domainname "interface_name"

Setting the Domain Name

msh> domainname "interface_name" name "domain name"

• A domain name can be entered using up to 63 alphanumeric characters.

Interface	Interface set
ether	Ethernet interface

Deleting the Domain Name

msh> domainname "interface_name" clear name

help

Use the "help" command to display the available command list and the procedures for using those commands.

Command list display

msh> help

Display of procedure for using commands

msh> help "command_name"

hostname

Use the "hostname" command to change the host name.

View settings

msh> hostname

IPv4 Configuration

msh> hostname "interface_name" name "character string"

- Enter the host name using up to 63 alphanumeric characters.
- You cannot use a host name beginning "RNP" (in either upper or lower case).
- If you did not enter an interface name, it is automatically set to the Ethernet interface.

Interface name	Interface configured
ether	Ethernet interface

Initializing the host name for each interface

msh>hostname "interface_name" clear name

ifconfig

Use the "ifconfig" command to view and configure TCP/IP (IP address, subnet mask, broadcast address, default gateway address) for the machine.

View settings

msh> ifconfig

IPv4 configuration

msh> ifconfig "interface_name" "address"

If you did not enter an interface name, it is automatically set to the Ethernet interface.

Interface name	Interface configured
ether	Ethernet Interface

The following explains how to configure an IPv4 address 192.168.15.16 on Ethernet interface.

msh> ifconfig ether 192.168.15.16

IPv6 configuration

msh> ifconfig "interface_name" inet6 "address" "prefixlen[1-128]"

The following explains how to configure a IPv6 address to 2001:DB8::100 with prefix length 64 on the Ethernet interface.

msh> ifconfig ether inet6 2001:DB8::100 64

Netmask configuration

msh> ifconfig "interface_name" netmask "address"

The following explains how to configure a subnet mask 255.255.255.0 on Ethernet interface.

msh> ifconfig ether netmask 255.255.255.0

Broadcast address configuration

msh> ifconfig "interface_name" broadcast "address"

Changing the interface

msh> ifconfig "interface" up



- To get the above addresses, contact your network administrator.
- Use the default configuration if you cannot obtain setting addresses.
- The IP address, subnet mask and broadcast address are the same as that for the ethernet interface.
- TCP/IP configuration is the same for both Ethernet interface. If interfaces are changed, the new interface inherits the configuration.
- Use "Ox" as the initial two letters of a hexadecimal address.

ipsec

Use the "ipsec" command to view and configure IPsec settings.

Viewing settings

The following command displays the current IPsec settings:

msh> ipsec



• For details about displayed contents, consult your administrator.

ipv6

Use the "ipv6" command to display and configure IPv6 settings.

View Setting

msh> ipv6

IPv6 stateless address

msh> ipv6 stateless {on|off}

If "on" is selected, IPv6 requests information required for maintaining stateful connection to the router for as long as the machine power is turned on. This setting allows information from the router to be obtained constantly, and periodically refreshes the effective period of the stateless address.

logout

Use the "logout" command to close telnet.

Closing telnet

msh> logout

A confirmation message appears.

{yes|no|return}

Enter [yes], [no], or [return] as required, and then press the [Enter] key.

To save the changes and then close telnet, enter [yes].

To close telnet without saving any changes, enter [no].

To continue making changes, enter [return].

netware

Use the "netware" command to view and configure the NetWare settings such as the file server name.

NetWare File Server Names

msh> netware fname "character string"

1

• Enter the NetWare file server name using up to 47 characters.

Encap type

msh> netware encap {802.3|802.2|snap|ethernet2|auto}

SAP interval

msh> netware "sap_interval[0-3600]"

It can be entered between 0 and 3600 seconds.

Setting login mode for file server

msh> netware login server

Setting login mode for NDS tree

msh> netware login tree

Setting login mode for NDS tree name

msh> netware tree "NDS tree name"

File transfer protocol

msh> netware trans {ipv4pri|ipxpri|ipv4|ipx}

• If you do not specify the protocol, the current setting is displayed.

Protocol	Set Protocol
ipv4pri	IPv4+IPX(IPv4)
ipxpri	IPv4+IPX(IPX)
ipv4	IPv4
ipx	IPX

passwd

Use the "passwd" command to change the remote maintenance password.

Changing the password

msh> passwd

- Enter the current password.
- Enter the new password.
- Renter the new password to confirm it.

Changing the password of the administrators using the Supervisor

msh> passwd {Administrator ID}

• Enter the new password.

• Renter the new password to confirm it.



- Be sure not to forget or lose the password.
- The password can be entered using up to 32 alphanumeric characters. Passwords are case-sensitive.
 For example, "R" is not the same as "r".

pathmtu

Use the "pathmtu" command to display and configure the PathMTU Discovery service function.

View settings

msh> pathmtu

Configuration

msh> pathmtu {on|off}

- The default is "on".
- If the MTU size of the sent data is larger than the router's MTU, the router will declare it
 impassable, and communication will fail. If this happens, selecting the "pathmtu" to "off" optimizes
 the MTU size and prevents data output failure.
- Depending on the environment, information might not be obtained from the router, and communication will fail. If this happens, select the "pathmtu" to "off".

route

Use the "route" command to view and control the routing table.

Specified route information display

msh> route get "destination"

• Specify the IPv4 address to destination.

"0.0.0.0" cannot be specified as destination address.

Enabling/disabling specified IPv4 destination

msh> route active {host|net} "destination" {on|off}

• If you do not specify {host | net}, the host setting is automatically selected.

Adding IPv4 Routing Table

msh> route add {host|net} "destination" "gateway"

- Adds a host or network route to "destination", and a gateway address to "gateway" in the table.
- Specify the IPv4 address to destination and gateway.
- If you do not specify {host | net}, the host setting is selected automatically.

1

• You cannot specify "0.0.0.0" as the destination address.

Setting the Default IPv4 Gateway

msh> route add default "gateway"

Deleting specified IPv4 destination from Routing Table

msh> route delete {host|net} "destination"

- If you do not specify {host | net}, the host setting is automatically selected.
- IPv4 address of destination can be specified.

Setting IPv6 Default Gateway

msh> route add6 default "gateway"

Adding a specified IPv6 destination to Routing Table

msh> route add6 "destination" "prefixlen[1-128]" "gateway"

- Specify the IPv6 address to destination and gateway.
- If the prefix of the address is between 1 and 127, the network is selected. If the prefix of the address is 128, the host is selected.
- You cannot register a record that has the same destination and prefix as a registered record.

Deleting a specified IPv6 destination from Routing Table

msh> route delete6 "destination" "prefixlen[1-128]"

• Specify the IPv6 address to destination and gateway.

Display information about a specified IPv6 route information

msh> route get6 "destination"

• Specify the IPv6 address to destination and gateway.

Enabling/disabling a specified IPv6 destination

msh> route active6 "destination" "prefixlen[1-128]" {on|off}

Route initialization

msh> route flush



- The maximum number of IPv4 routing tables is 16.
- The maximum number of IPv6 routing tables is 2.
- Set a gateway address when communicating with devices on an external network.
- The same gateway address is shared by all interfaces.
- "Prefixlen" is a number between 1 and 128.

set

Use the "set" command to set the protocol information display "up" or " down".

View settings

The following command displays protocol information (up/down).

```
msh> set ipv4
msh> set ipv6
msh> set ipsec
msh> set netware
msh> set smb
msh> set protocol
```

When protocol is specified, information about TCP/IP, IPsec, NetWare, SMB appears.

```
msh> set ftp
msh> set ftp6
msh> set rsh
msh> set rsh6
msh> set web
msh> set snmp
msh> set ssl
msh> set ss16
msh> set nrs
msh> set rfu
msh> set rfu6
msh> set http
msh> set http6
msh> set nbt
msh> set ssdp
msh> set ssh
msh> set sftp
```

Configuration

msh> set sftp6

• Enter "up" to enable protocol, and enter "down" to disable protocol.

You can set the protocol to "active" or "inactive".

1

```
msh> set ipv4 {up|down}
```

- If you disable IPv4, you cannot use remote access after logging out. If you did this by mistake, you can use the control panel to enable remote access via IPv4.
- Disabling IPv4 also disables ftp, rsh, web, snmp, ssl, http, and sftp.

```
msh> set ipv6 {up|down}
```

- If you disable IPv6, you cannot use remote access after logging out. If you did this by mistake, you can use the control panel to enable remote access via IPv6.
- Disabling IPv6 also disables ftp6, rsh6, ssl6, http6, and sftp6.

```
msh> set ipsec {up|down}
msh> set netware {up|down}
msh> set smb {up|down}
msh> set ftp {up|down}
msh> set ftp6 {up|down}
msh> set rsh {up|down}
msh> set rsh6 {up|down}
msh> set rsh6 {up|down}
msh> set set sup|down}
msh> set set sinmp {up|down}
msh> set sinmp {up|down}
```

 If Secured Sockets Layer (SSL, an encryption protocol) function is not available for the machine, you cannot use the function by enabling it.

```
msh> set nrs {up|down}
msh> set rfu {up|down}
msh> set rfu6 {up|down}
msh> set http {up|down}
msh> set http6 {up|down}
msh> set ssh {up|down}
msh> set ssh {up|down}
msh> set sftp {up|down}
msh> set sftp {up|down}
msh> set sftp {up|down}
msh> set sftp6 {up|down}
```

show

Use the "show" command to display network interface board configuration settings.

View settings

msh> show

• If "-p" is added, you can view settings one by one.

smb

Use the "smb" command to configure or delete the computer or workgroup name for SMB.

Computer name settings

msh> smb comp "computer name"

- Set computer name using up to 15 characters.
- Names beginning with "RNP" or "rnp" cannot be entered.

Working group name settings

msh> smb group "work group name"

• Set workgroup name using up to 15 characters.

Comment settings

msh> smb comment "comment"

Set comment using up to 31 characters.

Deleting computer name

msh> smb clear comp

Deleting group name

msh> smb clear group

Deleting comment

msh> smb clear comment

View protocol

msh> smb protocol

snmp

Use the "snmp" command to display and edit SNMP configuration settings such as the community name.

View settings

msh> snmp

• Default access settings 1 is as follows:

Community name:public

IPv4 address:0.0.0.0

IPv6 address:::

IPX address:00000000:000000000000

Access type:read only

Effective Protocol: IPv4/IPv6/IPX

• Default access settings 2 is as follows:

Community name:admin

IPv4 address:0.0.0.0

IPv6 address:::

IPX address:00000000:000000000000

Access type:read/write

Effective Protocol: IPv4/IPv6/IPX

- If "-p" is added, you can view settings one by one.
- To display the current community, specify its registration number.

Display

msh> snmp ?

Community name configuration

msh> snmp "number" name "community_name"

- You can configure ten SNMP access settings numbered 1-10.
- The community name can be entered using up to 15 characters.

Deleting community name

msh> snmp "number" clear name

Access type configuration

msh> snmp "number" type "access_type"

Access type	Type of access permission
no	not accessible
read	read only
write	read and write
trap	user is notified of trapmessages

Protocol configuration

Use the following command to set protocols "active" or "inactive": If you set a protocol "inactive", all access settings for that protocol are disabled.

msh> snmp {ipv4|ipv6|ipx} {on|off}

- Specify "ipv4" for IPv4, "ipv6" for IPv6, or "ipx" for IPX/SPX.
- {on} means "active" and {off} means "inactive".
- All protocols cannot be turned off concurrently.

Configuration of protocol for each registration number

```
msh> snmp "number" active {ipv4|ipv6|ipx} {on|off}
```

 To change the protocol of access settings, use the following command. However, if you have disabled a protocol with the above command, activating it here has no effect.

Access configuration

msh> snmp "number" {ipv4|ipv6|ipx} "address"

- You can configure a host address according to the protocol used.
- The network interface board accepts requests only from hosts that have IPv4, IPv6, and IPX
 addresses with access types of "read-only" or "read-write". Enter "0" to have network interface
 board accept requests from any host without requiring a specific type of access.
- Enter a host address to deliver "trap" access type information to.
- To specify IPv4 or IPv6, enter "ipv4" or "ipv6" followed by a space, and then the IPv4 or IPv6
 address.
- To specify IPX/SPX, enter "ipx" followed by a space, the IPX address followed by a decimal, and then the MAC address of the network interface board.

sysLocation configuration

msh> snmp location

Deleting sysLocation

msh> snmp clear location

sysContact setting

msh> snmp contact

Deleting sysContact

msh> snmp clear contact

SNMP v1v2 function configuration

msh> snmp v1v2 {on|off}

• Specify "on" to enable, and "off" to disable.

SNMP v3 function configuration

msh> snmp v3 {on|off}

• Specify "on" to enable, and "off" to disable.

SNMP TRAP configuration

 $msh > snmp trap{v1|v2|v3} {on|off}$

• Specify "on" to enable, and "off" to disable.

Remote Configuration Authorization configuration

msh> snmp remote {on|off}

• Specify "on" to enable, and "off" to disable the SNMP v1v2 setting.

SNMP v3 TRAP configuration display

```
msh> snmp v3trap
msh> snmp v3trap [1-5]
```

• If a number from 1 to 5 is entered, settings are displayed for that number only.

Configuring a sending address for SNMP v3 TRAP

msh> snmp v3trap [1-5] {ipv4|ipv6|ipx} "address"

Configuring a sending protocol for SNMP v3 TRAP

msh> snmp v3trap [1-5] active {ipv4|ipv6|ipx} {on|off}

Configuring a user account for SNMP v3 TRAP

msh> snmp v3trap [1-5] account "account_name"

• Enter an account name using up to 32 alphanumeric characters.

Deleting an SNMP v3 TRAP user account

msh> snmp v3trap [1-5] clear account

Configuring an SNMP v3 encryption algorithm

msh> snmp v3auth {md5|sha1}

Configuring SNMP v3 encryption

msh> snmp v3priv {auto|on}

- Set "auto" for automatic encryption configuration.
- If you select "on", plain-text communication becomes impossible only encrypted communication is possible.



• "Encrypted communication" means an encrypted password is set on the machine.

sntp

The machine clock can be synchronized with a NTP server clock using Simple Network Time Protocol (SNTP). Use the "sntp" command to change SNTP settings.

View settings

msh> sntp

NTP IPv4 server address configuration

You can specify the IPv4 address of the NTP server.

msh> sntp server "IPv4_address"

Deleting NTP server configuration

msh> sntp server clear

Interval configuration

msh> sntp interval "polling_time"

- You can specify the interval at which the machine synchronizes with the operator-specified NTP server. The default is 60 minutes.
- The interval can be entered from 0, or between 15 and 10,080 minutes.
- If you set 0, the machine synchronizes with the NTP server only when you turn the machine on. After that, the machine does not synchronize with the NTP server.

Time-zone configuration

msh> sntp timezone "±hour_time"

You can specify the time difference between the machine clock and NTP server clock. The values
are between -12:00 and +13:00.



• You can only select either the address or host name for the ntp server.

ssdp

Use the "ssdp" command to view and configure SSDP settings.

View settings

msh> ssdp

Setting effective time

msh> ssdp profile [1801-86400]

The default is 10800 seconds.

Advertise packet TTL settings

msh> ssdp ttl [1-255]

The default is 4.

ssh

Use the "ssh" command to view and configure SSH settings.

View settings

msh> ssh

Data compression communication settings

msh> ssh compression {on|off}

The default is "on".

SSH/SFTP communication port setting

msh> ssh port [22, 1024-65535]

The default is 22.

SSH/SFTP communication timeout setting

msh> ssh timeout [0-65535]

The default is 300.

SSH/SFTP communication login timeout setting

msh> ssh logintimeout [0-65535]

The default is 300.

Setting an open key for SSH/SFTP

msh> ssh genkey {512|768|1024} "character string"

Create an open key for SSH/SFTP communication.

Usable characters are ASCII 0x20-0x7e (32 bytes) other than "0".

The default key length is 1024, and the character string is blank.

If you do not specify this parameter, an open key with the default value will be created.

Deleting open key for ssh/sftp communication

msh> ssh delkey



• If you do not specify a character string, current setting is displayed.

syslog

Use the "syslog" command to display the information stored in the machine's system log.

View message

msh> syslog

1

upnp

Use the "upnp" command to display and configure the universal plug and play.

Public URL display

```
msh> upnp url
```

Public URL configuration

```
msh> upnp url "character string"
```

• Enter the URL string in the character string.

web

Use the "web" command to display and configure parameters on Web Image Monitor.

View Settings

msh> web

URL Configuration

You can set URLs linked by clicking URL on Web Image Monitor.

```
msh> web "ID" url http:// "The URL or IP address you want to register"/
```

Specify "1" or "2" for ID as the number corresponding to the URL. Up to two URLs can be registered and specified.

Resetting URLs registered as link destinations

```
msh> web "ID" clear url
```

Specify "1" or "2" for ID as the corresponding number to the URL.

Link name configuration

You can enter the name for URL that appears on Web Image Monitor.

```
msh> web "ID" name "Name you want to display"
```

Specify "1" or "2" for ID the corresponding number to the link name.

Resetting URL names registered as link destinations

```
msh> web "ID" clear name
```

Specify "1" or "2" for ID as the number corresponding to the link name.

Help URL Configuration

You can set URLs linked by clicking "?" on Web Image Monitor.

msh> web help http://"Help URL or IP address"/help/

Resetting Help URL

msh> web clear help

wins

Use the "wins" command to configure WINS server settings.

Viewing settings

msh> wins

If the IPv4 address obtained from DHCP differs from the WINS IPv4 address, the DHCP address
is the valid address.

Configuration

msh> wins "interface_name" {on|off}

- {on} means "active" and {off} means "inactive".
- Be sure to specify the interface.

Interface name	Interface configured
ether	Ethernet interface

Address configuration

Use the following command to configure a WINS server IPv4 address:

wins "interface name" {primary|secondary} "IPv4 address"

- Use the "primary" command to configure a primary WINS server IPv4 address.
- Use the "secondary" command to configure a secondary WINS server IPv4 address.
- Do not use "255.255.255.255" as the IP address.

NBT (NetBIOS over TCP/IP) Scope ID Selection

You can specify the NBT scope ID.

msh> wins "interface_name" scope "scope ID"

- The scope ID can be entered using up to 31 alphanumeric characters.
- Be sure to specify the interface.

Interface name	Interface configured
ether	Ethernet interface

1

Understanding the Displayed Information

This section explains how to read status information returned by the network interface board.

Configuring the Network Interface Board

Use the following command to display network interface board settings:

• telnet: Use the "show" command.

ltem		Description
Common		
Mode		
Protocol Up/Down		Protocol Settings
IPv4		
IPv6		
IPsec		
NetWare		
SMB		
Ethernet interface		
Syslog priority		
NVRAM version		
Device name		
Comment		
Location		
Contact		
Soft switch		
TCP/IP		TCP/IP settings
Mode(IPv4)		

П

	Item	Description
М	ode(IPv6)	
	ftp	
	rsh	
	web	
	http	
	ftpc	
	snmp	
	autonet	
	ssl	
	nrs	
	rfu	
	nbt	
	ssdp	
	ssh	
	sftp	
IP	v4	
	DHCP	
	Address	
	Netmask	
	Broadcast	
	Gateway	
IP	v6	
	Stateless	
	Manual	
	Gateway	

ltem		Description
	DHCPv6-lite	
	DUID	
	DHCPv6 option lifetime	
IPs	sec	
	Manual Mode	
	Excluded Protocol	
	https	
	dns	
	dhcp	
	wins	
En	сарТуре	
Нс	ost name	
DN	NS Domain	
Ac	ccess Control	Access Control settings
	IPv4	
	AccessEntry [X]	X can be set between 1 and 5.
	IPv6	
	AccessEntry [X]	X can be set between 1 and 5.
Tin	ne server	Time settings
Tin	ne Zone	
Tin	ne server polling time	
SY	SLOG server	Websys settings
Нс	ome page URL1	
Нс	ome page link name 1	
Нс	ome page URL2	

	ltem	Description
	Home page link name2	
	Help page URL	
Ne	etWare	NetWare settings
	ЕпсарТуре	
	File server name	
	Switch	
	Login Mode	
	SAP interval time	
	NDS Tree Name	
	Transfer Protocol	
SM	ИВ	SMB settings
	Switch	
	Mode	
	Direct print	
	Notification	
	Workgroup name	
	Computer name	
	Comment	
	Share name[1]	
	Protocol	
DN	18	DNS settings
	IPv4	
	Server [X]	X can be set between 1 and 3.
	Selected IPv4 DNS Server	
	IPv6	
IPv6		

ltem		ltem	Description
		Server [X]	X can be set between 1 and 3.
		Selected IPv6 DNS Server	
	Res	solver Protocol	
Domain name		n name	
	ether		
DD	NS		
	eth	er	
WI	WINS		WINS settings
	eth	er	
		Primary WINS	
		Secondary WINS	
SS	DP		SSDP settings
	UUID		
	Profile		
	TTL		
UP	UPnP		UPnP settings
	URL		
SN	IMP		SNMP settings
	SN	MPv1v2	
	SN	MPv3	
	pro	otocol	
	v1	Ггар	
	v2	Ггар	
	v3 ⁻	Ггар	
	SN	MPv1v2 Remote Setting	

	ltem	Description	
	SNMPv3 Privacy		
ssh		ssh settings	
	Compression		
	Port		
	TimeOut		
	LoginTimeOut		
Certificate			
	Verification		
Sh	ell mode	Remote maintenance tool mode	

Message List

This is a list of messages that appear in the machine's system log. The system log can be viewed using the "syslog" command.

System Log Information

Use the following command to display the system log information:

- UNIX: Use the "syslog" command and "rsh", "rcp", "ftp", and "sftp" parameters.
- telnet: Use the "syslog" command.

Message	Problem and solutions
account is unavailable: same account name be used.	User account is disabled. This could be because it use the same account name as the administrator account.
account is unavailable: The authentication password is not set up.	User account is disabled. This could be because the authentication password is not set, and only the encryption account is set.
account is unavailable: encryption is impossible.	Encryption is not possible and account is disabled. This could be because: • Security option is not installed. • Encryption password has not been specified.
add_sess_IPv4: bad trap addr: <ipv4 address="">, community: <community name=""></community></ipv4>	The IPv4 address (0.0.0.0.) is unavailable when the community access type is TRAP. Specify the host IPv4 address for the TRAP destination.
add_sess_IPv6: bad trap addr: <ipv6 address="">, community: <community name=""></community></ipv6>	The IPv6 address [::] is unavailable when the community access type is TRAP. Specify the host IPv6 address for the TRAP destination.
add_sess_IPv4: community <community name=""> already defined.</community>	The same community name already exists. Use another community name.
add_sess_IPv6: community <community name=""> already defined.</community>	The same community name already exists. Use another community name.

Message	Problem and solutions	
add_sess_IPX: bad trap addr: <ipx address="">, community: <community name=""></community></ipx>	The IPX address (00:00:00:00:00) is unavailable when the community access type is TRAP. Specify the host IPX address for the TRAP destination.	
add_sess_IPX: community <community name=""> already defined.</community>	The same community name already exists. Use another community name.	
Attach FileServer= <file server=""></file>	Connection to the file server as the nearest server has been established.	
connected DHCP server <dhcp address="" server=""></dhcp>	The IP address was successfully received from the DHCP server.	
Connected DHCPv6 server <ipv6 address=""></ipv6>	The IP address was successfully received from the DHCPv6 server.	
connection from <ip address=""></ip>	A user logged in from the host <ip address="">.</ip>	
Current Interface Speed: xxxMbps	Speed of the network (10 Mbps, or 100 Mbps).	
Current IP address <current address="" ip=""></current>	The IP address <current address="" ip=""> was acquired from the DHCP server.</current>	
Current IPX address <ipx address=""></ipx>	The current IP address is <ipx address="">.</ipx>	
DHCP server not found.	The DHCP server was not found. Make sure that the DHCP is on the network.	
DHCPv6 server not found.	The DHCPv6 server was not found. Make sure that the DHCPv6 is on the network.	
DHCP lease time expired.	The DHCP lease time has expired. Perform the DHCP discover again. The IP address you have been using is no longer available.	
Duplicate IP = <ip address=""> (from <mac address="">).</mac></ip>	The same IP address (IPv4, or IPv6 address) was used. Each IP address (IPv4, or IPv6 address) must be unique. Check the address of the device indicated in [MAC address].	
Frametype= <frametype name=""></frametype>	The specified frame type name <frame name="" type=""/> is for NetWare use.	

Message	Problem and solutions
(IKE phase-1) mismatched authentication type: local= <authentication 1="" type=""> remote=<authentication 2="" type=""></authentication></authentication>	This machine's <authentication 1="" type=""> in IKE phase 1 does not match the communicating host's <authentication 2="" type="">, Make sure this machine's ISAKMP SA authentication type matches that of the communicating host.</authentication></authentication>
(IKE phase-1) mismatched DH group: local= <dh 1="" group="" number=""> remote=<dh 2="" group="" number=""></dh></dh>	This machine's ISAKMP SA Oakley group <dh 1="" group="" number=""> in IKE phase 1 does not match the communicating host's ISAKMP SA Oakley group <dh 2="" group="" number="">, Make sure this machine's ISAKMP SA Oakley group matches that of the communicating host.</dh></dh>
(IKE phase-1) mismatched encryption type: <encryption 1="" algorithm=""> remote=<encryption algorithm 2></encryption </encryption>	This machine's ISAKMP SA Oakley group <encryption 1="" algorithm=""> in IKE phase 1 does not match the communicating host's ISAKMP SA Oakley group < encryption algorithm 2>, Make sure this machine's ISAKMP SA Oakley group matches that of the communicating host.</encryption>
(IKE phase-1) mismatched hash type: local= <hash Algorithm 1> remote=<hash 2="" algorithm=""></hash></hash 	This machine's ISAKMP SA <hash 1="" algorithm=""> in IKE phase 1 does not match the communicating host's ISAKMP SA <hash 2="" algorithm="">, Make sure this machine's ISAKMP SA Hash Algorithm matches that of the communicating host.</hash></hash>
inetd start.	The inetd service has started.
Interface (interface name): Duplicate IP Address (<ip address="">).</ip>	The same IP (IPv4 or IPv6) address was used. Each IP address must be unique. Check the address of the device indicated in [IP address].
< Interface > started with IP: < IP address >	IP address (IPv4 or IPv6 address) has been set for the interface and is operating.
<interface>: Subnet overlap.</interface>	The same IP address (IPv4, or IPv6 address) and the subnet mask is used with other device.
LeaseTime= <lease time="">(sec), RenewTime=<renew time="">(sec).</renew></lease>	The resource lease time received from the DHCP server is displayed in [lease time] in seconds. The renewal time is displayed in [renew time] in seconds.

Message	Problem and solutions	
Name registration failed. name= <netbios name=""></netbios>	Name registration of <netbios name=""> failed. Change to a different NetBIOS name.</netbios>	
Name registration success in Broadcast name= <netbios name=""></netbios>	Name registration by <netbios name=""> broadcast was successful.</netbios>	
Name registration success. WINS Server= <wins address="" server=""> NetBIOS Name=<netbios name=""></netbios></wins>	Name registration of <netbios name=""> to <wins address="" server=""> was successful.</wins></netbios>	
nwstart start. (NetWare)	The NetWare protocol stack setup server has started.	
print sessions full	No more print jobs can be accepted. Wait a while before sending any more print jobs.	
Required file server (<file name="" server="">) not found</file>	The required file server <file name="" server=""> could not be found.</file>	
sap enable. saptype= <sap type="">, sapname=<sap name=""></sap></sap>	The SAP function was started. The SAP packet is issued to advertise the service in the SAP table on the NetWare server.	
session IPv4 <community name=""> not defined.</community>	The requested community name is not defined.	
session IPv6 <community name=""> not defined.</community>	The requested community name is not defined.	
session_IPX <community name=""> not defined.</community>	The requested community name is not defined.	
shutdown signal received. network service rebooting	The smbd service has started.	
Smbd start. (NetBIOS)	SMBD (Server Message Block Daemon) has been started.	

Message	Problem and solutions	
SMTPC: failed to get smtp server ip-address.	The SMTP server IP address could not be obtained. This could be because:	
	The specified DNS server could not be found.	
	No connection to the network has been established.	
	The specified DNS server could not be found.	
	An incorrect DNS server is specified.	
	The specified SMTP server IP address could not be found in the DNS server.	
SMTPC: failed to connect smtp server. timeout.	Connection to the SMTP server failed due to timeout. This could be because the specified SMTP server name is incorrect, or no connection to the network has been established, or the network configuration is incorrect, so there is no response from the SMTP server. Check the SMTP server name, or the network connection and configuration.	
SMTPC: refused connect by smtp server.	Connection to the SMTP server is denied. This could be because server other than the SMTP server has been specified, or the specified SMTP server port number is incorrect. Check the SMTP server name, port number, or the SMTP server port number.	
SMTPC: no smtp server. connection close.	Connection to the SMTP server failed due to no response from SMTP. This could be because a server other than the SMTP server has been specified, or the specified SMTP server port number is incorrect. Check the SMTP server name, port number, or the SMTP server port number.	

Message	Problem and solutions
SMTPC: failed to connect smtp server.	Connection to the SMTP server failed. This could be because no connection to the network has been established, or the network configuration is incorrect, so there is no response from the SMTP server, or the specified SMTP server name is incorrect, or the specified SMTP server IP address could not be found in the DNS server, or a server other than the SMTP server has been specified, or the specified SMTP server port number is incorrect. Check the DNS Server's IP address and SMTP server's IP address, or the SMTP server name and SMTP port number, or the SMTP server's SMTP port number, or the network connection and configuration.
SMTPC: username or password wasn't correct. [response code] (information)	Connection to the SMTP server failed, because the specified SMTP user name is incorrect, or the specified SMTP password is incorrect. Check the SMTP user name and password.
Snmp over IPv4 is ready	Communication over IPv4 with snmp is available.
Snmp over IPv6 is ready.	Communication over IPv6 with snmp is available.
Snmp over IPX is ready.	Communication over IPX with snmp is available.
Snmpd Start.	The snmpd service has started.
terminated.	The IKE service has stopped because no configurations for manual SA or IKE exist.
There is problem in dhcp server operation.	There is a problem with the DHCP server. If multiple DHCP servers are active on the network, check that they are assigning unique IP addresses to each machine.
trap account is unavailable.	v3Trap cannot be sent. This could be because the Trap destination account is different from the account specified by the machine.
Updated (option name)(value) via DHCPv6 Server	The parameter obtained from the DHCP server has been updated.

-	

Message	Problem and solutions
WINS name registration: No response to server (WINS server address)	There was no response from the WINS server. Check that the correct WINS server address is entered. Also, check that the WINS server is functioning properly.
WINS wrong scope ID= <scope id=""></scope>	The scope ID is invalid. Use a valid scope ID.

ī

2. Appendix

Using DHCP

You can use the machine in a DHCP environment. You can also register the machine NetBIOS name on a WINS server when it is running.

- Supported DHCP servers are Microsoft DHCP Server included with Windows 2000 Server, and Windows Server 2003/2003 R2/2008/2008 R2, and the DHCP server included with NetWare and UNIX.
- If you do not use the WINS server, reserve the machine's IP address in the DHCP server so the same IP address is assigned every time.
- To use the WINS server, change the WINS server setting to "active" using the control panel.
- DHCP relay-agent is not supported. If you use DHCP relay-agent on a network via ISDN, it will result
 in increased line charges. This is because your computer connects to the ISDN line whenever a packet
 is transferred from the machine.
- If there is more than one DHCP server, use the same setting for all servers. The machine operates using data from the DHCP server that responds first.
- DHCP servers can operate in an IPv6 environment, but they cannot be configured to allocate IPv6 addresses or obtain host names.

Using AutoNet

If the machine IPv4 address is not automatically assigned by the DHCP server, a temporary IP address starting with 169.254 and not used on the network can be automatically selected by the machine.



- The IP address assigned by the DHCP server is given priority over that selected by AutoNet.
- You can confirm the current IPv4 address on the configuration page. For more information about the configuration page, see General Settings Guide.
- When AutoNet is running, the NetBIOS name is not registered on the WINS server.
- The machine cannot communicate with devices that do not have the AutoNet function. However, this
 machine can communicate with Macintosh computers running Mac OS X 10.2.3. or higher.

Configuring the WINS Server

The machine can be configured to register its NetBIOS name with a WINS server when the power is turned on.

This section explains configuring the WINS server.



- The WINS server is supported with Windows 2000 Servers WINS Manager.
- For details about the WINS server settings, see Windows Help.
- If there is no reply from the WINS server, the NetBIOS name is registered by broadcast.
- The NetBIOS name can be entered using up to 15 alphanumeric characters.

Using Web Image Monitor

- 1. Start a Web browser.
- 2. Enter "http://(machine's IP address or host name)/" in the address bar to access the machine whose settings you want to change.

Top Page of Web Image Monitor appears.

3. Click [Login].

The dialog box for entering the user name and password appears.

4. Enter the user name and password, and then click [Login].

Contact your administrator for information about the settings.

Depending on the configuration of your Web browser, the login user name and password might be saved. If you do not want to save them, configure your Web browser's settings so that this information is not saved.

- 5. Click [Configuration] in the menu area, and then click [IPv4] on the [Network] area.
- Check that "Active" is selected for WINS in the [Ethernet] column, and then enter the WINS server IPv4 address in [Primary WINS Server] and [Secondary WINS Server].
- 7. Click [OK].
- 8. Quit Web Image Monitor.

Using telnet

You can also use telnet to configure WINS.



• For details, see "Remote Maintenance by telnet".



• p.30 "Remote Maintenance by telnet"

Using the Dynamic DNS Function

Dynamic DNS is a function which dynamically updates (registers and deletes) records (A record, AAAA record, CNAME, and PTR record) managed by the DNS server. When a DNS server is part of the network environment to which this machine, a DNS client, is connected, records can be dynamically updated using this function.

Updating

Updating procedure varies depending on whether the machine IP address is static or acquired by DHCP.



• Dynamic update using message authentication (TSIG, SIG(0)) is not supported.

For a static IPv4 setting

If the IP address or host name is changed, the A and PTR records are updated. If the A record is registered, CNAME is also registered. CNAMEs that can be registered are as follows:

Ethernet

RNPXXXXXX (XXXXXX represents the last 3 hexadecimal bytes of the MAC address)

However, if CNAME (PRNXXXXXX) overlaps with the host name, CNAME will not be registered.

For DHCPv4 settings

As a substitute for the machine, the DHCP server updates the record, and one of the following occurs:

- When the machine acquires the IP address from the DHCP server, the DHCP server updates the A and PTR records.
- When the machine acquires the IP address from the DHCP server, the machine updates the A
 record, and the DHCP server updates the PTR record.

If the A record is registered, CNAME is also registered. CNAMEs that can be registered are as follows:

Ethernet

RNPXXXXXX (XXXXXX represents the last 3 hexadecimal bytes of the MAC address)

For IPv6 settings

This machine updates the AAAA record and PTR record.

It also updates CNAME when the AAAA record is updated.

When a stateless address is newly set, it is automatically registered on the DNS server also.



- When the dynamic DNS function is not used, records managed by the DNS server must be updated manually, if the machine's IP address is changed.
- To update the record using the machine, the DNS server has to have one of the following:

- No security settings made.
- If security settings are made, an IP-specified client (this machine) permits updating.

DNS servers targeted for operation

For static IP setting

- Microsoft DNS servers with standard Windows 2000 Server/Windows Server 2003/2003 R2/2008/2008 R2 features
- BIND 8.2.3 or higher

For DHCP setup, when the machine updates the A record

- Microsoft DNS servers with standard Windows 2000 Server/Windows Server 2003/2003 R2/2008/2008 R2 features
- BIND 8.2.3 or higher

For DHCP setup, when the DHCP server updates records

- Microsoft DNS servers with standard Windows 2000 Server/Windows Server 2003/2003 R2/2008/2008 R2 features
- BIND 8.2.3 or higher

For IPv6 setting

- Microsoft DNS servers with standard Windows Server 2003/2003 R2/2008/2008 R2 features
- BIND 9.2.3 or higher

DHCPv4 servers targeted for operation

As a substitute for the machine, DHCPv4 servers capable of updating the A record and PTR record are as follows:

- Microsoft DHCP servers with standard Windows 2000 Server (Service Pack 3 or higher versions)/ Windows Server 2003/2003 R2/2008/2008 R2 features
- ISC DHCP 3.0 or higher
- DHCP server with standard NetWare 5 features

Setting the dynamic DNS function

Make settings with telnet using the "dns" command.

• For details, see "Remote Maintenance by telnet".

■ Reference

• p.30 "Remote Maintenance by telnet"

9

9

Setting Up the Machine on a Network

This section describes the network settings you can change with User Tools (System Settings). Make settings according to functions you want to use and the interface to be connected.



• These settings should be made by the administrator, or after consulting with the administrator.

System Settings

Interface Settings

Menu	Description
Machine IPv4 Address	Specify the machine's IPv4 network address.
IPv4 Gateway Address	Specify the gateway address for the router or host computer used as a gateway.
Machine IPv6 Address	Displays the machine's IPv6 network address.
IPv6 Gateway Address	Displays the machine's IPv6 gateway address.
IPv6 Stateless Address Autoconfiguration	Specify IPv6 Stateless Address Autoconfiguration.
DNS Configuration	Make settings for the DNS server.
DDNS Configuration	Specifies the DDNS settings.
IPsec	Specify the machine's IPsec function Active/ Inactive.
Domain Name	Specifies the domain name.
WINS Configuration	Specifies the WINS server settings.
Effective Protocol	Select the protocol to use in the network.
NCP Delivery Protocol	Select the protocol for NCP delivery.
NW Frame Type	Select the frame type when you use NetWare.
SMB Computer Name	Specify the SMB computer name.
SMB Work Group	Specify the SMB work group.

Menu	Description
Ethernet Speed	Set the access speed for networks.
Ping Command	Check the network connection with ping command using given IP address.
Permit SNMPv3 Communication	Set the encrypted communication of SNMP v3.
Permit SSL / TLS Communication	Set the encrypted communication of SSL/TLS.
Host Name	Specify the host name.
Machine Name	Specify the machine name.

File Transfer

Menu	Description
Delivery Option	Enables or disables sending of stored or scanned documents to a delivery server on which the ScanRouter delivery software is installed.
SMTP Server	Specifies the SMTP server name.
SMTP Authentication	Specify SMTP authentication (PLAIN, LOGIN, CRAMMD5, DIGEST-MD5).
POP before SMTP	Specify POP authentication (POP before SMTP).
Reception Protocol	Specify Reception Protocol for receiving e-mail.
POP3 / IMAP4 Settings	Specify the POP3/IMAP4 server name for receiving e-mail.
Administrator's E-mail Address	Specify the Administrator's E-mail Address.
E-mail Communication Port	Specify the port numbers for receiving e-mail. The specified POP3 port number is used for POP before SMTP.
E-mail Reception Interval	Specify, in minutes, the time interval for receiving e-mail via POP3 or IMAP4 server.
Max. Reception E-mail Size	Specify the maximum reception e-mail size for receiving e-mail.

Menu	Description
E-mail Storage in Server	Specify whether or not to store received e-mails on the POP3 or IMAP4 server.
Default User Name / Password (Send)	Specify the user name and password required when sending scan files directly to a shared folder on a computer running Windows, to an FTP server, or to a NetWare server.
Program / Change / Delete E-mail Message	You can program, change, or delete the e-mail message used when sending a scan file as an attachment.
Auto Specify Sender Name	Set whether or not to specify the name of the sender when sending e-mail.
Scanner Resend Interval Time	Specifies the interval the machine waits before resending a scan file, if it cannot be sent to the delivery server or mail server.
Number of Scanner Resends	Sets a maximum number of times a scan file is resent to the delivery server or mail server.

System Settings

E-mail

Interface	Settings		
Ethernet	Interface Settings/Network	Machine IPv4 Address	
		IPv4 Gateway Address	
		DNS Configuration	
		DDNS Configuration	
		Domain Name	
		WINS Configuration	
		Effective Protocol	
		Ethernet Speed	
		Permit SNMPv3 Communication	
		Host Name	
	File Transfer	SMTP Server	
		SMTP Authentication	
		POP before SMTP	
		Reception Protocol	
		POP3 / IMAP4 Settings	
		Administrator's E-mail Address	
		E-mail Communication Port	
		Program / Change / Delete E-mail Message	
		Scanner Resend Interval Time	
		Number of Scanner Resends	

2

Scan to Folder

Interface	Settings		
Ethernet	Interface Settings/Network	Machine IPv4 Address	
		IPv4 Gateway Address	
		DNS Configuration	
		DDNS Configuration	
		Domain Name	
		WINS Configuration	
		Effective Protocol	
		Ethernet Speed	
		Permit SNMPv3 Communication	
		Permit SSL / TLS Communication	
		Host Name	
	File Transfer	Default User Name / Password (Send)	
		Scanner Resend Interval Time	
		Number of Scanner Resends	

Network Delivery Scanner

Interface	Settings		
Ethernet	Interface Settings/Network	Machine IPv4 Address	
		IPv4 Gateway Address	
		DNS Configuration	
		DDNS Configuration	
		Domain Name	
		WINS Configuration	
		Effective Protocol	
		Ethernet Speed	
		Permit SNMPv3 Communication	
		Permit SSL / TLS Communication	
		Host Name	
	File Transfer	Delivery Option	
		Scanner Resend Interval Time	
		Number of Scanner Resends	

2

Network TWAIN Scanner

Interface	Settings		
Ethernet	Interface Settings/Network	Machine IPv4 Address	
		IPv4 Gateway Address	
		DNS Configuration	
		DDNS Configuration	
		Domain Name	
		WINS Configuration	
		Effective Protocol	
		Ethernet Speed	
		Permit SNMPv3 Communication	
		Permit SSL / TLS Communication	
		Host Name	

Document Server

Interface	Settings		
Ethernet	Interface Settings/Network	Machine IPv4 Address	
		IPv4 Gateway Address	
		Machine IPv6 Address	
		IPv6 Gateway Address	
		IPv6 Stateless Address Autoconfiguration	
		DNS Configuration	
		DDNS Configuration	
		Domain Name	
		WINS Configuration	
		Effective Protocol	
		Ethernet Speed	
		Permit SNMPv3 Communication	
		Permit SSL / TLS Communication	
		Host Name	



- For the Effective Protocol setting, check that the protocol you want to use is set to [Active].
- When [POP before SMTP] is set to [On], you must also make settings for [Reception Protocol] and [POP3 / IMAP4 Settings].
- When setting [POP before SMTP] to [On], check POP3 port number in [E-mail Communication Port].
- If [Delivery Option] is set to [On], check that IPv4 Address is specified.

Specifications

Interface	100BASE-TX, 10BASE-T
Frame type	Ethernetll, IEEE 802.2, IEEE 802.3, SNAP
Network Scanner	TCP/IP (IPv4)
	RSH
	FTP
	FTP-C
	SMTP
	SMTP-C
	POP3
	SMB
	NCP
Document Server	TCP/IP (IPv4/IPv6)
	FTP
	FTP-C
	НТТР
	HTTPS
Management Function	TCP/IP (IPv4/IPv6)
	RSH
	RCP
	FTP
	FTP-C
	SNMP
	SNMP-C
	НТТР

	HTTPS
	TELNET (mshell)
	NBT
	DHCP
	DNS-C
	LDAP

Trademarks

Adobe, Acrobat, and Acrobat Reader are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

Firefox is a registered trademark of the Mozilla Foundation in the United States and other countries.

JAWS is a registered trademark of Freedom Scientific BLV Group, LLC, in the United States and other countries.

Macintosh, Mac OS, and Safari are registered trademarks of Apple Inc, registered in the U.S. and other countries.

Microsoft[®], Windows[®], Windows Server[®], and Windows Vista[®] are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

JavaScript is a trademark or registered trademark of Sun Microsystems, Inc. in the United States and other countries.

UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Limited.

UPnPTM is a trademark of the UPnPTM Implementers Corporation.

NetWare, IPX, IPX/SPX, NCP, and NDS are either registered trademarks or trademarks of Novell, Inc.

Other product names used herein are for identification purposes only and might be trademarks of their respective companies. We disclaim any and all rights to those marks.

The proper names of the Windows operating systems are as follows:

• The product names of Windows 2000 are as follows:

Microsoft® Windows® 2000 Professional

Microsoft® Windows® 2000 Server

Microsoft® Windows® 2000 Advanced Server

• The product names of Windows XP are as follows:

Microsoft® Windows® XP Professional

Microsoft® Windows® XP Home Edition

Microsoft® Windows® XP Media Center Edition

Microsoft® Windows® XP Tablet PC Edition

• The product names of Windows Vista are as follows:

Microsoft® Windows Vista® Ultimate

Microsoft® Windows Vista® Business

Microsoft® Windows Vista® Home Premium

Microsoft® Windows Vista® Home Basic

Microsoft® Windows Vista® Enterprise

• The product names of Windows 7 are as follows:

Microsoft® Windows® 7 Starter

Microsoft® Windows® 7 Home Premium

Microsoft® Windows® 7 Professional

Microsoft® Windows® 7 Ultimate

• The product names of Windows Server 2003 are as follows: Microsoft® Windows Server® 2003 Standard Edition Microsoft® Windows Server® 2003 Enterprise Edition

• The product names of Windows Server 2003 R2 are as follows:

Microsoft® Windows Server® 2003 R2 Standard Edition Microsoft® Windows Server® 2003 R2 Enterprise Edition

• The product names of Windows Server 2008 are as follows:

Microsoft® Windows Server® 2008 Standard

Microsoft® Windows Server® 2008 Enterprise

• The product names of Windows Server 2008 R2 are as follows:

Microsoft® Windows Server® 2008 R2 Standard

Microsoft® Windows Server® 2008 R2 Enterprise

INDEX

A	Initial settings (Scan to folder)	7
	Interface settings	7
Access Control	IP address	
Administrator mode	IPsec	3
	IPVO	3
Auto e-mail notification	The state of the s	
autonet		1.
	logout	
С	Logout	
Changing the machine name	32	
D	<u>M</u>	
devicename	Manual	
dhcp	Manuals for this machine	
DHCP33, 0	Message	5
dhcp6	N1	
DHCPv634, 0		5
Displayed information		
dns	3.4	
DNS(Domain Name System)	34	
Domain Name Settings		2
domainname		
Dynamic DNS	70	
E	passwd	
	pathmtu	
E-mail notification	POP before SMTP authentication Protocol information	
F	Protocol Information	4
File transfer settings	74 R	
ftp	B	30
G	route	4
	Routing Table	4
Guest mode	12 rsh	5
н	S	
help	37 set	4
Help	19 Setting items	1
hostname	•	
I.	show	
	smb	
ifconfig	37 SMTP authentication	
Initial settings (Document server)	80 snmp	
Initial settings (e-mail)	76 sntp	
Initial settings (Network delivery scanner)	78 Specifications	
Initial settings (Network TWAIN scanner)	79 '	

ssdpssh	50 50, 59		
		System settings	73
		T	
		TCP/IP	37
		TCP/IP address	37
telnet	30, 68		
Top page	10		
U			
Universal plug and play	51		
upnp	51		
User authentication	12		
W			
web	51		
Web Image Monitor	9, 12, 51, 68		
wins			
WINS Server			

MEMO

MEMO

